
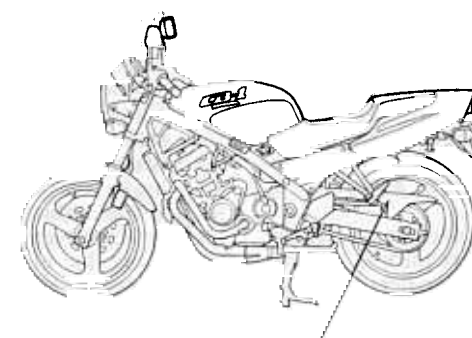


⚠ WARNING
DO NOT REMOVE RADIATOR CAP WHILE THE ENGINE IS HOT. ALLOW THE ENGINE TO COOL BEFORE DRAINING. SEVERE SCALDING MAY RESULT.

⚠ CAUTION
CHECK THE COOLING SYSTEM FREQUENTLY BY OBSERVING THE COOLANT LEVEL IN THE RESERVE TANK. ADD NECESSARY COOLANT TO THE RESERVE TANK FILLER OPENING.
ONLY USE A 50/50 SOLUTION OF ANTIFREEZE OR SUMMER COOLANT AND DISTILLED WATER TO AVOID POSSIBLE OVERHEATING THAT CAN LEAD TO ENGINE DAMAGE.

⚠ DRIVE CHAIN CAUTION

- THIS CHAIN CONTAINS RUBBER SEALS. DO NOT STEAM CLEAN OR USE SOLVENTS. REDUCED CHAIN LIFE MAY OCCUR IF MAINTENANCE INSTRUCTIONS ARE NOT STRICTLY FOLLOWED.
- CHAIN SLACK SHOULD BE 15—25 mm (5/8—1 IN) WHEN ADJUSTED AND NEVER BE ALLOWED TO EXCEED 50 mm (2 IN).
- LUBRICATE WHENEVER CHAIN APPEARS DRY. INSPECT AND LUBRICATE EVERY 1,000 km (600 MILES). USE SAE 80 OR 90 GEAR OIL ONLY.
- REPLACE CHAIN WHEN RED ZONE ON LABEL REACHES INDEX MARK WITH CHAIN SLACK SET TO 15—25 mm (5/8—1 IN).
- REPLACEMENT CHAIN: DID 525V8 OR RK 525SM4
- READ OWNER'S MANUAL CAREFULLY.



TIRE INFORMATION				THIS MOTORCYCLE IS EQUIPPED WITH TUBELESS TIRES	
COLD TIRE PRESSURES:				MAXIMUM WEIGHT CAPACITY:	
(UP TO MAXIMUM WEIGHT CAPACITY)				157 kg (347 lbs.)	
(UP TO 90kg (200 lbs.) LOAD)				MIN. RECOMMEND TIRE CENTER TREAD DEPTH	
				(FRONT) 1.5mm (0.05in) REAR 2.0mm (0.08in)	
				Read Owner's Manual	
TIRE BRAND	BRIDGESTONE		DUNLOP		
TIRE SIZE	FRONT	110/70-17 54H 0547	110/70-17 54H K505F		
	REAR	140/70-17 60H 0549	140/70-17 60H K509		