

MOTORCYCLING

MAINTENANCE SERIES

General Editor
BERNAL OSBORNE
of Motor Cycling


MATCHLESS
MOTORCYCLES 1939-55
SINGLE-CYLINDER 347 c.c. and 498 c.c.
and
EX-W.D. 347 c.c. MODELS

First published 1958


©TEMPLE PRESS LIMITED, 1958



TEMPLE PRESS LIMITED
BOWLING GREEN LANE, LONDON, E.C.1

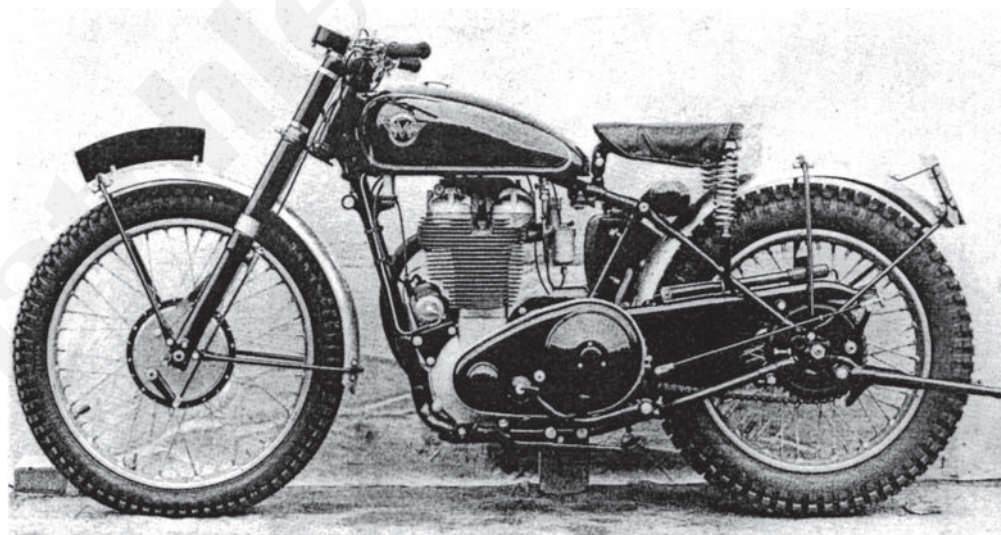

A maker's definitive photograph by courtesy of Motorcycle Sport for the 1953 500 cc Matchless. G80C shown here in trials guise with light-alloy motor, pre-Monobloc carburetter, rigid frame, Burman box and the AJS-style of forward mounted magneto introduced from September 1951. The Lucas instrument here is of course the Wader type. It has the new-type front brake brought in September 1952, the fullwidth front hub not arriving until 12 months later

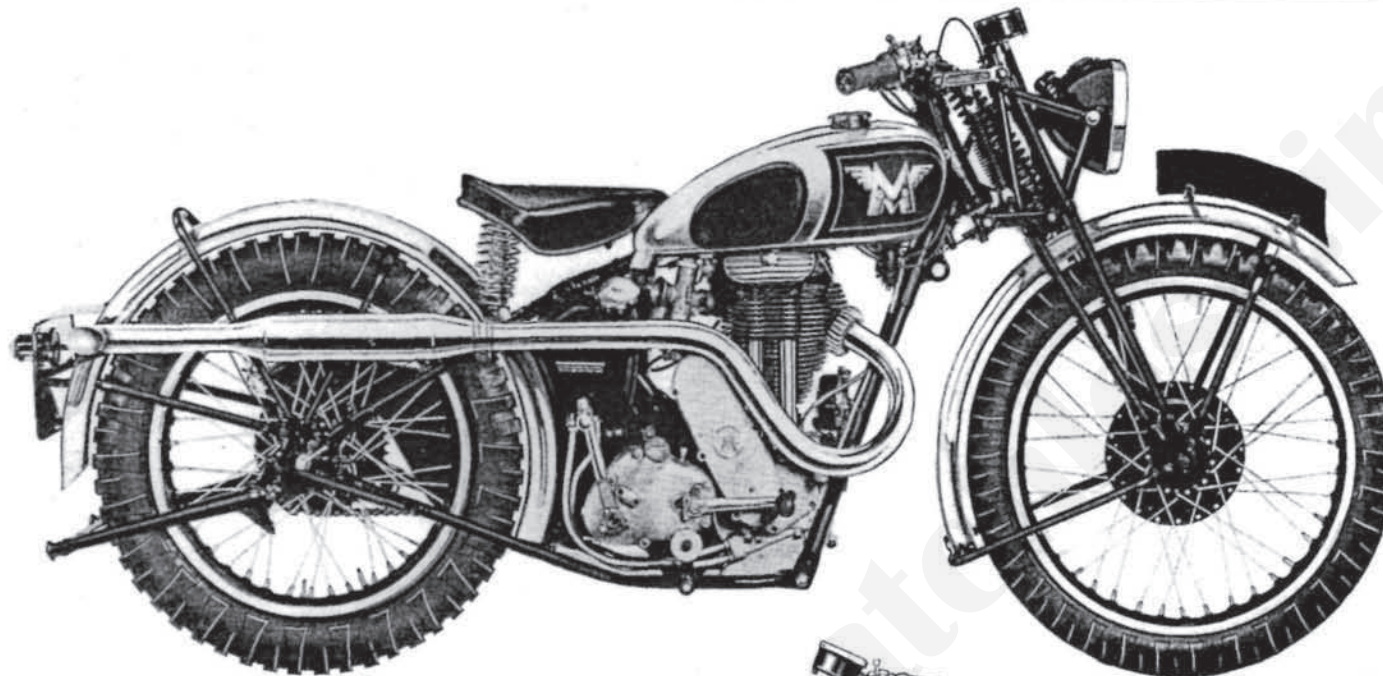


(Left) Another maker's definitive photograph showing the 350 cc G3C as it was in 1938 with of course girder forks and the stylised M symbol on the chromed tank

IMPORTANT NOTE

Since the text was written for the original book, AMC Ltd has passed into other hands and the Woolwich factory has been demolished. Comments about overhaulers referring to the makers should be read in this light. Spares and specialist service are now concentrated in the hands of a few UK dealers who include Messrs Hamrax and Joe Francis Motors —

Reg Hide

Maker's definitive photographs by courtesy of Motorcycle Sport

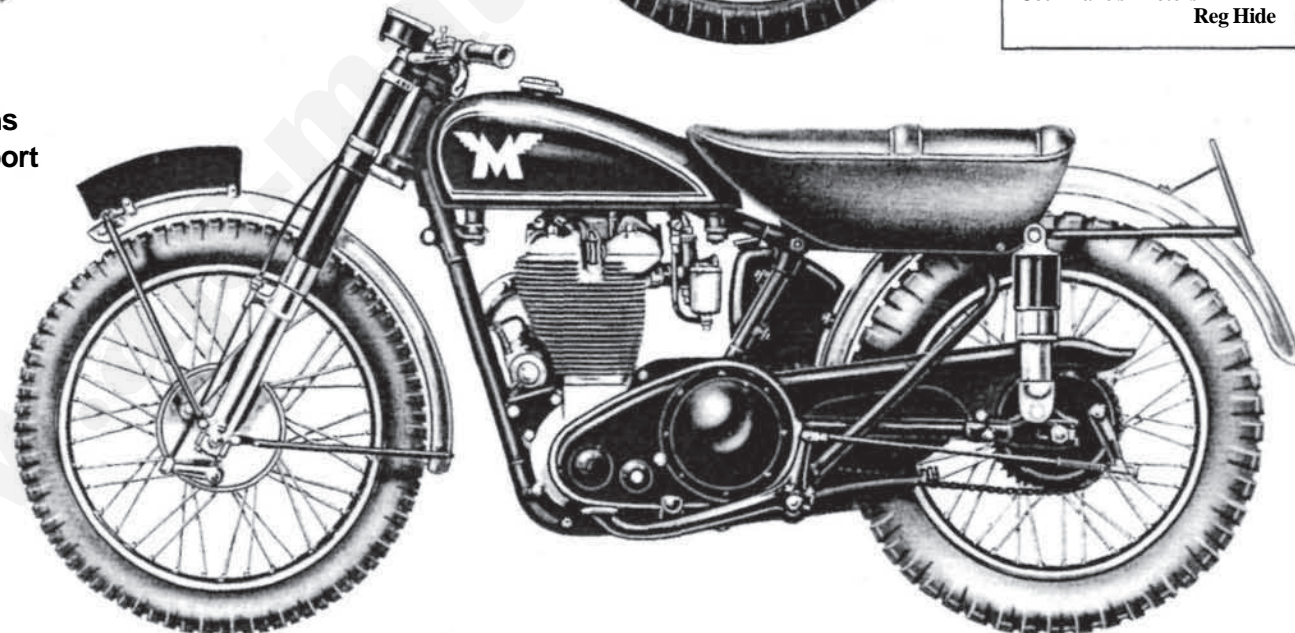

Again a factory photograph. The 1954-season 500 cc G80CS introduced from September 1953 with the new for that year full-width front hub of 7-inch diameter brake, lightweight welded front frame and a twin seat. Rear legs are AMC's own Jampots. The alloy motor has the magneto forward mounted of course

FOREWORD TO THE ORIGINAL BOOK

This book is a practical guide carefully compiled to enable both the new owner and the expert to carry out routine maintenance, complete overhauls, and to service those Matchless single-cylinder machines built between 1939 and 1955. It will also be of assistance to dealers' service staff as the comprehensive information provided in the text is culled from extensive experience in servicing these machines.

To obtain maximum efficiency, reliability, and long life from component parts, regular and systematic maintenance is essential. Performance, too, is likely to be improved if careful attention is given to the instructions outlined in these chapters. The aim throughout has been to guide the reader step by step through the sequence of dismantling and reassembly, paying particular attention to the elimination of defects, and so avoiding those trial and error methods which can prove so frustrating and, in the end, so expensive.

Chapters are devoted to ex-WD machines, giving conversions that will improve performance; and to trials and scrambles machines. Technical data and illustrations of special tools recommended and used by the manufacturers are included in the text.

Finally, the Publishers wish to make grateful acknowledgment to Associated Motor Cycles Ltd. for permission to reproduce a number of their copyright drawings in the text —

BERNAL OSBORNE, Temple Press Ltd.

CONTENTS

| | |
|--|-----------|
| Definitive photographs | 1 |
| Decarbonising the engine | 3 |
| Servicing the engine | 5 |
| Overhauling the engine | 9 |
| Reassembling the engine | 11 |
| Pre-1955 Carburetters | 14 |
| The 1955 Monobloc carburetter | 15 |
| The CP-type Burman gearbox | 16 |
| The 852-type Burman gearbox | 18 |
| The clutch | 18 |
| Competition and scrambles models | 19 |
| The transmission | 21 |
| Forks and frames | 22 |
| Wheel bearings | 25 |
| Brake adjustment | 26 |
| Dynos | 26 |
| Electrical equipment | 27 |
| Definitive photographs | 28 et seq |
| WD-G3L drawing | 31 |
| Definitive photograph | 32 |
| Wiring diagrams | 33 et seq |
| WD-G3L section | 35 |
| Useful data | 37 et seq |
| Engine design changes | 40 et seq |
| Permissible modifications | 41 |
| WD-G3L illustrated spares lists | 42 et seq |
| Maker's 1948 advertisement | 59 |



An official photograph, courtesy of Motorcycle Sport, revealing the side and rear of the AMC factory at Plumstead, taken from the corner of Barrage Grove. The front, hidden here, is in the parallel Plumstead Road. Date is unknown but certainly is the early 1950's

EDITOR'S PREFACE

The only workshop manual currently in print for Matchless 350 and 500 cc heavyweight singles, this book has had considerable extra material added by the publishers, Bruce Main-Smith Ltd. I have included an expanded WD-G3 and WD-G3L section which also features the factory illustrated spare parts lists in full on the military 350's; my thanks to Mr J.C. Martin of Letghton Buzzard for the loan of a set of mint-condition lists for this purpose.

There is also a greatly increased amount of tabular information not found in the original Temple Press edition.

The machines covered are of course those the factory came to call (at a later date) heavyweights, to distinguish them from the lightweight 250 and 350 cc ohv singles with their Phil Walker designed engines, gearboxes and frames introduced in June 1958 under both AJS and Matchless brand names by Associated Motor Cycles Ltd, then of Plumstead Rd, Woolwich, London SE18. The heavyweights can be instantly identified by their usage of a conventional oil tank behind the engine. The lightweights used no oil tank as such, lubricant being carried dry-sump-wise in a reservoir cast integrally with the crankcases.

Though there are differences between early postwar AJS and Matchless heavyweights — notably the positioning of magneto and dynamo — this workshop manual will serve reasonably well for AJS too. Cams as manufactured by AMC were dual marked for both engines. Otherwise the motors were broadly similar and of course the cycle parts were identical other than for insignia and detail differences attendant on dynamo/magneto mountings and drives.

Both types of Burman box are dealt with in full. The AMC gearbox was not phased in until April 1957 and is outside the scope of this manual — REG HIDE, Editor.

1. DECARBONIZING THE ENGINE

Beyond the limit of periodic maintenance and running adjustments, the work involved in decarbonizing a motorcycle engine is likely to constitute the first venture by the owner into the rather deeper technicalities of his machine. It is necessary, on an average, every 5,000 miles or so, to clean away carbon deposit from the inside of the power unit —just as one would clean a domestic flue and get more efficient combustion thereby. The job is an interesting one and usually not too difficult to be carried out with the tools in the kit plus the few additional items listed.

The engine should be decarbonized only when it shows a definite sign of requiring attention. A gradual loss of power, poor compression, difficulty in starting, combined with an increase in petrol consumption, are all signs that decarbonizing is necessary. Conversely, some owners prefer to decarbonize at fixed intervals of between 5,000 to 8,000 miles.

The risk in prolonging the interval between decarbonizing the engine is the possibility of exhaust-valve burning.

Checking the compression from time to time will enable the owner to decide if compression is satisfactory or otherwise. It is imperative that the push-rod adjustment is correct, also that the throttle is fully open when this check is made.

As work of this kind is usually carried out at week-ends, have ready the necessary tools and spares, so that it can be completed without delay.

Suggested equipment for this purpose is listed below:

- (i) Decarbonizing gasket set.
- (ii) Valve spring compressor.
- (iii) Short length of rubber tubing with a ¼-in.-diameter bore with a nail through one end to act as a tommy bar.
- (iv) Scraping tool, such as a cheap 6-in. steel rule with the corners ground off.
- (v) Grinding paste, jointing compound, clean rag and washing gear.

Dismantling

To start dismantling, remove:

- (i) Petrol tank and petrol pipe.
- (ii) Exhaust pipe with silencer attached to it.
- (iii) Sparking plug after detaching H.T. cable.
- (iv) Throttle and air slides, leaving the needle in position. (Wrap these parts in clean rag and secure them to the handlebar lug to avoid possible damage.)
- (v) Rocker-box oil pipe; use two spanners, one for the pipe nipple nut, the other to prevent the union from turning.
- (vi) Cylinder head steady stay, if used.
- (vii) Valve-lifter cable (for engines after 1948).

- (viii) Three nuts and washers securing the cover for the rocker box; take off the cover, turn the engine until both valves are closed then release all bolts securing the rocker box to the cylinder head.

Tilt upwards the right side of the rocker box and extract the two long push-rods. The rocker box can now be lifted off.

Whilst the two push-rods are identical, it is preferable to refit them in the original position. They should be marked suitably for correct order of replacement. Remove:

- (ix) Two valve end caps (for engines before 1949), then the four cylinder-head holding-down bolts; the cylinder head can now be taken away.

If it is difficult to separate the cylinder head from the barrel, place a short piece of wood under the exhaust port and give the free end a series of light blows to cause separation. Remove:

- (x) Push-rod cover tubes; watch for a thin steel washer which may be fitted on each tube below the sealing rubbers.
- (xi) Carburetter mixing body and float chamber attached* This can be dealt with later.

In all probability the rocker-box gasket or pieces of it will stick to the cylinder head. These can be removed with the steel rule previously mentioned, taking care to ensure that particles do not obstruct the oil drilling in the cylinder head.

Before removing the valve springs and valves, scrape the carbon deposit from the cylinder-head sphere, also from the heads of both valves. The small amount of carbon remaining can be removed after the valves have been extracted.

To remove both valves, a valve-spring compressor is required. The springs should not be compressed unduly and only sufficient to extract the valve collets. A sharp, light blow on the valve collar will help to separate the collar from the collets.

On the 500 cc models both valves are similar in size, but different in material. Valves are marked IN or EX on the valve end above the collet groove. On the 350 cc models the inlet-valve head is larger in diameter than the exhaust.

With valves removed, scrape off the residue of carbon from the cylinder head, remove also all traces of burnt oil or carbon from inside the exhaust-valve guide, using a piece of emery cloth (most important on engines made *before* 1949), then get rid of all particles of carbon from the ports and valve guides before starting to grind-in the valves. Scrape the exhaust-valve stem and head; if emery cloth is used on the valve stem, clean and polish with an up-and-down movement, not rotary, as the valve stems are hard-chromed during manufacture.


A short piece of rubber tubing of ¼ in. internal diameter, pushed over the end of the valve, is a suitable tool for valve grinding.

To grind the valves, apply a little fine-grinding paste on the valve face, insert the valve into the head and press the rubber tube on to the valve end. Holding the rubber tubing, pull the valve lightly on to its seating and turn the valve forward and backwards, raising the valve occasionally off its seating, and continue the process until the grinding compound ceases to "bite."

When an even matt surface is seen on both the valve and the seating in the head, grinding is complete.

Badly pitted valves, or valve seats, should be resealed by refacing the valve and recutting the valve seat in the cylinder head. The valve angle is 45°. Excess valve

FIG 1

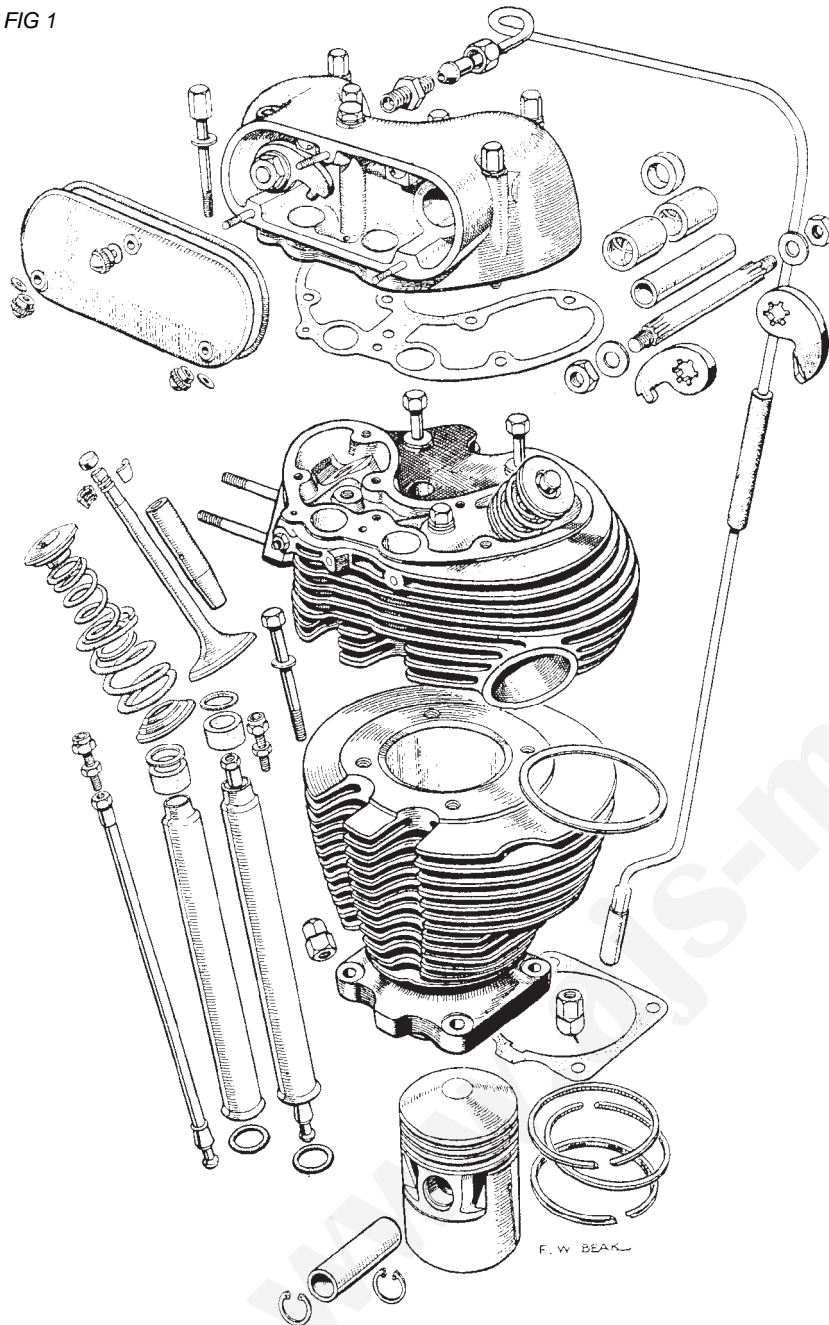

Top-half components of the Matchless WD-G3L circa 1941

grinding must be avoided, particularly as the valve seats in light-alloy heads are not replaceable.

After valve grinding, wash the head and valves in petrol, check oil passages in the valve guides and ensure that all trace of grinding paste is removed. Pass a piece of non-fluffy rag through each valve guide in turn, one way only, and then squirt clean oil through passages in the head for guide lubrication.

Check the valve springs for free length. If the free length has decreased $\frac{3}{16}$ -in. or more, fit new springs.

Oil both valve stems and reassemble with springs, taking care that both collets are correctly located in the two grooves on the valve stem.

To check if the valves are seating correctly, wipe off oil from both valve heads and the sphere of the cylinder head. Hold the head with the exhaust port vertical and nearly fill the port with petrol. If after a few minutes petrol does not seep past the valve, the seating is in order. Empty out the petrol, and if petrol is spilled into the sphere of the head wipe it dry and repeat the test for the inlet valve, after which the head can be put aside.

Set the piston on the top of its stroke, carefully scrape off carbon formed on the piston crown, using the recommended tool. The ridge of carbon formed in the cylinder barrel should also be removed. Afford a little time in which to remove the particles of carbon trapped in the gap formed by the top land of the piston and cylinder wall.

If the cylinder is removed to examine piston rings for gas leakage, do not remove the rings unless it is necessary. Gas leakage is indicated by black or brown portions on the ring bearing face.

Renew the cylinder-base gasket before refitting the cylinder.

Reassembly

The use of new gaskets is most desirable if one is to avoid again taking down the engine after reassembly in order to rectify oil leaks and a leaking cylinder-head joint. Cylinder-head gaskets of the solid-copper type can be used again if not distorted or showing ovality in the bolt holes, by heating them until cherry red and then plunging into cold water. This will make the gasket ductile. Renew the two bottom push-rod tube rubbers.

Start assembling by:

- (i) Turning the engine until the piston is on the top of its stroke with both tappets down.
- (ii) Place new sealing rubber over each tappet.
- (iii) Pull out and discard the two sealing rubbers for the push-rod tubes in the cylinder head. Watch for the steel washer on top of each rubber; press new rubbers into position, apply a little jointing compound on the top end of each push-rod tube and insert them into the head with a rotary motion,
- (iv) Clean the threads for the cylinder-head bolts and apply a little graphite grease to facilitate subsequent removal.
- (v) Put in position the cylinder-head gasket and place the cylinder head and cover tubes into the cylinder barrel.

Some care and patience is needed at this stage to verify that the head gasket is located accurately when the head bolts are passed through the cylinder head. Lift the head slightly and see if the bolts go through the four gasket holes correctly, then tighten down the head bolts diagonally until all four are firmly tightened. If a

torque spanner is available, set it to 36 lb.ft.

Note: On early models the space between the carburetter air intake and oil tank is restricted; it is therefore preferable to fit the carburetter to the cylinder head before refitting the head and *after* dealing with the carburetter as detailed later.

Oil both push-rod ends before placing them in the push-rod tubes.

A new rocker-box gasket must be used, and this can now be placed on the cylinder head. On engines made before 1949 there is a projection on the gasket with a hole in it which must register with the oil-feed hole in the cylinder head lubricating the inlet-valve guide.

Refit the two valve end caps (on engines *before* 1949).

Clean both faces of the rocker box; fit the centre rocker-box bolts first, put the rocker box into position, tilt it and engage the push-rods with the two rocker arms, tighten lightly the centre bolts, fit the remaining bolts and tighten all down evenly and diagonally.

Remember that a soft gasket is used and exercise care by not over-tightening these bolts, which may stretch or break if undue force is used.

Both valves *must* be closed when rocker-box bolts are tightened, and with the engine in this position adjust push-rods so that there is no noticeable up-and-down movement with free rotation. For engines with iron cylinder heads this adjustment is made with the engine cold.

The petrol tank may be replaced temporarily so that the engine can be run for a short period to settle the valve gear when a final adjustment can be made after the engine has cooled down. On engines with alloy heads make this adjustment with the engine reasonably warm.

Finally, before fitting the petrol tank and the rest of the parts removed, adjust the throttle and air cables to take up slack; neatly arrange these cables, the H.T. wire and lighting harness, which should be attached to the frame top tube with clips or adhesive tape.

Avoid over-tightening the petrol-tank fixing bolts and secure these with copper wire run through holes in tank bolts, thus joining front and rear bolts in pairs.

2. SERVICING ENGINES

Heavy Oil Consumption


If the machine has covered considerable mileage with a gradual increase in oil consumption, the cause can be due to worn or broken piston rings, cylinder wear, or a combination of both.

The normal ring gap is 0.006 in. with a permissible maximum of 0.030 in. The ring clearance in its groove is 0.002 in.

Should cylinder wear exceed 0.008 in., the cylinder should be rebored and a suitable oversize piston used.

When fitting new piston rings a chromium-plated compression ring for the top ring groove should be used, since this will minimize cylinder wear. These rings, when new, have a slightly tapered exterior and are marked with the word TOP on one side to indicate assembly position.

FIG 2

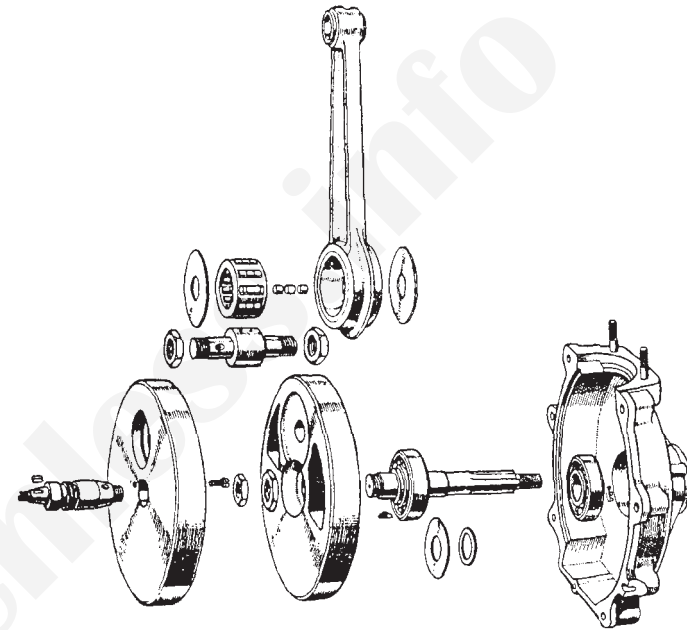

Bottom-half crankshafts with drive-side crankcase.
(Above) For 1945-1954 models, (Below) For 1955-on

FIG 3


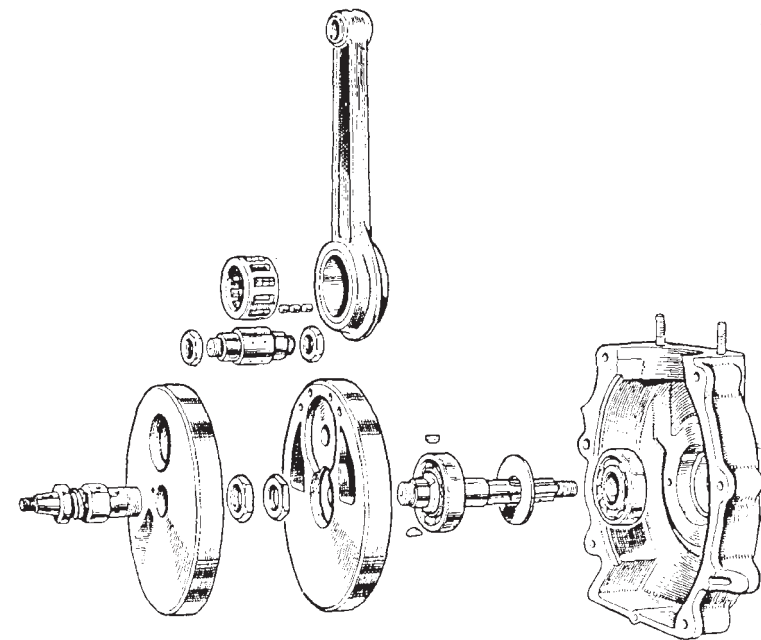


FIG 4

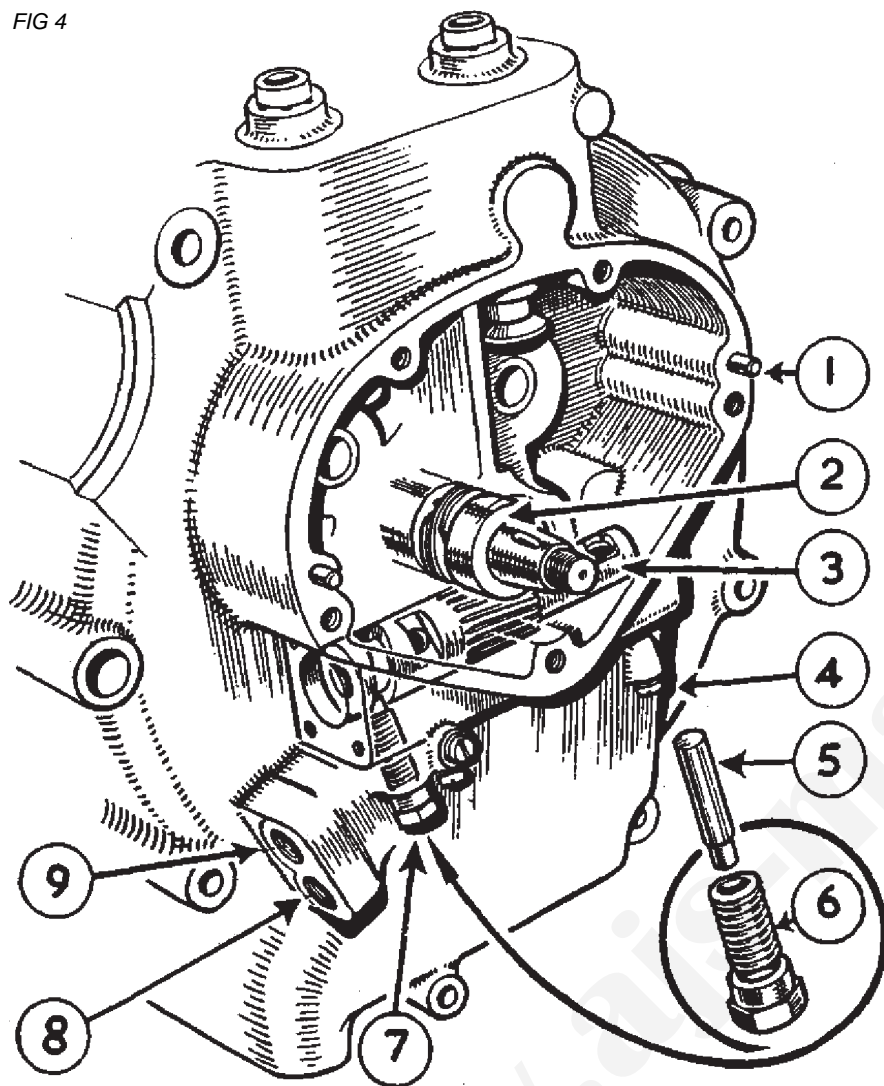

Inset is the fixed guide screw which engages in the scroll grooved in the plunger body whereby reciprocating action is added to the rotation of the plunger

- | | |
|--|--|
| 1. Dowel peg, locating timing-gear cover | 6. Screwed body for guide pin |
| 2. Timing-side flywheel axle with integral gear for driving oil-pump plunger | 7. Guide pin in position engaged in profiled cam groove of plunger |
| 3. Oil-pump plunger | 8. Tapped hole (for oil-feed pipe to pump) |
| 4. Screw (one of three) | 9. Tapped hole (for pipe returning oil to oil tank) |
| 5. Guide pin | |

An incorrectly set oil-regulating screw, which controls oil supply to inlet valve, can affect oil consumption. The correct position for this screw is half a turn open from the fully-closed position. Worn valve guides will allow oil to enter the combustion chamber.

Evidence of an excessive amount of oil in the valve-spring chambers can be due to oil building up in the push-rod cover tubes on early-type engines.

The use of a later-type tappet guide with six slots, described in Chapter 3, "Overhauling the Engine," will enable oil to drain into the timing chest more freely.

Excessive Smoke on Starting

The cause can be due to the details given for heavy oil consumption, or excessive oil in the crankcase due to bad scavenging; alternatively, oil seeps into the crankcase when the engine is stationary. Bad scavenging can be caused by an air leak between the cap covering the rear end of the pump housing or obstruction in the oil passage from the sump to the pump.

In the event of oil seepage, this is usually due to a worn or scored pump-plunger housing in the crankcase.

To decide if seepage occurs, use a dipstick to measure the oil level in the tank, then check the oil level again after the machine has been standing overnight. If the level has fallen the timing-side crankcase should be sent to the manufacturer for examination and possibility of bushing the pump plunger bore.

Restriction in the oil-tank filter will affect the oil return from the sump,

Oil Pump Plunger

This part of the engine should not be disturbed unless the crankcase is dismantled or the oiling system becomes defective. The small hexagon bolt housing the pump-guide pin, situated at the rear end of the plunger housing, is often mistaken for a drain plug. If this bolt is unscrewed, either intentionally or unintentionally, the pump plunger will be damaged beyond further use when the bolt is tightened if the guide pin is not correctly located in the groove machined in the plunger.

To ensure correct location the cap at the rear end of the plunger housing should first be removed. If a short piece of spoke or stiff wire is inserted into the hole drilled in the plunger, this can be moved slightly inwards and outwards during the process of screwing home the pump-guide pin bolt by hand, and finally tightening it with a spanner when correct location is effected.

Excessive tooth wear in one particular position indicates a restriction in the feed line. This can be due to a blocked oil passage in the timing-side axle, the crankpin or an obstruction in the rocker-box oil-feed line. Slight uniform tooth marking is normal on engines that have covered a considerable mileage.

If the pump plunger is damaged after an engine overhaul, the timing-side axle or crankpin are incorrectly located (see Chapter 3, "Overhauling the Engine").

If all the teeth are badly damaged the main-bearing spacing washer may be worn (see the section on "Flywheel Assembly.")

Rocker Box Oil Supply

If the oil supply to this part of the engine is gradually reduced or stops entirely, wear at the end of the pump guide pin has developed and a new pin should be used.

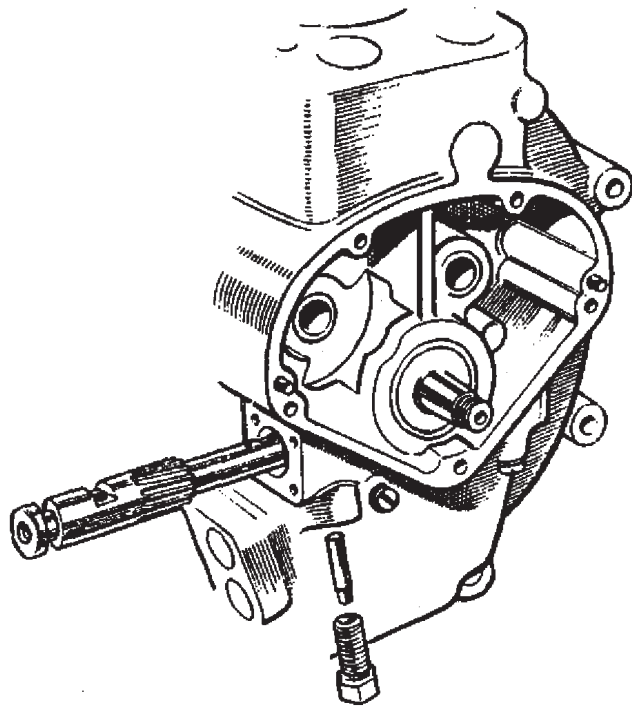


FIG 5

Correct assembly of the oil pump. The spiral groove at the end of the pump plunger must mesh with stationary peg shown at the bottom of the sketch; the plunger should both rotate and reciprocate when the engine is turned by hand

An incorrectly located paper gasket used between the front pump end-cap and crankcase will also stop the oil supply.

Crankcase Release Valve

This valve will be found on the driving-side crankcase, behind the primary chaincase, and has a short copper pipe attached to it. The valve is a steel disc or diaphragm, retained in the valve body, which has a serrated seat; the disc moves towards the serrated seat as the piston descends, allowing pressure in the crankcase to escape into the atmosphere.

If the disc is trapped between the valve body and the crankcase it will not operate and will cause oil leakage from engine joints. It will also cause oil to accumulate in the push-rod cover tubes and cause the engine to smoke badly.

If this valve is dismantled, place a little grease on the serrated seat to retain the disc in position whilst the valve is refitted*

Oil Leaks

First ascertain the exact position of leakage as oil can run down the back of the push-rod cover tubes and give the impression that the leak occurs at the cylinder-base joint.

Oil leakage at the cylinder base can only be due to loose cylinder nuts or a damaged paper gasket provided that the crankcase face is not bruised or otherwise damaged.

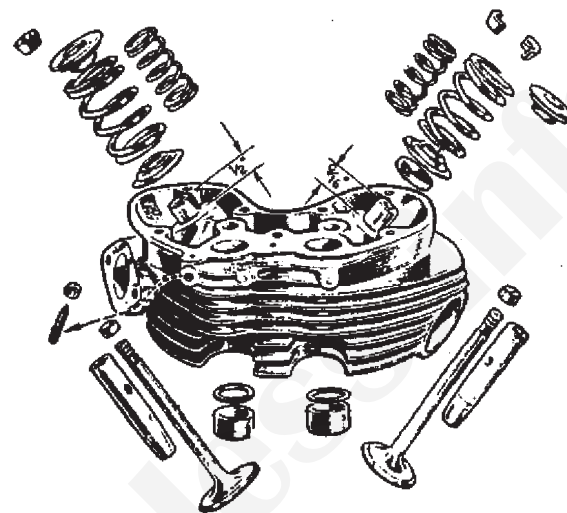


FIG 6

The oilways in the valve guides and in the head must align

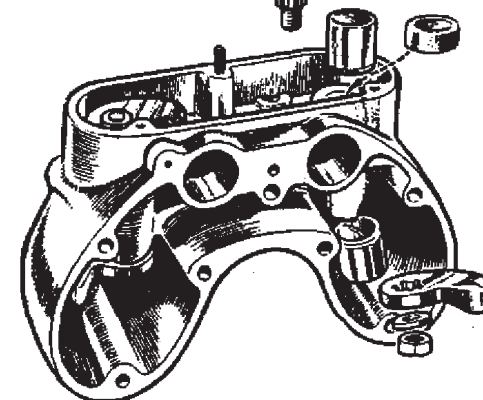


FIG 7

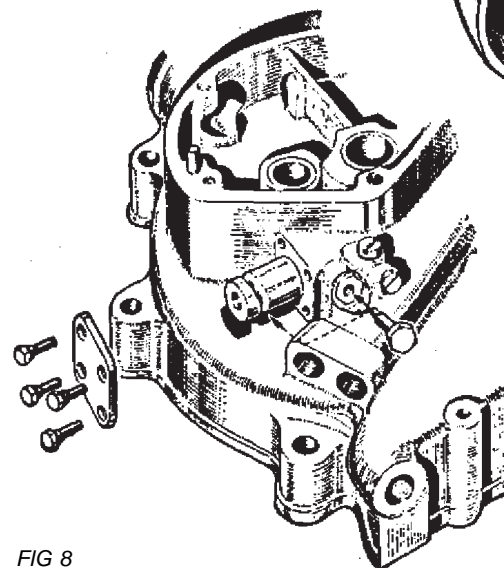


FIG 8

Part-disassembled arrangement of the Matchless oil pump

Defective rubber sealing rings at the top and bottom of the push-rod cover tubes will cause oil leakage. If the cover tubes can be moved, there is insufficient pressure on the oil seals.

To remedy, fit a $\frac{3}{64}$ -in. steel washer on the reduced end of the cover tubes below the top sealing rubbers in the cylinder head.

An oil leak from the metal cap in the timing cover can be cured only by fitting a new cap. Pierce a hole in the cap and prise it out, wash the aperture with petrol, apply jointing compound on the outside rim of the cap and tap it into position. Let the jointing compound set before starting the engine.

Exhaust Valve Seizure or Sluggishness

The symptoms of this trouble are misfiring — the engine cuts out with a sudden increase in push-rod noise, usually after driving fast or after climbing a gradient. Engines with light-alloy heads are not usually affected with this trouble as the cylinder-head temperature is lower under normal driving conditions.

A heavy formation of carbon or burnt oil on the exhaust-valve stem and in the guide bore causes the valve to become sluggish and possibly to seize when the engine temperature increases.

To remedy, the head must be removed from the cylinder so that all carbon or burnt oil deposited on the valve stem and its guide can be removed (see Chapter 1, "Decarbonizing the Engine"). Reducing the oil supply will prevent a repetition, which can be effected by inserting a short piece of $\frac{3}{16}$ -in. outside diameter tube into the hole in the rocker box, which feeds oil by gravity to the exhaust valve. The tube should protrude $\frac{3}{16}$ -in. to $\frac{1}{4}$ -in. above the rocker-box case.

As an alternative, a copper or aluminium plug with a small flat filed on it can be inserted into the oil hole in the cylinder head, which registers with the exhaust-valve oil-feed hole in the rocker box.

Hairpin Valve Spring and Collar Wear

Engines made from 1949 up to 1953 are most likely to be affected by this kind of wear and then usually the inlet spring only shows signs of it. This can be prevented by increasing the oil supply to the inlet-valve rocker arm.

To modify, enlarge the oil hole drilled in the boss for the rocker axle to $\frac{3}{16}$ -in. Obtain a metering plug from the manufacturer, Part No. 018890, and insert this into the enlarged hole. This plug has a small hole at one end; insert this end first and tap the plug home. A further light tap with a centre punch will prevent the plug from moving.

This adjustment reduces the oil supply to the exhaust valve, which is already generous, and increases the oil feed to the inlet rocker. Later-type rocker arms, valve end only, have a groove machined on the face of each rocker to convey oil to the valve end and valve-spring collar.

Wear on Valve Ends and Rockers

Wear on the valve-stem tips will certainly take place if engines made before 1949 are used without the hardened valve end-caps. Engines made from 1949 are fitted with heat-treated valve-stem tips and are of a different overall length (see Tables). If the wear is slight the valve, after removal, can be turned 90° to its original position, as wear by contact with the rocker forms a groove across the valve end.

A permanent cure is to grind $\frac{1}{32}$ -in. off the valve end and employ the hardened valve-end caps used on earlier-type engines.

The oil modification to the rocker box should be included if the engine is made before 1954. If the rocker is slightly worn it can be stoned, otherwise replaced.

VALVE LENGTH

| Model | cc | Inlet Exhaust |
|---------|-----|------------------------|
| 1946-48 | 350 | 4 $\frac{1}{16}$ -in. |
| 1946-48 | 500 | 3 $\frac{15}{16}$ -in. |
| 1949-57 | 350 | 4 $\frac{3}{16}$ -in. |
| 1949-57 | 500 | 4 $\frac{1}{16}$ -in. |

Valve Guides

All types are a force fit in the cylinder head and the guide protrusion away from the port is of paramount importance. (See overleaf.) They are made from chilled cast iron, are hard and somewhat brittle, therefore care to avoid breaking the guide during the process of removal or refitting is most necessary.

To remove guides on iron cylinder heads, clean off burnt oil from the guide, where it protrudes above the port, with emery cloth. With the head supported on a bench, use a suitable drift to drive out the guide, or use a hand press if available.

When dealing with alloy heads, the head must be heated before attempting to remove a guide, otherwise damage by enlargement of the guide bore will take place. First ascertain if a circlip is fitted to the exhaust guide; this is a standard fitting in all models after 1955. If a circlip is fitted, heat the head, tap the guide up through the port so that the circlip can be prised out of its groove. Reheat the head and follow the instructions given for iron heads.

Refitting Valve Guides

To ensure that the guide starts parallel with the guide bore, insert the valve into the head, press the valve firmly on to its seat. Retaining the pressure, place the guide over the valve and ensure that the oil hole is properly aligned; then press the guide down as far as possible and, finally, tap the guide home to the specified protrusion.

Loose Valve Guide

Removing the exhaust-valve guide on alloy cylinder heads without pre-heating is usually the cause of this trouble. As a new head is expensive, a satisfactory repair can be made by copper plating the external diameter of the guide to the extent of 0.003 in. to 0.004 in. to close up the interference fit. Use a guide machined for a circlip, together with a later-type valve-spring seat. If a radius is ground on the valve-spring seat to clear the circlip, the original seat can be retained.

Valve Guide Protrusion

Before 1948. Inlet-valve guide, $\frac{1}{2}$ -in.; exhaust-valve guide, $\frac{5}{8}$ -in.
 After 1948. Inlet-valve guide, $\frac{1}{2}$ -in.; exhaust-valve guide, $\frac{1}{2}$ -in.

Camshaft Wear

If the peak of either cam is bruised or badly worn, look for overloading on the valve-operating gear. The usual reason is that the valve springs are coil-bound when the valve is at full lift (coil-type springs) or the valve-guide protrusion is incorrect, causing the spring collar to foul the guide*

To check valve motion, turn the engine until the valve is at maximum lift. Place a box key on the nut retaining the push-rod rocker arm and endeavour to open the valve further; if further movement cannot be made the valve springs are solid or coil-bound and should be exchanged for a set of the correct type.

If the cams are badly damaged, check also both tappets for wear and see Chapter 3, "Overhauling the Engine," for removal drill.

Piston Slap

Engine noises of various kinds are often attributed to piston slap, which is caused only by excessive clearance between the piston and the cylinder. Piston slap is audible when the engine is pulling, or on changing up to a higher gear, but not when the engine is running light or without load.

Reboring the cylinder and using an oversize piston is the only remedy for a noise of this kind. The wire-wound piston which has been used for some time permits the use of a close running clearance of 0.001 in. with a reduced risk of piston seizure.

Engines made before 1947 can use this type of piston if the connecting rod is exchanged for a later type, as there is a difference of $\frac{1}{2}$ in. in the two connecting-rod lengths.

The small-end bush is not usually affected by premature or undue wear; therefore piston slap should not be confused with a slack small-end bearing.

Big-End Noise

If a light rattle develops, which becomes inaudible when the engine is pulling or under load, a little movement in the big-end assembly is usually the cause.

This does not indicate that the bearing is completely worn out, for it is often

possible to cover a further 8,000 to 10,000 miles without effect on the engine efficiency.

This noise can develop when there is an accumulated clearance between 0.0015 in. and 0.002 in. in the big-end assembly. It is possible that a new set of rollers will absorb movement; alternatively, fit rollers plus 0.001 in. oversize after lapping the connecting rod (see Chapter 3, "Overhauling the Engine"), provided the roller path on the crankpin and liner are undamaged.

Timing Gear Noise

This noise can develop when there is (a) an accumulated clearance between the camwheels and small timing pinion, (b) end-float between the cam which drives the magneto and the crankcase, and (c) wear on the bushes for the cams or a worn timing-shaft bush, which would affect teeth engagement on the timing gear.


First check for end-float by removing the magneto chain cover, run the engine to develop the noise and press on the end of the shaft that drives the lower magneto sprocket with a piece of wood or screwdriver handle. If the noise stops there is end-float, which is cured by removing the magneto drive and the timing-gear cover and fitting a shim washer either 0.005 in. or 0.010 in. thick over the shaft for the cam wheel before refitting the timing-gear cover.

Backlash can be verified by reproducing the noise and applying pressure on the top run of the magneto driving chain with a wooden screwdriver handle. If the noise stops, try first a new small timing pinion before replacing the cam wheels. If the noise persists, check for worn bushes.

Noise in the Rocker Box

A little end-float in the rocker axles is of no consequence. This movement can be taken up by tapping outwards one of the two bushes after removing the rocker arm, axle and sleeve. The rockers should move freely if the bushes are correctly located.

A distorted hairpin-type valve spring may make contact with the rocker box. Reversing the position of the spring may have the desired effect. Look also for a groove on the valve spring at the point where the rocker operates — this can also cause a noise. A slight radius ground on the rocker arm at the position of contact will prevent a recurrence. If the spring is badly grooved it should be discarded.

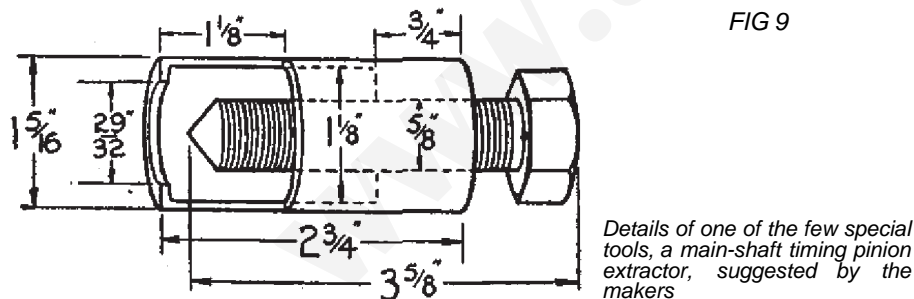

3. OVERHAULING THE ENGINE

Provided workshop facilities, together with an adequate supply of box keys and spanners are available, no great difficulty should be experienced in dealing with work of this kind,

Some thought on preparation for overhauling is desirable by having available such items as an extractor tool for the dynamo sprocket, a small timing pinion extractor, a spare parts list, a complete gasket set, jointing compound, preferably

of the type that does not flake, such as "Wellseal", wooden boxes to accommodate parts as they are removed. When dealing with engine work, cleanliness is vitally important both in the handling and fitting of moving parts.

Invariably the under surface of the crankcase is oily and impregnated by road grit, so start by cleaning the exterior of the engine before dealing with the interior; detergents or solvents are obtainable for this purpose.

A careful note as to the position of bolts, distance pieces and washers should be made during the process of dismantling; nuts and washers replaced on the bolts as they are removed will save time and patience when the machine is put together again.

Removing the Engine

Commence dismantling by following the instructions for decarbonizing the engine.

Proceed to remove:

- (i) The outer portion front chaincase and place a tray underneath it to catch the oil.
- (ii) The battery and strap securing its carrier to the back half of the chaincase.
- (iii) The clutch outer plate with springs and thimbles.
- (iv) The circlip and lock washer from the dynamo sprocket. Engage top gear, apply the rear brake and unscrew the engine sprocket nut, using a ring spanner and tapping the free end.
- (v) The gearbox mainshaft nut securing the clutch (early type 1-in. across flats, later type $1\frac{5}{16}$ -in.).
- (vi) The nut securing the dynamo sprocket nut with a thin spanner on the flats at back of sprocket to avoid bending the armature.

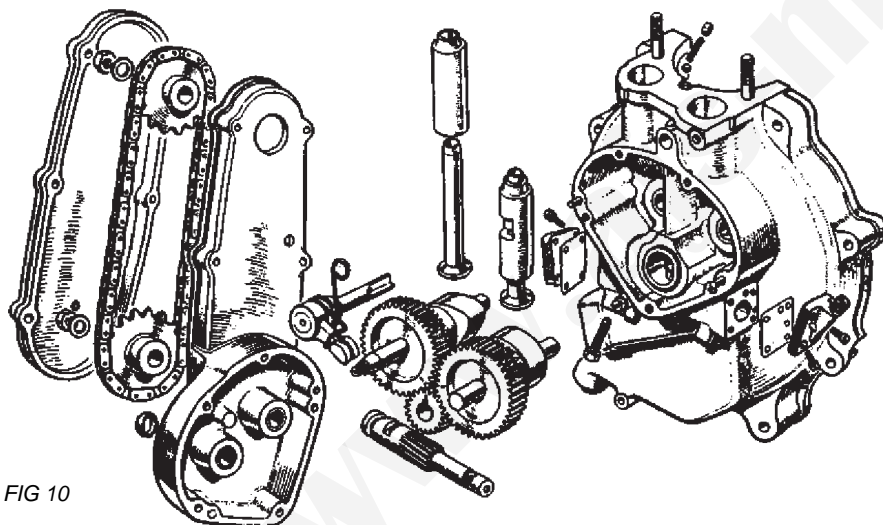


FIG 10

Exploded drawing of timing gear, valve actuating mechanism, and magneto drive. It also shows the oil pump parts, valve lifter parts and timing side crankcase of the WD G3L engine

The timing gear of the engine is a very simple arrangement. Inset are seen the tappets and guides and the oil pump rotor shaft of the WD engine

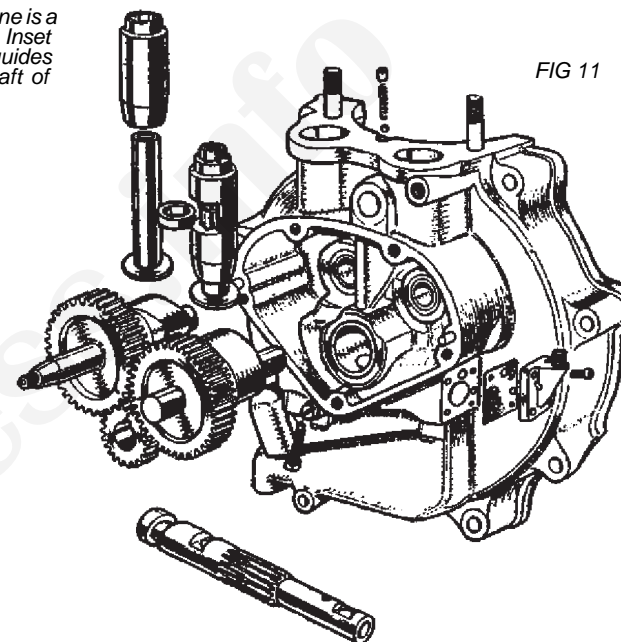


FIG 11

- (vii) Disconnect the front chain then take off the dynamo sprocket using wedge-shape tool.
- (viii) The clutch assembly; watch for 24 rollers, which will drop out
- (ix) The shock absorber assembly and engine sprocket with the distance piece at the back of it.
- (x) The rear portion of the front chaincase; straighten the three tab washers before applying the small box key.
- (xi) The bolt securing the chaincase to the engine and identify the location of the two dissimilar distance pieces.

Most of these parts will be oily or messy so keep them in a box away from engine parts.

Drain the oil tank and whilst this is taking place remove:

- (xii) Both oil pipes, tank end first, then the rocker-box oil-feed pipe.
- (xiii) The magneto chaincase cover.
- (xiv) Both sprockets for the magneto chain (magnetos with auto-advance are self-extracting). Use the dynamo sprocket tool for the top sprocket (early models) and a tyre lever (with its end bent at right angles) for the camshaft sprocket.
- (xv) The timing cover on the crankcase.
- (xvi) Disconnect the ignition control cable (handlebar end), and then remove the magneto platform with the magneto attached and identify the location of the distance pieces where fitted.
- (xvii) Remove all bolts passing through the crankcase and loosen the gearbox bolt nuts. It will be easier to lift the engine out of the frame if the cylinder is left in position, but it may be necessary to spring out the front frame down tube when the engine is lifted out.

Note.— When unscrewing the oil-return pipe nut (top nut) at the crankcase end, take care that the spanner does not touch the feed pipe nut (lower nut) thus creating a levering action on the lower nut *which can break the crankcase.*

DISMANTLING THE ENGINE

Thoroughly clean the exterior of the crankcase before it is placed on the bench, then remove the sump plug to drain the oil. Remove:

- (i) Both oil-pump end-caps, the pump guide pin, and take out the oil-pump plunger, before attempting to separate the crankcase.
- (ii) The small timing-pinion nut which has a *left-hand thread*.
- (iii) Both cam wheels.
- (iv) The timing pinion.
- (v) The bottom crankcase bolt if fitted.
- (vi) The cylinder barrel. If a compression plate is used it will come away with the cylinder.
- (vii) One circlip only, push out the gudgeon pin and take off the piston. If the gudgeon pin, which is a sliding fit, is difficult to extract, remove burrs round the circlip groove. Wrap the piston in clean rag and put it in a place of safety.

The crankcase can now be separated and the flywheels taken out.

Big-End Assembly

Squirt petrol through holes in the timing-side axle with the object of removing oil from the big-end bearing so that up-and-down movement between the connecting rod and bearing can be detected. Should there be no up-and-down movement but the connecting rod can be rocked sideways (this must not be confused with side clearance between the rod and flywheel), then attention is necessary.

Separating the Flywheels

Remove both crankpin nuts; use a separating tool as shown in Fig. 6, or alternatively an Arbor press, to separate as the crankpin centre is a force fit in both flywheels. Check crankpin roller path and connecting-rod liner for wear or damage.

Flywheel Shafts

Remove the nut retaining the driving-side axle which has a right-hand thread and push out the shaft, which is usually a tight fit, from inside the flywheel.

Take out the grub screw alongside the nut retaining the timing-side axle (engines before 1954), unscrew the nut a few turns and tap the end of the shaft sharply to remove it as it is a taper fit. Take off the nut when the shaft is loose.

Engines from 1954 onwards have a parallel shaft and must be pressed out.

Main Bearings

To remove the bearings, uniformly heat the crankcase and drop it face downwards on to a bench; the bearings with spacing washers will fall out.

Cam Wheel Bushes

With a two-diameter drift drive out the cam-wheel bushes. The metal cap in the timing cover must be pressed out before the bush behind it can be removed.

Timing-Side Bush

Support the crankcase with a short length of steel tube (1½-in. outside diameter, 1¼-in. internal diameter) placed in the timing chest around the bearing bore in the crankcase, and force out the bush.

If a bush with two diameters is used, support the crankcase and force out the bush from inside the timing chest.

Tappet and Guides

The tappet and its guide can only be removed together. Some difficulty may be experienced as the guides are a very tight fit in the crankcase. Repair shops and the manufacturers use a special tool.

These guides should only be removed when the tappet feet are worn, or when the six-slot guides are to be fitted.

The valve-lifter shaft, if fitted, is removed and the two crankcase halves bolted together to prevent distortion.

Without the special tool, heat the crankcase uniformly and drive out tappet and guide from inside the timing chest.

Rocker Box

To dismantle the rocker box completely, remove both rocker-axle nuts and washers securing the valve-end rockers. Tap out each axle or prise off the rocker. The axle with its loose steel sleeve and push-rod rocker attached can be withdrawn.

The rocker-axle sleeve is mounted on two short bushes with a felt sealing ring between each bush.

Heat the rocker box and press out the four bushes.

REASSEMBLING THE ENGINE

Connecting Rod

A detachable liner is fitted to the connecting rod. Liners sold as replacements are ground internally to allow for contraction when fitted; even so complete concentricity cannot be guaranteed as contraction is controlled by the interference fit of the liner in the rod. To ensure concentricity a lapping tool is used with grinding compound.

If the big-end assembly is correct the rod should just fit over the rollers, with no appreciable side rock.

Flywheel Assembly

Fit the timing-side axle, with the oil hole in register with the hole in the flywheel. A jig can be used for ensuring accurate register. Tap the shaft home (if a taper shaft is used) to prevent it turning while the nut is tightened (do not overtighten the nut). After the nut is in position fit the grub screw.

Where the shaft has a parallel shank use a press to force it home, then firmly tighten the nut. A grub screw is not used with this arrangement.

Insert the crankpin and washer, if fitted, into the flywheel with both oil holes in register and press the crankpin home. Apply oil to the crankpin, fit the cage and fill it with $\frac{1}{4}$ -in. by $\frac{1}{4}$ -in. rollers (a total of 30). Apply more oil to the cage and rollers, fit the other washer, then take up the driving-side flywheel. Press home the shaft, ensure that the Woodruff keys (if two are fitted) do not fall out, and firmly tighten the shaft nut.

Offer up the flywheel on the crankpin and align as near as possible, with a straight edge on both rims, then press the flywheels firmly together. If this process is omitted the flywheels will flex and break the crankpin. Therefore do not rely on the nut pressure. Run down the crankpin nuts evenly to avoid disturbing the centre shaft and firmly tighten both nuts. The torque spanner setting for these nuts is 190 lb. ft.

Set the flywheels to run true with maximum error 0.001/0.002 in. Check the error between centres with a gauge on the shafts as close as possible to the flywheel face,

Crankcase

To fit a new timing-axle bush, support the crankcase and insert the chamfered end of the bush first and press home. The bush will contract when in position; ream to the dimensions given in the Appendix. The long plain bush may need adjustment to obtain the specified amount of flywheel end-float. Insufficient end-float can cause seizure.

The narrow roller bearings and short bush fitted to very early engines are now obsolete. The substitute is a two-diameter bush. The steel sleeve for the roller is retained to locate the new-type bush on the larger diameter.

Driving Side Bearings

Engines made from 1952 up to 1955 have two diameters in the bearing housing, sometimes mistaken for incorrect machining or wear. The outer bearing nearest the sprocket is a close interference fit, the inner bearing is a slight interference fit. This allows the inner bearing when in position to be tapped away from the outer bearing thus preventing end loading and permitting both inner races to rotate independently and freely.

If a bearing that is normally a close interference fit is loose in its housing, the housing can be knurled or a copper deposit 0.002 in. thick used on the outer perimeter of the bearing. The bearing must be completely shrouded, leaving only the perimeter bare, before it is immersed in the vat.

To fit the bearings, the crankcase must be heated. The assembly order with spacing washers is shown in the illustrations.

On the 1955 models one large and one smaller bearing with one spacing washer only are used. Wear on this type of spacing washer will create flywheel end-float and possible damage to the oil-pump plunger. This wear is the result of

the rubbing action of the inner race caused by the bearing jamming because of foreign matter.

The driving-side shaft can be used to locate the bearing spacing washers.


Cam Wheel Bushes

Bushes are fitted chamfered end first, flush with the housing; care should be taken to fit the bush correctly in the timing cover for the camshaft that drives the magneto. A spiral groove is machined at one end of the bush to prevent oil leaking into the magneto chaincase. This spiral groove should be on the outer end next to the magneto drive sprocket. To fit the timing cover to the crankcase use a pilot reamer through both bushes. Take off the timing covers fit both camwheels and adjust for end play with shim washers, i.e., nil end float with free rotation.

Tappets and Guides

Bolt together both crankcase halves, heat the crankcase, insert tappets in the guides, drive downwards until the guide is flush with the crankcase.

Refit valve lifter if used.

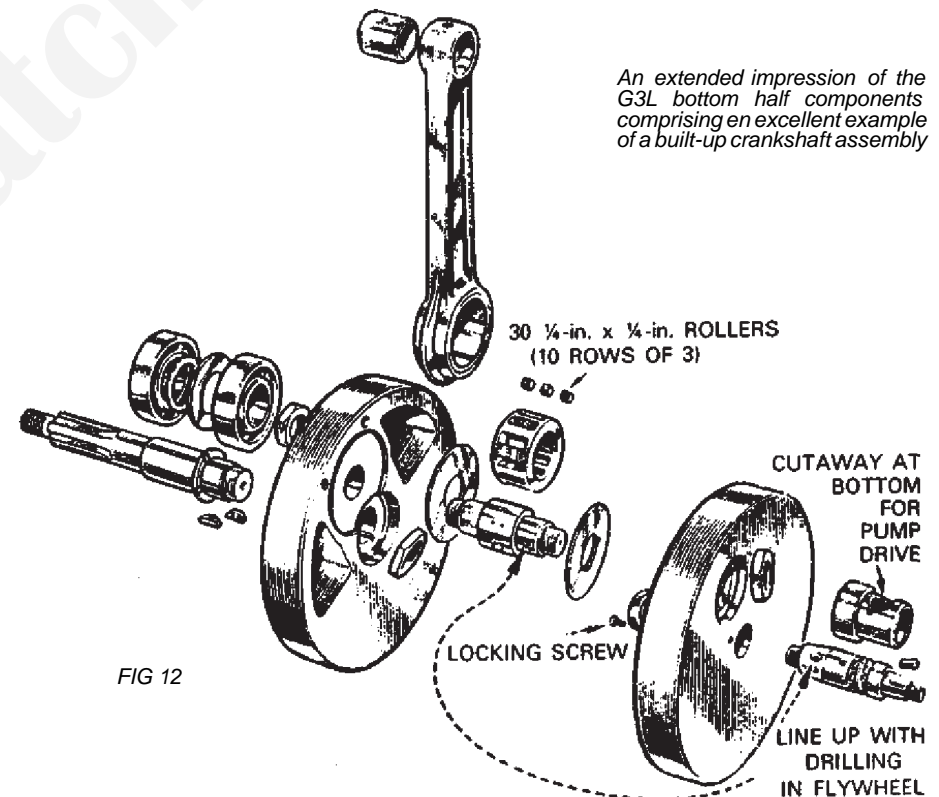

Rocker Box Assembly

If new bushes are fitted, heat the rocker box and first fit the two inside bushes, then the outside bushes, which should protrude approximately 0.010 in.

Ream the bushes to the dimensions set out in the Appendix, remove swarf and fit new felt sealing rings into the space between the inner and outer bushes.

A taper mandrel or a paint-brush handle can be used to press the rings outwards and into position, otherwise difficulty will occur in entering the rocker sleeve.

Assemble the rockers, firmly tighten the axle retaining nut and washer.

If the rocker is stiff to move, due to a lack of end play, a light tap on the outside rocker-axle nut will move the bush inwards to give free movement. When end play is excessive, take out the rocker-axle assembly and tap the inner bush outwards, to the required amount.

Assembling the Crankcase

Apply some clean oil to the bearings, bushes and tappet guides.

Fit both crankcase halves to the flywheel assembly. Bolt the crankcase together with at least four bolts, also with the bottom bolt if used.

Test the flywheels for free rotation, then check for end-float, minimum 0.020 in. to 0.025 in.

Where a long plain bush is used, it can be pressed either inwards or outwards to allow correct end play. In the case of a two-diameter bush, face back the bush as required.

The oil-pump plunger can now be fitted with care to locate correctly the guide pin.

Fit the piston, with the split in the skirt face *forwards*. Take care to ensure that the gudgeon pin circlip is correctly located.

Apply clean oil to both the piston and cylinder bore, slacken alt bolts passing through the crankcase and position the crankcase so that both halves are flush with each other when the cylinder is bolted down.

Fit the small timing pinion.

Re-install the engine by reversing the instructions given for removal.

For details on refitting the cams see the following section.

Camshafts

It is possible to modify by fitting high-lift and racing camshafts. In this case the boss surrounding the timing-side bush on earlier models has to be machined to provide clearance for the higher lift of these cams. Where machines are fitted with a valve lifter in the crankcase, the valve-lifter shaft will require adjusting otherwise the valve clearance and valve timing will be wrong. Valve movement should also be checked. Racing camshafts should not be used on machines fitted with a silencer or loss of power will result. High-lift cams (marked HL) increase the volumetric efficiency of standard models. Cams marked SH are for use with open exhaust pipe.

The valve timing of both require alteration (see Chapter 6: "Competition and Scrambles Models") and so will the carburettors if full benefit is to be derived. The manufacturers recommend carburetter bore sizes of $1\frac{3}{16}$ -in. (500 cc) $1\frac{1}{16}$ -in. (350 cc).

Compression Ratios

The compression ratio of pre-1955 models can now be raised to 7.3 (500 cc) or 7.5 (350 cc). Actually the fitting of a 1956 piston to 1952 500 cc models serves to raise the compression ratio to 7.3:1. On pre-1952 models the compression plates can be dispensed with after the ridge formed in the top of the barrel is honed out; it is absolutely essential to do this. The fitting of a new piston to the 350 cc machine (7.5:1 and no compression plate) fulfils the same object. No alteration is required to either the ignition timing or Carburation. The special piston used on scrambles machines gives a ratio of 8.3 (500 cc): 9.5 (350 cc) but these pistons are not suitable for standard models.

Plugs recommended are long reach (alloy heads): KLG FE 100: Champion NA 10: Lodge 3 HLN: KLG FE 220. Short reach (iron heads): KLG F 100: Champion L-11S: Lodge 3HN: KLG F 220. These grades provide for a higher heat factor consequent upon fast riding.

Ignition Timing

A careful check is essential and it is recommended that the manufacturer's setting should always be used. Much care is taken to determine these settings and it is extremely unlikely that better ones can be chosen. Excessive ignition advance in these days of high-octane fuel, and consequent ability to run without pinking, produces considerable stresses on the big-end assembly. The importance of correct contact-point setting (0.012 in.) cannot be over-emphasized.

To check ignition timing, set the contact-breaker points at 0.012 in. Remove the rocker-box cover and plug. Turn the engine until the inlet valve opens and then closes and, with a rod, check the position of the piston through the plug hole. Engage top gear in order that the piston can be rocked; use the rear wheel and rotate the engine shaft until the piston is at t.d.c. Mark the rod where it now registers with plug seat and then remove it and make a mark half an inch higher *up* the rod. A cigarette paper should now be inserted between the contact-breaker points; set the ignition lever to *full advance* (A.T.D. units can be fixed in that position with a small wood wedge) and again insert the rod into the plug hole. Turn the engine *back* until the half-inch mark registers with the plug-hole seat. The contact-breaker points should be just about to open at this stage, so freeing the cigarette paper. Half an inch before t.d.c. with the manual control or A.T.D. fully forward *is* the maximum recommended by the manufacturers. If it is necessary to reset ignition timing, leave the sprocket loose on the camshaft. To remove the sprocket, loosen the nut a few turns and, with the turned-in end of a tyre lever inserted behind the sprocket, lever it off. If it is difficult to remove, tap the shaft end with a mallet whilst maintaining leverage. A.T.D. unit nuts are self-extracting and will present little difficulty.

Oil Filters

Pre-1956 machines were fitted with felt filters in oil tank, giving a cleansing phase during the passage of lubricant from sump to oil tank. A strainer is fitted in the oil feed pipe to prevent extraneous matter entering the feed side. When major engine overhauls have been completed, the oil and filter need attention after a further 500 miles. Change the oil and clean the filter. Attention should be given again after 5,000 to 6,000 miles have been covered.

PRE-1955 CARBURETTORS

Erratic Running at Slow Speeds

Check the pilot jet, for this is usually responsible by being blocked or wrongly set; look for air-leaks, a distorted flange face; or the erratic running may be the result of wrong mixture. Slow-running and mixture control can be improved by opening out the hole drilled diagonally through the mixing chamber to the inlet tract (pilot outlet), using a No. 66 drill (0.033 in.) in conjunction with a watchmaker's hand chuck, or eclipse pin vice No. 121. Great care should be exercised not to use undue force. Remove burrs from the hole.

This alteration is recommended in order to obtain full control on pilot adjustment during the increase of volume of fuel fed to the engine. Pilot-screw adjustment should now be $1\frac{1}{2}$ to 2 turns open. It is essential that positive slow-running is obtained by adjusting the pilot air-control screw before the engine becomes unduly hot. If this adjustment is made with the engine unduly hot, the final setting will be weak. It has been established that positive slow-running is best obtained with the plug gap set at .020/.022 in.

Petrol Consumption

When checking with a view to improving m.p.g. figures ensure that the carburettor is not faulty by reason of ovality in the needle-jet aperture, also that the float is not faulty. Fit a new needle jet and float if in doubt and see that the engine is in good general condition.

Throttle Slide


The degree of cutaway is determined by the manufacturers. The slide, as fitted to the standard models, is usually adequate but, if it is intended to alter this, an understanding of the principles involved is desirable.

Slides are marked on the head, the first figure indicating the type, and the second the amount of cutaway in sixteenths of an Inch. The mark 29/4, for instance, shows that the amount of cutaway is $\frac{1}{4}$ -in. Using a larger cutaway weakens the mixture; a smaller cutaway enriches. To remedy a weak or flat spot after leaving the pilot phase, use a smaller slide cutaway. This increases petrol consumption, so before changing a slide check that the pilot setting is not weak and thus the cause of the trouble. A surging effect will be noticed at 30-40 m.p.h. if the cutaway is too shallow.

Fuel Consumption

A few hints on this topic may assist the tyro rider. No gain in fuel consumption will be achieved by reducing the main jet size (if the recommended jet is already fitted) except after the throttle is more than three-quarters open. Needle position affects fuel consumption and engine performance only at about 50 m.p.h. or more. But raising the needle improves acceleration. The answer to high fuel consumption is to keep the throttle turned well down.

FIG 13

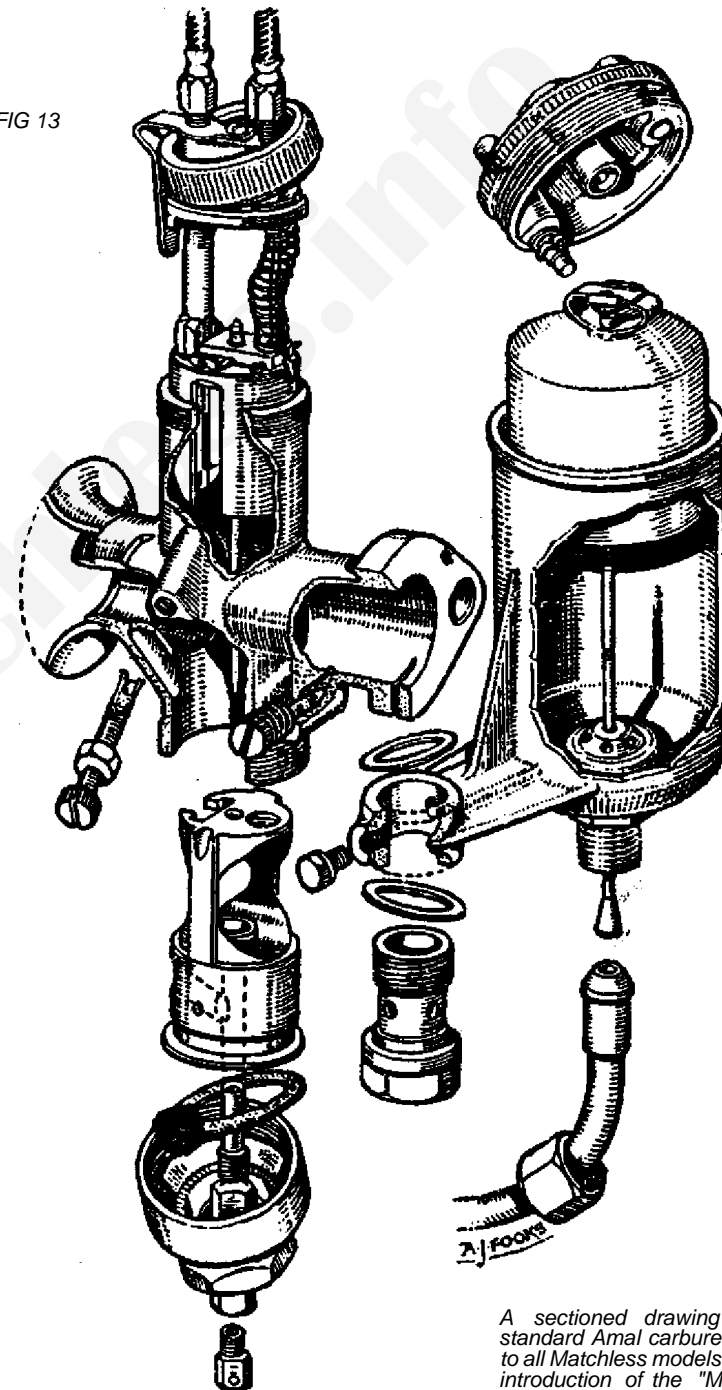

A sectioned drawing of the standard Amal carburettor fitted to all Matchless models up to the introduction of the "Monobloc"

Silencer Noises

An uneven or explosive exhaust noise is usually due to the effect of a weak pilot setting, revealed when the throttle is nearly closed or closed. If the exhaust pipe is loose in the exhaust port this, also, will cause silencer noise. Check the throttle slide for wear. This has the effect of admitting air additional to requirements, producing a weak mixture. To remedy the loose exhaust pipe, swell out the end with a taper cylindrical wedge.

THE "MONOBLOC" CARBURETTER (1955)

This instrument introduces many new features, among them a removable pilot jet and a combined fuel and mixing chamber. The primary air choke has a compensating action in combination with two bleed holes in the needle jet which serve the purposes of air-compensating the mixture from the needle jet and providing a reserve of fuel for sharp acceleration. Tuning routine is very similar to that for the old-type carburetter and presents little difficulty.

To Remove the Float

Take off the side-cover fixing screws; raise the float off the hinge pins and check for punctures. When re-fitting see that the narrow hinge leg is uppermost.

To Remove the Float Needle

Remove the banjo bolt, washer and filter gauze; unscrew the needle seating and lift out the needle; check the pointed end and seating. Care should be exercised when handling the needle and gauze.

To Remove the Pilot Jet

Remove the pilot-jet cover nut and washer and unscrew the jet with a screwdriver. Ensure that the pilot by-pass and the pilot outlet are clear. On assembly see also that the pilot jet is not over-tightened, for a damaged pilot-jet seating cannot be rectified.

To Remove the Jet Block


Take out the air and throttle slides, the jet holder, complete with needle jet and main jet, and unscrew fully the throttle-slide adjuster. Lift out the jet block from the mixing chamber, watching that the gasket at the base is undamaged, otherwise fuel will leak across the face, resulting in heavy consumption and a rich mixture. When replacing the slide, carefully locate the taper needle in the jet block.

Adjustments

The following sequence should be observed;

First check the rocker adjustment, plug gap and contact-breaker points. Screw home fully the pilot air-adjusting screw, then unscrew it 1½ turns. For engines

(Below) The "Monobloc" body showing removed the slide stop, slow-running screw and pilot jet

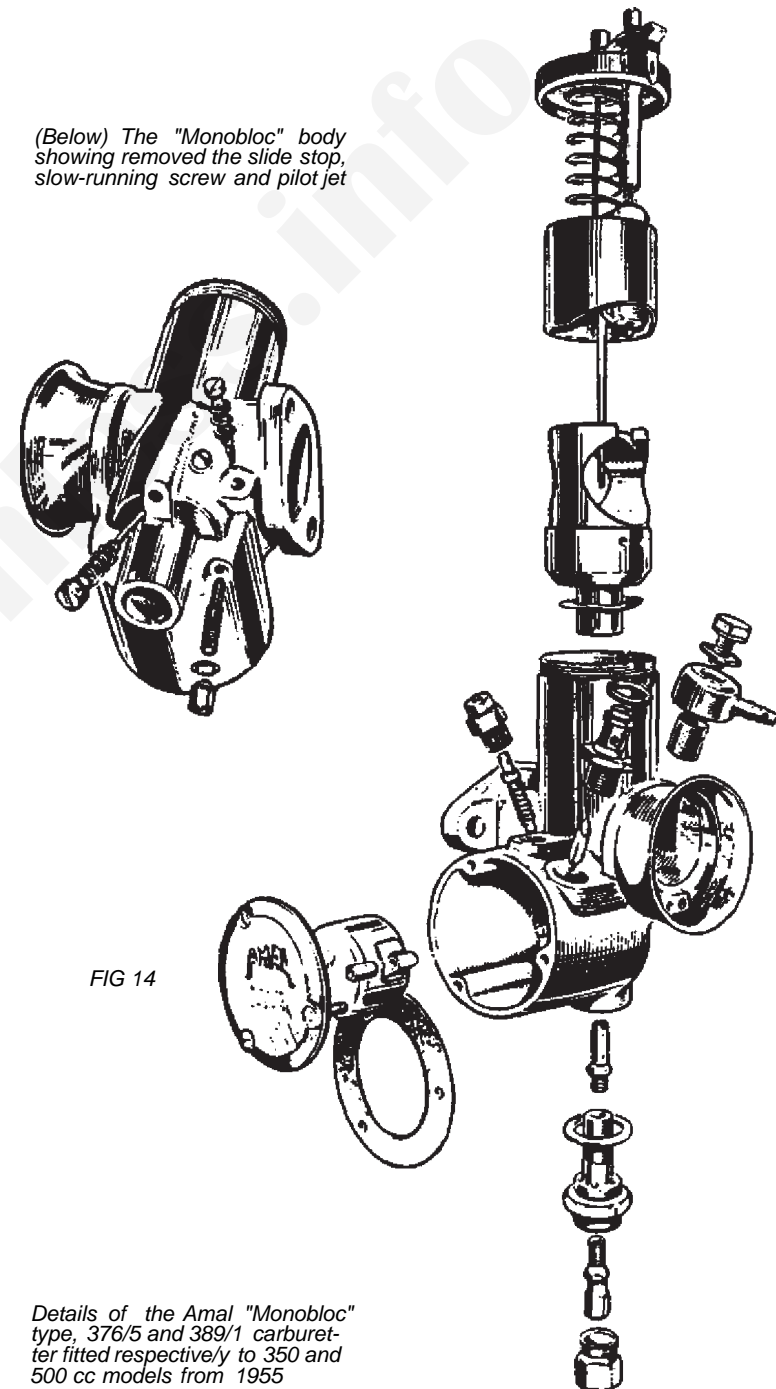

Details of the Amal "Monobloc" type, 376/5 and 389/1 carburetter fitted respectively to 350 and 500 cc models from 1955

fitted with manual ignition control, retard the lever $\frac{1}{8}$ in. Now warm-up the engine with the air lever fully open and set the throttle-adjusting screws so that the engine runs just too fast for idling or slow-running speeds with the twist-grip closed. Then gently unscrew the throttle-adjusting screw to reduce the engine speed until the engine falters. Finally screw in or out the pilot adjuster until the engine runs evenly and slowly. If engine speeds increase rapidly, the setting is too weak. Recheck. Open and close the throttle sharply and check for any falter. The engine must not be allowed to become too hot during this work, so complete the slow-running setting first and as quickly as possible.

Petrol Consumption

Fuel wastage can be caused by incorrect setting of the pilot jet and consequent flooding. Fit a new nylon needle and check the washer at the base of the jet block. On old machines fit a new needle and needle jet but do not alter the jet size.

Pre-1956 350 cc machines can be adapted to use a larger cutaway slide (size $3\frac{1}{2}$) which should show a petrol consumption improvement of up to 13 m.p.g. at 40 m.p.h.

When fitting a new jet block, ensure that the holes in the mixing chamber register with those in the primary choke. If necessary, the taper needle can be lowered one notch but it should be borne in mind that this reduces the acceleration rate.

4. GEARBOXES

THE CP-TYPE BURMAN GEARBOX

This gearbox is fitted to W.D. models and 1945-51 machines. Pre-1948 boxes were grease lubricated; 1948-51 were lubricated by S.A.E. 50 oil (capacity 1 pt). Hypoid 80 or 90 has also been satisfactorily used consequent on improved types available in the 1960's.

Gear Selection


If engagement is uncertain, check the rocking-pawl mechanism for wear or for a broken spring in the spring box. Ascertain that the assembly is correct by taking out the footchange assembly. The small pinion on the camshaft is marked with an "O"; turn the shaft until the "O" is at nine o'clock and remove the foot-change mechanism. The toothed sector engages with the camshaft pinion, also marked "O". With both marks in register the gears are indexed correctly. If difficulty continues, worn striker forks are likely to be the cause of the trouble.

Top Gear

If top gear disengages under load, the striker forks are probably worn, or possibly the main driving-gear bush has moved towards the kickstarter side of the gearbox, preventing full engagement of the gear. Fit a new bush.

Small clearance in the split push-rod and ball assembly is essential

FIG 15

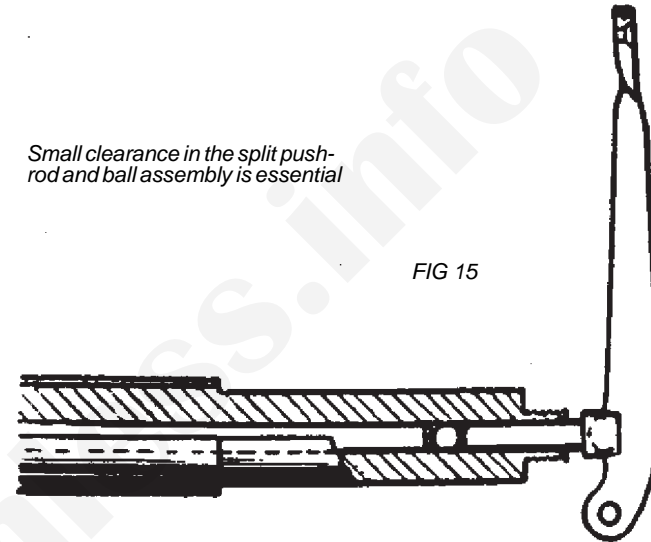

Gearbox Noises


If the transmission is noisy in third gear, look for wear on the layshaft fixed pinion and/or main driving gear, which engages with the layshaft fixed pinion. Also check the layshaft bush.

Noisy gear engagement when the machine is moving off is due to clutch drag. Holding the clutch lever tight against the handlebar depress the kickstarter lever. If, after this, the gear engages without noise, clutch drag is confirmed. Check for clearance ($\frac{1}{32}$ -in.) between the operating plunger and the nose on the operating lever by testing the top end of the clutch withdrawal lever. It should move about $\frac{3}{32}$ -in. to and fro.

Check for sticky friction plates, caused by oil residue, and, if necessary, clean with paraffin. At the same time, check for buckles in the plain plates. Check that the pressure plate is running true. Pull out the clutch lever, depress the kickstarter

FIG 16

Clutch-operating lever with ball-thrust mechanism and component parts, including adjuster pad, on the Burman CP-type gearbox

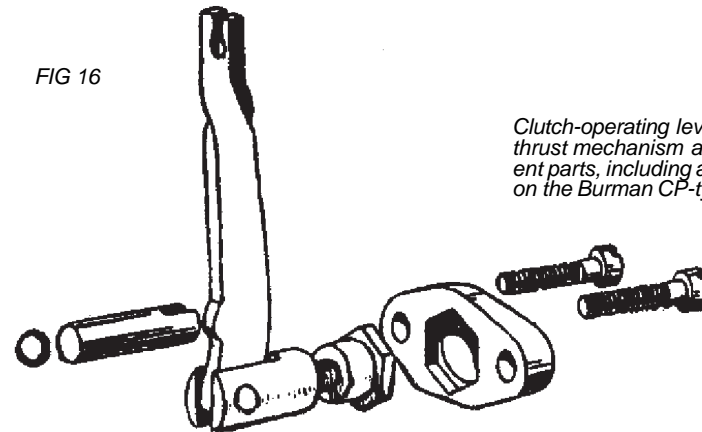

and watch for plates rotating out of true. To cure, balance the clutch springs equally. Check that there is sufficient clutch-plate separation; it is sometimes lacking, due to wear in the operating mechanism.

Clutch Fails to Disengage

Check the nut retaining the kickstarter ratchet pinion, the thrust stud in the clutch pressure-plate and the clutch-hub retaining nut. The push-rod and operating lever should be checked if trouble has developed gradually.

Kickstarter Faults

If the kickstarter fails to engage, or sticks up, it is usually due to damage of the first tooth on the quadrant; this can be ground off with little loss in leverage. The trouble is often due to the absence of a stop rubber. If the kickstarter fails to return to the neutral position, check for a broken spring and for seizure on the shaft

Gearbox Mainshaft End-Play

Assuming the kickstarter pinion nut is tight, check the small bearing of the mainshaft in the kickstarter case. Shim washers placed between the bearing and the housing may provide a remedy if wear is not too advanced.

Clutch Rattle

Sometimes experienced when the engine is idling. It is due to backlash between the tongues on the clutch friction plates and the slots on the clutch driver. If the clutch is pulled in and the noise disappears, that is the trouble. Renew clutch driver if wear is considerable.

Clutch Sprocket Movement

This is usually due to wear on the clutch hub rollers and/or sleeve. If the bearing surfaces are correct, the width of the mainshaft bearing sleeve can be reduced and new rollers fitted.

Broken Pinion Teeth

In order that further trouble may be avoided after fitting new gears it is essential that both the mainshaft and the layshaft should be checked for straightness before reassembling. If there is a bow, and its slight, the shaft can be straightened between V blocks.

It may be of interest to readers to study the working of a gearbox, usually taken for granted by the majority of riders.

The illustration is of the CP-type Burman gearbox, which has four forward gears and has positive-stop foot gear-change mechanism. The component is clamped between the two rear engine plates by two bolts, the bottom bolt acting as a pivot. The top bolt passes through the gearbox top lug and the rear plates, which are slotted; this allows the gearbox to be moved to adjust the primary chain.

Power Transmission through the Gears

First (lowest) Gear

Sliding gear, Fig. 17, "C" on the mainshaft is in the midway position, that is, disengaged from gear "B" and "D". The layshaft sliding on clutch "W" moves to the right and engages with gear "G". Power now is transmitted through clutch "A" to mainshaft "T", mainshaft sliding gear "C", layshaft gear "G", layshaft "W", layshaft "V", layshaft gear "E", to main gear "B" and chain sprocket "J".

Second Gear

Sliding gear "C" on the mainshaft is in the midway position, that is, disengaged from gears "B" and "D". Layshaft sliding clutch "W" moves to the left and engages with gear "F". Transmission is by way of clutch "A", to mainshaft "T", mainshaft sliding gear "C", layshaft gear "F", layshaft clutch "W", layshaft "V", layshaft gear "E", and main gear "B" to chain sprocket "J".

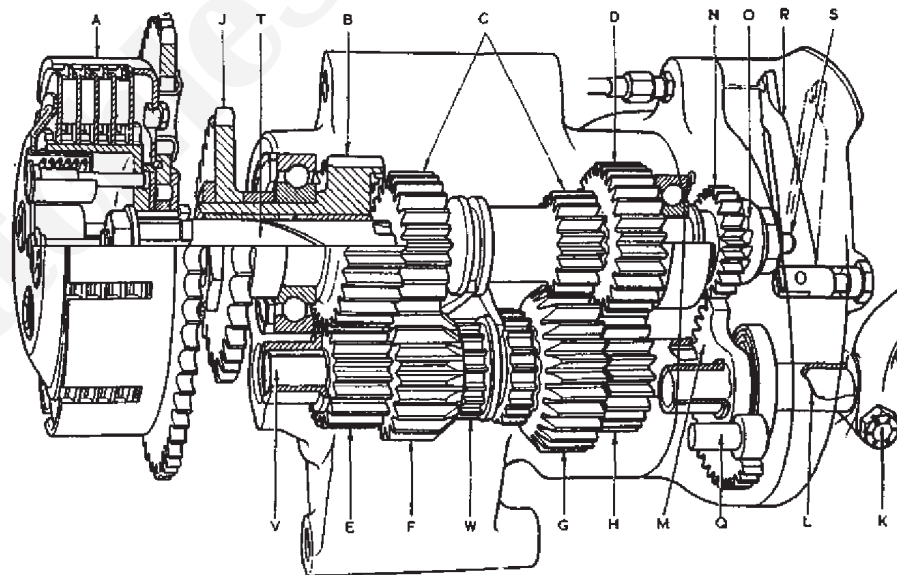


FIG 17 The CP-type Burman gearbox-clutch assembly

Third Gear

Sliding clutch "W" on the layshaft is in the midway position, that is, disengaged from gears "F" and "G". Mainshaft sliding gear "C" moves to the right and engages with gear "D". The transmission is through clutch "A", to mainshaft "T", to mainshaft sliding gear "C", mainshaft gear "D", layshaft gear "H", layshaft "V", layshaft gear "E" and main gear "B" to chain sprocket "J".

Fourth (highest) Gear

Sliding clutch "W" on the layshaft is in the midway position, that is, disengaged from gears "F" and "G". Mainshaft sliding gear "C", moves to the left and engages with main gear "B". Power is controlled by clutch "A", mainshaft "T", mainshaft sliding gear "C" and main gear "B" to chain sprocket "J".

THE B52 BURMAN GEARBOX

This gearbox is fitted to 1952-55 machines. Oil capacity, 1 pt S.A.E. 50 grade. Hypoid 80 or 90 may also be used.

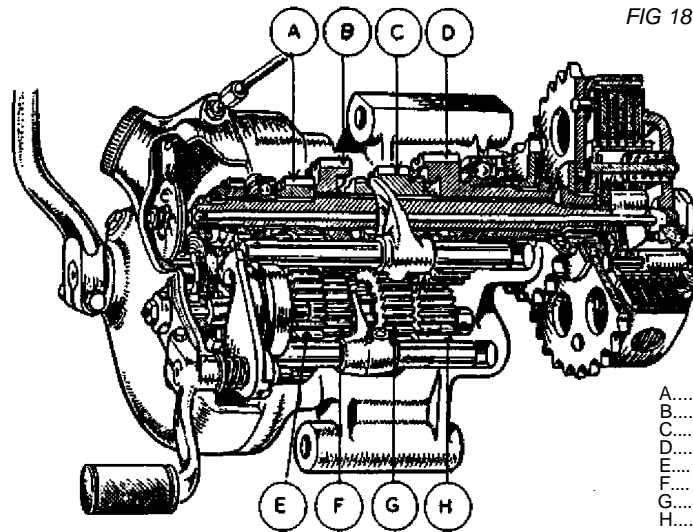


FIG 18 Section through the Burman B52 gearbox showing gears and clutch with actuating mechanism

- A....Low gear on mainshaft.
- B....Third gear on mainshaft.
- C....Second gear on mainshaft.
- D....Main driving gear.
- E....Low gear on layshaft.
- F....Third gear on layshaft.
- G....Second gear on layshaft.
- H....Small pinion on layshaft.

Gear Selection

Faulty selection is almost certain to be due to the small cam-barrel plunger sticking in its housing. Rub down the plunger with an abrasive and apply oil.

Top Gear

If top gear disengages under load (early 1952 models), the probable fault is that the main-bearing housing is machined too deeply and so causing partial engagement between the main driving gear and the mainshaft sliding gear. Make a steel washer, $\frac{1}{16}$ -in. thick, and place it between the main bearing and the housing.

Gear Disengagement

Disengagement under load is probably due to the weakness of the V-shaped footchange centralizing spring in the kickstarter case, or to a weak footchange quadrant coil spring. Stretching the spring will cure. Check the cam-barrel plunger for free movement in its housing.

Footchange Lever

It is sometimes found that the lever sticks. Check for friction between the footchange shaft and bearing in the kickstarter case cover. Lay the machine over on its left side and free by using penetrating oil or paraffin; failing this, dismantle and rub down the shaft with an abrasive. Oil before reassembling. A weak centralizing spring is betrayed by the same symptoms.

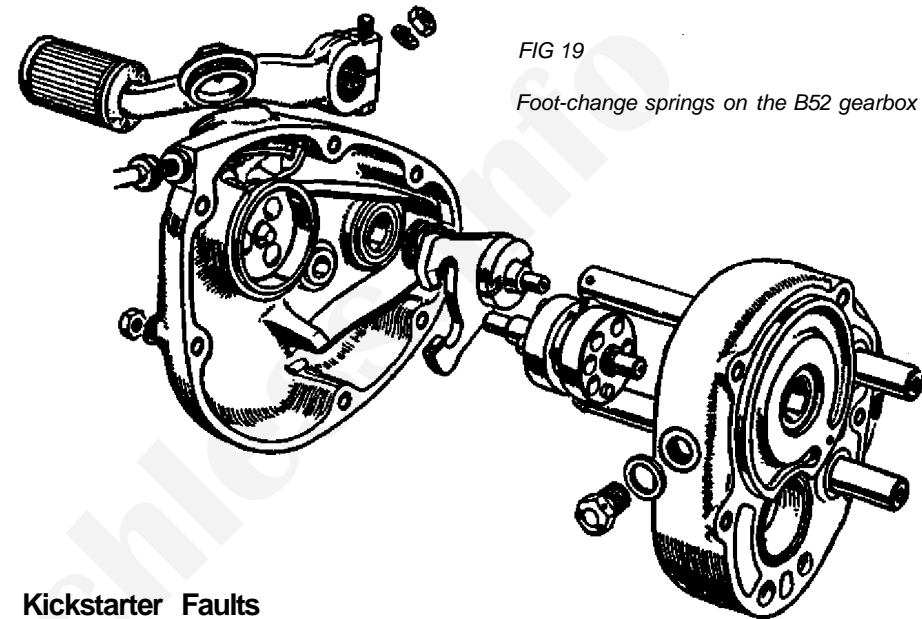


FIG 19

Foot-change springs on the B52 gearbox

Kickstarter Faults

If the crank sticks, ease the cover screws and then depress the lever. The spring is probably broken if the crank does not return to its position. If the crank returns, the loosened state of the screws may show that normally the kickstarter axle bearings in the case and cover are out of line. Ensure that the kickstarter axle is perfectly clean. Do not use the machine with the kickstarter left in an incorrect position.

Oil Leakage

Leakage can occur from the two metal caps that seal the shaft holes, or from the main-bearing oil seal. Leakage from the kickstarter cover case is due to a broken or defective gasket fitted between the case and the cover. To stop an oil leak from the two metal caps wash the parts with petrol; use jointing compound in both apertures and allow to set. Try this first before replacing the oil seal.

5. THE CLUTCH

Clutch Spring Adjustment

Check that the clutch-spring studs are not bent. Insert the spring cups, then the springs. Fit the nuts, leaving them slack. Ensure that the pressure plate is in the correct position; tighten the nuts diagonally (top left, bottom right, and so on). When all nuts are fully tightened, unscrew each four turns. If a slot is cut in the end of a screwdriver, sufficient to clear stud bolts, this modified tool will facilitate fitting.

Clutch Adjustment: CP Type Burman Gearboxes

A small adjustment can be made by screwing in or out the clutch-cable adjusting screw located on the gearbox, leaving free movement at the clutch lever end of between $\frac{1}{8}$ -in. to $\frac{3}{16}$ -in. If this adjustment is insufficient it will be necessary to alter the position of the operating-lever fulcrum pin, located within the kickstarter case, by adjusting the sleeve nut. The effective length of the clutch push-rod is then too long and can be compensated by means of the sleeve nut. There should be $\frac{1}{32}$ -in. free movement between the operating lever and the operating plunger. To increase the clearance turn clockwise; to decrease, turn anti-clockwise (usually about half to one turn). Check the movement of the operating lever by inserting a finger in the gearbox filler hole. Remember that a well-lubricated clutch cable is essential to smooth working.

Clutch Adjustment: B52-Type Burman Gearboxes

The clutch will not disengage if adjustment is incorrect. Reset the operating mechanism by slackening the cable adjuster as far as it will go. Next, release the nut in the centre of the pressure plate (use a spark-plug spanner); screw in the clutch thrust-stud until light contact with the push-rod is felt. Then unscrew the thrust stud half a turn. Again tighten the nut, noting that the thrust stud must not move. The clutch cable can now be adjusted until there is $\frac{1}{8}$ -in. to $\frac{3}{16}$ -in. movement in the outer casing and the adjuster.

Clutch Cables

To remove the clutch cable, first take off the oil-filler cap on the gearbox; screw the clutch-cable adjuster fully home and, with a suitable lever, press in the operating lever and release the clutch cable. Withdraw the clutch-cable adjuster from the gearbox and remove the cable from the handlebar lever.

When refitting the clutch cable see that sharp bends are avoided.

Clutch Slip

There are many causes. Friction inserts rendered ineffective by oil is the chief offender. In this case, wash them in petrol and apply fuller's earth, or fit one of the types of oil-resisting inserts recently marketed. Clutch springs are usually weakened by heat generated through persistent clutch slip so check for a free length of $1\frac{25}{32}$ -in. Clearance between the clutch-actuating lever and plunger should be $\frac{1}{32}$ -in. Free movement at the handlebar clutch lever should be $\frac{1}{8}$ -in. to $\frac{3}{16}$ -in. Check that the top of the operating lever in the kickstarter case is not in contact with the oil-filler plug. The clutch hub-nut on the mainshaft of CP-type gearboxes sometimes fouls on the spring cups; change for a smaller-sized nut (B52 type).

Complete Clutch Removal

Remove the chaincase, the clutch screws, springs and cups, and pressure plate. Turn back the clutch hub-nut lock-washer. Now engage top gear, depress the rear brake pedal as a locking device and unscrew the hub nut. Remove the front chain. Ease off the clutch assembly, taking care not to lose the 24 clutch rollers which will now fall out.

Reverse the procedure to reassemble; grease the roller bearings when assembling.

6. COMPETITION AND SCRAMBLES MODELS

Trials

In order to obtain good results, i.e., dead-slow running with plenty of power at slow speeds, use a low compression ratio: 5.8 (500 cc) : 6.3 (350 cc) with standard cams (1949-53 type) and correct pilot adjustment. If necessary, fit a throttle slide with $\frac{1}{16}$ -in. less cutaway and eliminate air leaks. Use heavier flywheels and a manually-operated ignition lever. Flywheels are identical on both 350 cc and 500 cc machines, with the exception of the balance factor, but if the machine is a standard competition model no alteration is necessary.

Gear Ratios

An ultra-low bottom gear is necessary; fit an engine sprocket with 18 teeth (500 cc) : 16 teeth (350 cc). This will do for normal events (see Gearbox Ratios in the Appendix).

Chaincase Sealing

Pre-1952 model owners should use a rear-half primary chaincase with a mud excluder fitted at the mainshaft hole. Use a felt sealing-washer between the back of the engine sprocket and the crankcase, and fit a length of rubber tubing from the crankcase release-valve orifice.

Conversions

A great deal of thought should be devoted to converting standard models for trials. Some of the essentials follow: mudguard clearance must be ample, and the front guard presents no difficulty in this respect, but the rear mudguard bridge piece must be raised. Preferably, competition-type guards should be fitted. The main driving gear and layshaft fixed pinion must be changed to provide the ultra-low ratios needed for competition work. Competition ratios for the CP box are obtained with 32 teeth for the main gear and 18 for the meshing layshaft pinion. For the B52 box, sizes are 30 and 17 respectively. Change the engine sprocket.

Converted machines may not handle so well as standard competition models because of the difference in the frame head-lug angle which determines trail or castor action. The fitting of a 21-in. front wheel helps to offset this difference.

General Tips

Waterproof the H.T. brush holder; seal the contact-breaker cover, but not the vent hole (use Plasticine); fit spare clutch and throttle cables.

Scrambles Models

Maximum engine efficiency is called for and this can only be achieved by attention to every detail. Polish the sphere of the head and the ports; use a compression ratio of 8.3:1 (500 cc); 9.5:1 (350 cc) and fit special cams, marked

SH. Use an open exhaust-pipe system (pre-1956, 48 in. long) and fit a "Monobloc" or "T.T."-type carburetter, preferably the former. With compression ratios as above, run on premium grade fuels. If higher compression ratios are chosen (11 : 1 to 13 : 1), methanol-benzole mixture must be used.

Plugs

Fit plugs with a high heat factor, such as FE 220 or 250 (long reach, for light-alloy heads): F 220 or 250 (short reach, for iron heads). If a long-reach plug is used in a short-reach head it will cause damage. A short-reach plug used in a long-reach head will have the effect of retarding the ignition. Plug points should be flush with the sphere of the head to obtain the best results. If the standard plug washer is too deep, use a solid-copper washer cut to width,

Connecting Rods

If there is marking on the top end of one side and the bottom end of the other side of the piston, the connecting rod needs aligning. It is possible to check the con-rod without removing it by employing a steel block and mandrel.

Flywheels

Light flywheels improve acceleration. Engines made before No. 8,000 had flywheels which were 2.5 lb. lighter than at present. Flywheel balance will not be affected if the periphery (not side) is reduced by $\frac{1}{8}$ in.

It is sometimes found that the flywheels move on the crankpin, especially in old models, due mainly to exceptional stresses and strains of scrambling. The interference fit of the crankpin shaft should therefore be checked. A copper deposit 0.002 to 0.003 in. on both shanks of the crankpin will produce new interference-fit dimensions. When crankpin washers are used fit steel in preference to bronze.

Short-Circuit Racing

As with scrambles models, machine preparation for racing is all-important and no detail should be ignored. All-round tightness of nuts, bolts, guards, cables, etc., wheels correctly balanced, correct Carburation, correct plugs and a very high standard of engine efficiency are essential.

Gear ratios must be altered to suit the purpose. On touring machines silencers can be removed, subject to increasing the main-jet size to 190 or 200 (500 cc) and to 160 or 170 (350 cc). "Monobloc" increases are to 280 (500 cc); 220 (350 cc). Plugs recommended are KLG FE 220 or 250 (long reach): KLG F 220 or 250 (short reach).

Valve Timing

All timing pinions and cams are marked and little difficulty should be experienced in refitting. Cam markings are as follows:

1937-48. Cams marked with a dot. Timing pinion with a line on the outside face midway in the keyway slot (see Figs. 19 and 20).

1949-51. Cams 1 and 2. One is Matchless; two is AJS (see Fig. 21).

1952-53. Cams marked 1 and 2 (see Fig. 21). Two is used on both Matchless and AJS.

1954-55. High-lift cams (HL), Cams marked 1,2 and 3 (see Fig. 22). For 350 cc models use No. 3 for inlet; No. 2 for exhaust. For 500 cc models use No. 2 for both valves. When fitting camshafts that have neither a slot nor keyway for the long shaft, use a No. 1 marking for the exhaust cam.

Many owners experiment with the valve timing, only to revert to the original. It is a waste of time, for each tooth represents 20 degrees of the engine rotation, so that any slight change results in completely different timing.

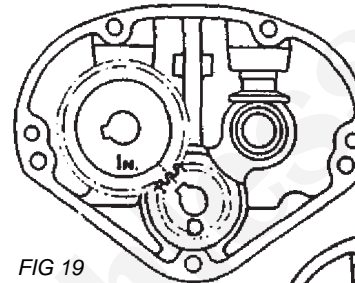


FIG 19

Meshing the timing pinion and inlet valve gear

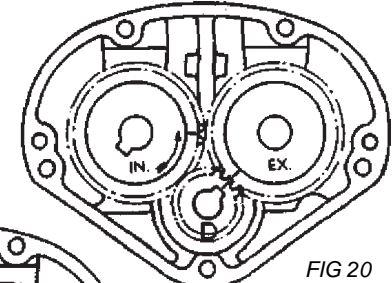


FIG 20

Second operation in meshing the timing pinion and exhaust valve gear

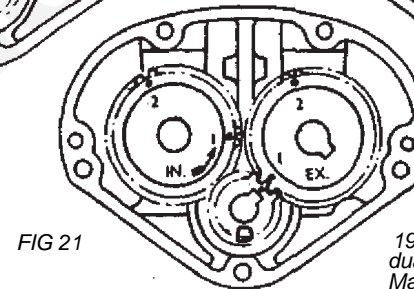


FIG 21

1943-51 timing arrangement, dual marked to suit either AJS or Matchless engines

The method of cam marking has been altered since 1945. The year of manufacture and type of marking used are as follows:-

1945-48—Cams are marked with a dot. The pinion has a line on the outside face midway in the keyway slot.

1949-51 —Cams are marked *one* and *two* for use on both Matchless and AJS engines. Number *one* marks are for Matchless engines, number *two* for AJS.

1952-53 (Valve Lift 0.326 in.)-Marking similar to 1950-51 models, with the exception of assembling, when number *two* marks are used for *both* Matchless and AJS models inlet and exhaust. (Both models have magneto in front of cylinder at this date.)

1954-55 (Valve Lift 0.362 in.)-Cams are of the high-lift type (marked HL). Additional figure number *three* is used for setting Inlet timing on the 350-cc model *only*. Use number *two* marks for the 350-cc exhaust and for both valves of the 500-cc model.

1956-58 (Valve Lift 0.362 in.)-Number *three* used for the 350-cc inlet, number *two* for the 500-cc inlet and number *one* for the 350-cc and 500-cc exhaust

Note—The latest type camshafts do not use a keyed shaft to drive the magneto. If a keyway is not visible in the cam wheel use No.1 mark for the exhaust-cam setting, before 1956-57.

Fitting Cams

The drill is the same for all models:

- (1) Turn the engine until the mark on the pinion is at about 10 o'clock (inlet cam). Insert the cam with its mark to register with the mark on the pinion.
- (2) Turn the engine *forward* until the mark on the pinion is at about 2 o'clock (exhaust cam). Insert cam also with the mark in mesh with the mark on the pinion.

Lubricate all parts before replacing the timing cover.

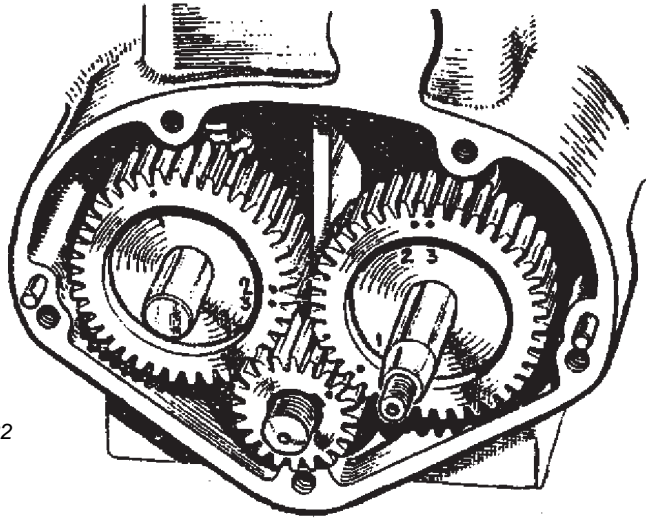


FIG 22

1954-55 High-lift cams are signified by the 1, 2, 3 marking

7 TRANSMISSION

Front Chain Adjustment

To adjust the front chain, first remove the inspection cap. Follow this by:

- (i) Slackening the nut on the gearbox top fixing bolt.
- (ii) Slackening the *forward* nut on the chain adjuster about three turns.
- (iii) Tightening slowly the *rear* nut on the chain adjuster until the chain is tight.
- (iv) Slackening by about three turns the rear nut on the chain adjuster.
- (v) Tightening slowly the forward adjusting nut to give a $\frac{3}{8}$ in. chain whip at the tightest point of the chain run.
- (vi) Tighten the rear nut to lock the assembly.
- (vii) Tighten the gearbox top fixing bolt and replace the inspection cap.

Afore; Altering the position of the gearbox will affect rear chain adjustment.

Rear Chain Adjustment: Spring Frame

Spring-frame Models 1950-54

The rear-wheel spindle carries two cams which, when rotated, alter the position of the spindle in the fork-ends. The cams abut against projections in the fork-ends and the right-hand one with a lock nut is adjustable and is pre-set on initial assembly. The position of this projection should not be altered unless wheel alignment is incorrect.

To adjust the rear chain with the machine on a centre stand, slacken the nut securing the speedometer gearbox and the left side wheel nut. Continue by:

- (i) Moving the wheel forward so that the two cams on the axle contact the projections.
- (ii) Apply an adjustable spanner to the hexagonal body on the wheel axle, keeping the wheel pressed forward, and turn until chain whip is $1 \frac{1}{8}$ in. when tested midway between sprocket centres.
- (iii) Tighten the wheel axle nut, turn the wheel and check the chain tension in several positions; correct whip is that at the tightest place in the chain travel.
- (iv) Tighten the nut securing the speedometer gearbox, positioning the drive cable before finally tightening.
- (v) Check brake adjustment.

Rear Chain Adjustment: Rigid Frame

Rigid-frame Mode/s (Machine on Rear Stand)

Slacken both axle nuts slightly and the lock-nut on the adjuster bolts-

To adjust the chain

- (i) Screw-in equally the two adjuster bolts until chain whip is $\frac{3}{8}$ in. to $\frac{1}{2}$ in. in the tightest place. Check the chain at more than one point.
- (ii) Tighten the axle nuts.
- (iii) Tighten the adjuster locknuts.

Q-D Wheel Models

Follow details given for rigid-frame models but also slacken the nut securing the brake drum to the fork-end as well as both the axle nuts.

Chain Lubrication

The most effective method, particularly during winter, is to remove the chain and wash it in paraffin. A small quantity of "Mobilgrease No. 2", "Esso" fluid grease, "Castrolase" graphited grease, or "Energrelase A.O." should be used as a bath. Put the grease in a tin and heat it until just fluid; immerse the chain and reheat grease (the chain will cool the grease), leaving the chain to soak; then wipe off surplus and refit.

8. FORKS AND FRAMES

Teledraulic Front Forks 1945 to 1955

Other than periodically checking the oil content, this part of the machine does not need frequent attention.

If the fork motion becomes stiff, and provided that the fork sliders or main tubes are not bent by impact, the trouble is due to swelling of the plastic bushes.

To remedy, remove the sliders and take off the plastic bushes. With emery cloth ease down the bore of the bush until it is a sliding fit. Apply oil or a little graphite compound and reassemble.

A scraping noise as the forks move is caused by the springs rubbing against the cover tubes. Grease applied to each fork spring will have the desired effect. A rattle in the forks may be due to a disconnected damper rod or insufficient oil content.

To Remove the Fork Assembly

Before dismantling, a study of the construction should be made. Remove:

- (i) The wheel, front mudguard and stand.
- (ii) The speedometer drive, the bulb holder and the speedometer head.
- (iii) The switch panel from the headlamp and the headlamp.
- (iv) The handlebars, with fittings; detach brake cable from forks. (Put an old coat on the petrol tank to prevent damage by the handlebars.)
- (v) The two bolts in the handlebar lug for the fork tube and disconnect both damper rods, if fitted.
- (vi) The dome and lock nut from the steering column.
- (vii) Tap the handlebar lug upwards until it is free of the fork stem. Take out the top frame race, the 28 balls from the bearing and then withdraw the assembly. A further 28 balls are used in the bottom frame race.

Assembly

Pack the fork crown race with grease and fill with the 28 balls, pass the steering column through the frame and reverse the dismantling procedure.

Fork Sliders

"Teledraulic" fork sliders comprise the light-alloy moving members of the fork assembly, carrying the front-wheel spindle, mudguard, brake anchorage and, most important, housing the damper mechanism. Modifications have been made to the detail working of this mechanism over the years since "Teledraulics" were first introduced early in the war, but the fundamental principle has remained. "Teledraulic" operation depends on the action of disc-type damper valves with limited permitted movement, or orifice cut-aways, designed to obstruct progressively the transfer of hydraulic fluid from one compartment to another during the movement of the slider under running conditions and, thereby, to damp, or slow down, slider movement at both the impact and rebound phases.

To remove one or both sliders raise the front wheel clear of the ground. With a

hook spanner first unscrew the slider extension and follow this by:

- (i) Removing the front wheel mudguard and stand.
- (ii) Detaching the brake cable.
- (iii) Unscrewing the bolts in the handlebar lug.
- (iv) Detaching the damper rods, if fitted.
- (v) With a sharp downward movement withdrawing the slider (warming the enlarged top end of the slider will facilitate removal).

To remove the damper rod and tube a thin-wall box key, fashioned to enter the recess in the bottom of the slider, is required.

To Refit

With the damper rod and tube assembled in the slider, operations are:

- (i) Pass the damper rod up the fork tube and raise the slider until it meets the oil seal.
- (ii) Warm the enlarged end of the slider and press in the oil seal sufficiently to allow engagement of the screwed extension.
- (iii) Reassemble in the reverse order for dismantling and finally tighten the screwed extension when the wheel is refitted. A length of copper wire, or an old push-rod screwed on to rod, can be used to lift up the damper rods for attachment.

To Remove Fork Inner Tubes

Both fork tubes can be removed with the sliders attached, but a draw-bolt to pull up the tubes will be required.

Without this tool, first remove the fork sliders as previously described. Release the two screws or bolts clamping the fork tubes from the fork crown and pull out the tubes from the fork crown and handlebar lug.

Rear Suspension

The swinging-arm is hinged behind the gearbox on two robust self-lubricating bronze bushes. There is a reservoir for oil incorporated in the swinging-arm.

To lubricate, remove the screw in the right-hand cap and use a heavy gear oil; normal content 1 ½ fluid ounces. (67 ml.)

Wear on the bushes is only likely to take place after the machine has covered considerable mileage.

Rear Suspension Units

The normal oil content is 3 fluid ounces (85 cc) S.A.E. 20 oil.

To change the oil, deal with one unit at a time and remove it from the frame. A clamp to grip and encircle the outer tube is needed and is applied close to the bottom pivot lug.

With the clamp gripped in a vice, slacken the bottom pivot lug. Turn the unit upside down and remove the bottom pivot lug.

Take hold of the exposed damper tube and work it up and down, then pour the oil content into a graduated measure, and allow the unit to drain. Pour back the specified amount of oil and reassemble in the reverse order.

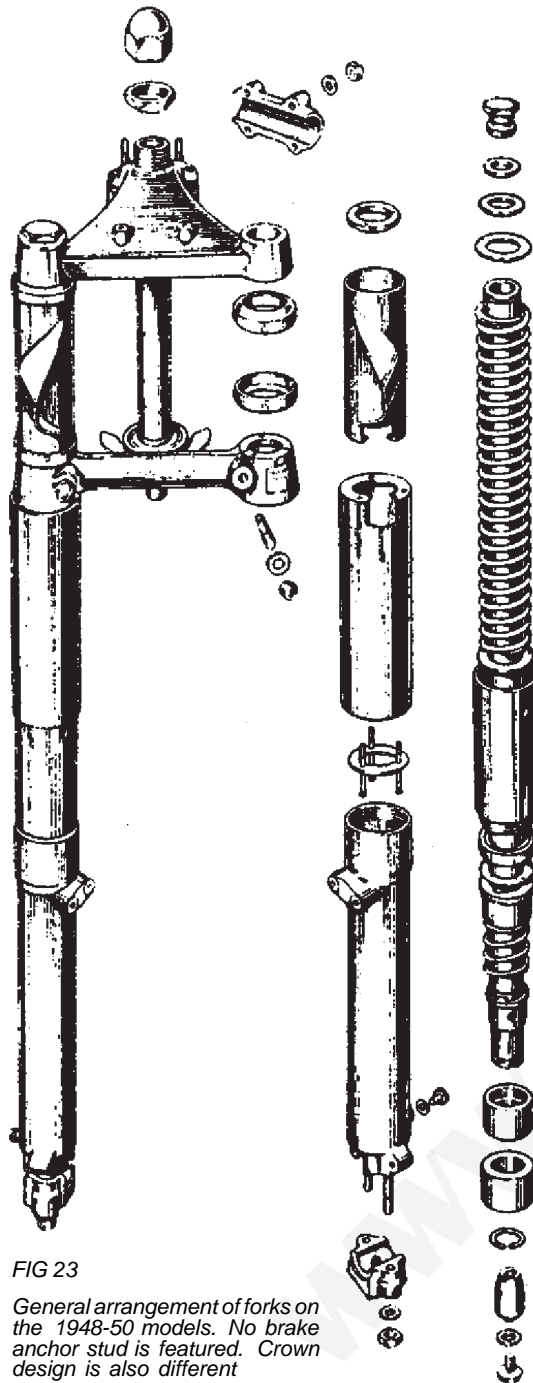


FIG 23

General arrangement of forks on the 1948-50 models. No brake anchor stud is featured. Crown design is also different

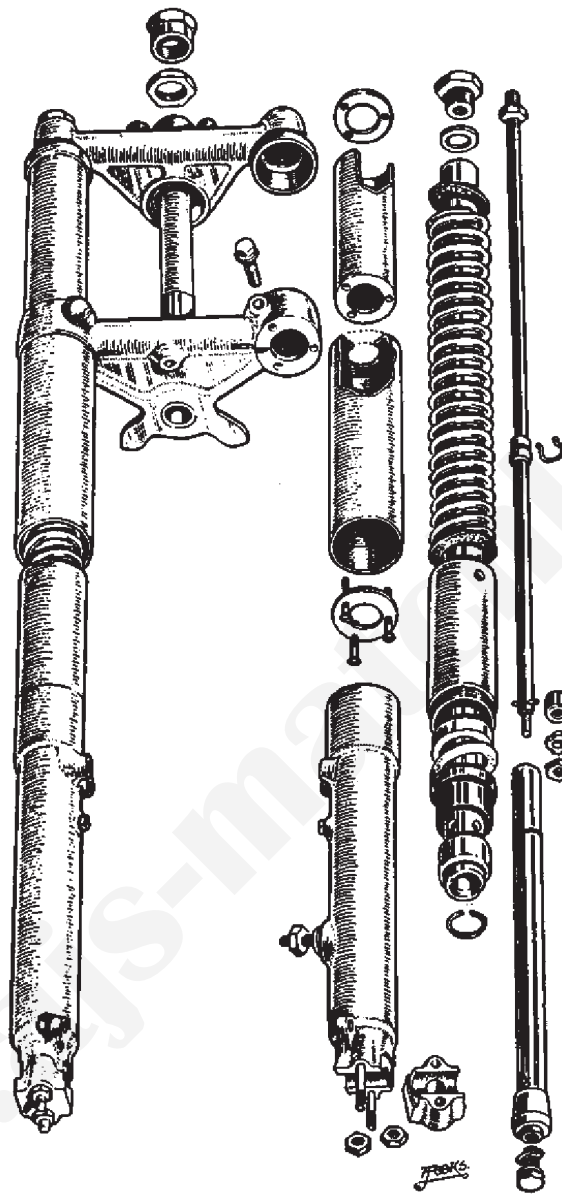


FIG 24

General arrangement drawing of Teledraulic front fork used on the WD G3L. Note the brake anchor stud and bolts for the bottom crown clamps

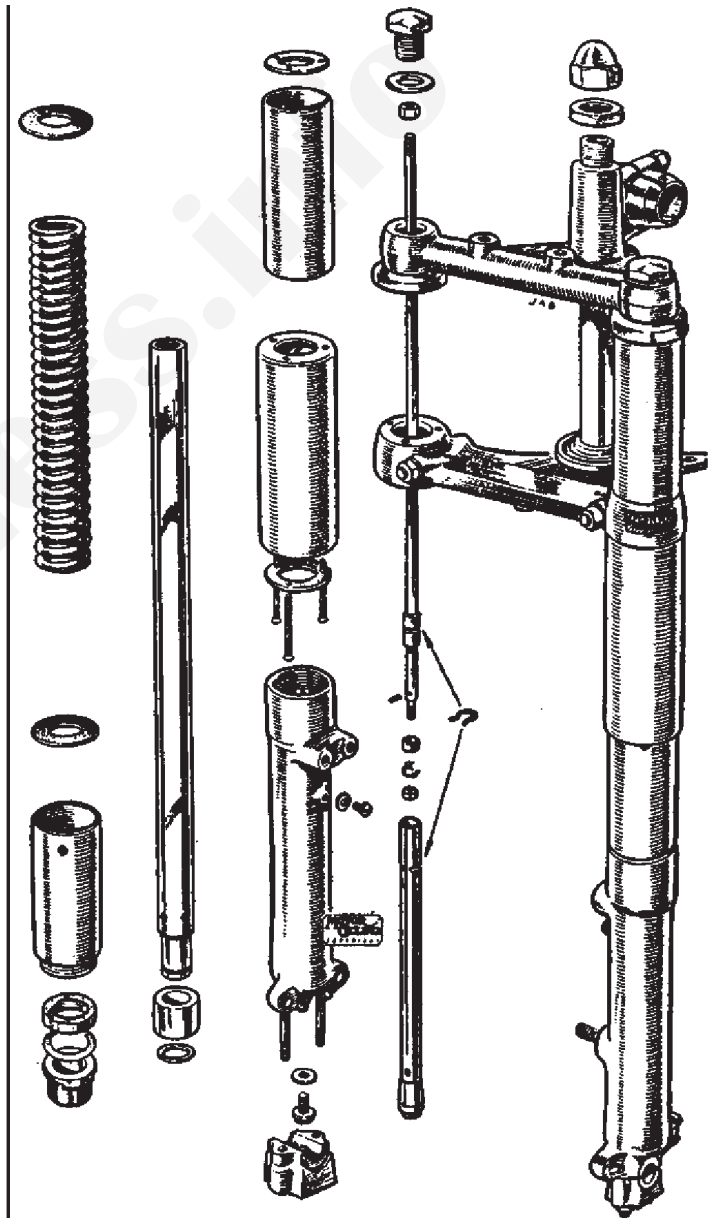


FIG 25

An exploded impression of the Matchless "Teledraulic" front fork arrangement — one of very few enterprising developments launched by a motorcycle manufacturer in time of war and retained for peace production. Bottom crown clamping is by studs and nuts

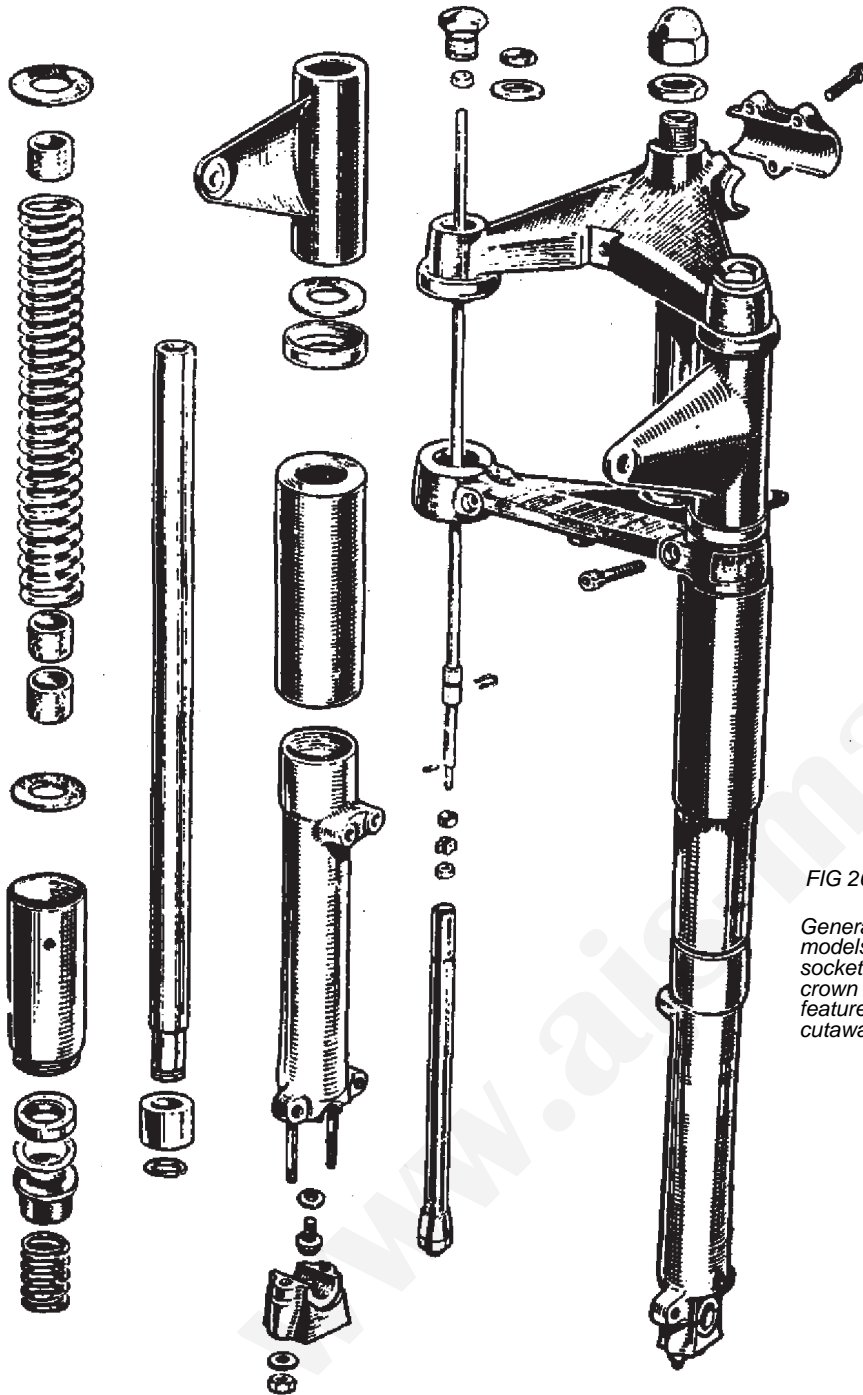


FIG 26

General arrangement of forks on all models except 1948-50. Cap head socket screws clamp the bottom crown on the stanchions. Top crown features a speedometer mounting cutaway with tapped thread

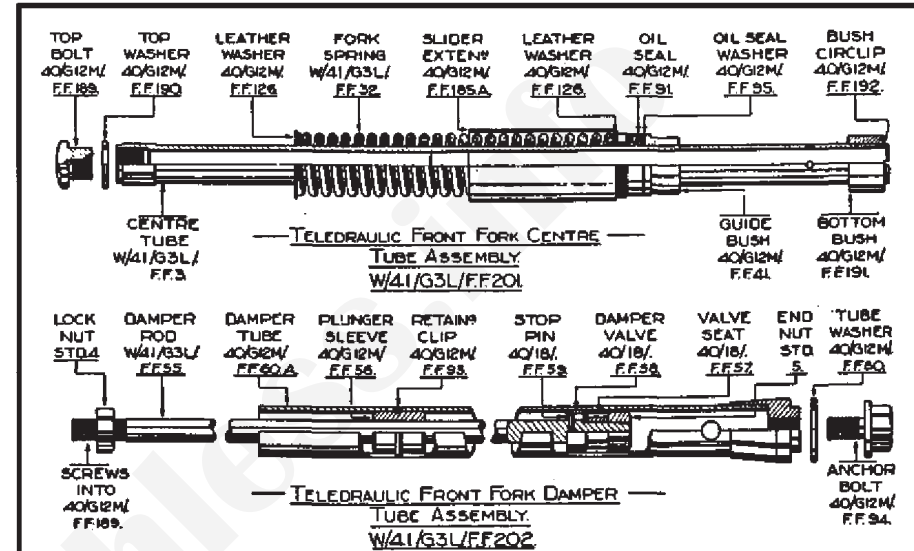


FIG 27

(Above) Details of the assembly order of the WD G3L Teledraulic front forks

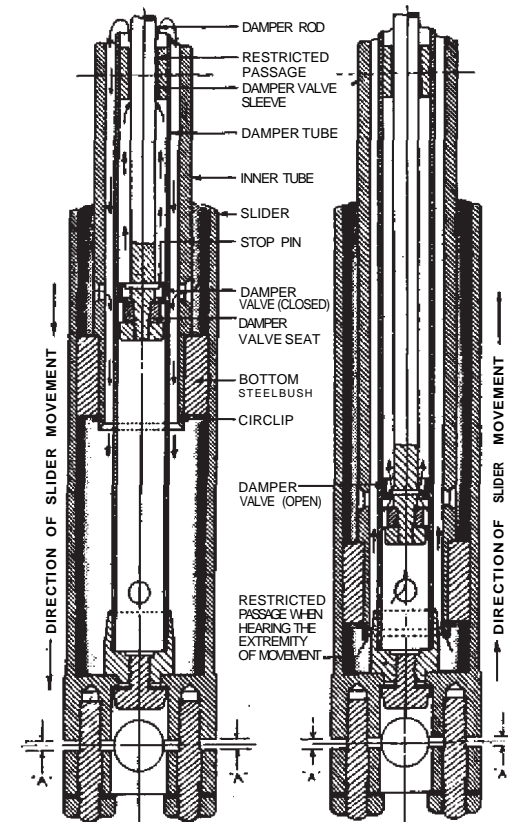


FIG 28

(Right) Oil movement in the WD fork, recoil on the left, bump on the right

To Grease or Change the Unit Springs

Apply a clamp on the outer tube close to the bottom pivot lug and grip the clamp in a vice. Unscrew the ring nut which is below the bottom cover tube. Slacken the lower pivot lug, take the clamp out of the vice, then turn the unit upside down.

Take off the clamp, the bottom pivot lug and the bottom cover tube; when the spring can be removed. On models made after 1953 a circlip is used in place of the ring nut.

Dismantling this type of unit is a two-handed task; the help of a second person is needed to compress the spring to extract the circlip.

To reassemble reverse the dismantling instructions.

Steering Head

To check for correct adjustment take the weight off the front wheel by placing a support beneath the frame or footrests. Place one hand under the front guard and the other on the steering head and check for movement, or attempt to obtain movement, lifting upward and forward. If slackness is discerned, adjust as follows:

Slacken the nuts on the fork-crown studs and the nut above the steering column. Tighten the hexagon beneath the dome nut and again check for movement. Repeat this tightening-up drill until no "shake" is discernible and the fork assembly rotates freely. When satisfied that adjustment is correct tighten down the dome nut and the fork-crown stud nuts or screw. If a steering damper is fitted it should be quite slack during this work.

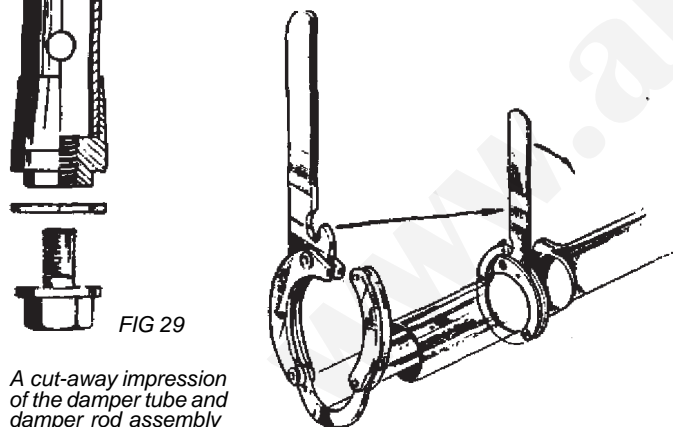


FIG 29

A cut-away impression of the damper tube and damper rod assembly



FIG 31

The tube assembly with main and rebound springs


9. WHEEL BEARINGS

Wheel bearings are of the taper-roller type. They have a fixed location on one side, the other being adjustable. The fixed location has a circlip in a groove cut in one end of the hub shell; the adjustable location is by a screwed ring, threaded into the hub, and a locking ring. The rear-wheel adjusting ring is at the left side of the hub and on the front wheel at the right. When adjusting ensure that there is a little end-to-end play — about 0.002-in. The maximum rock of the wheel in position should be not more than $\frac{1}{64}$ -in. at the rim.

To adjust the rear wheel remove it from the frame. The front wheel can be dealt with *in situ*. A recommended drill is first to slacken the locking ring after which tighten the adjusting ring until all slackness has been taken up and then slacken back the adjusting ring half a turn. Now tighten the locking ring, seeing that the adjusting ring does not move.

Front Wheel Bearings

Remove nuts and brake cover plate complete. Slacken Fig 32's locking ring (11). Unscrew the adjusting ring fully (10) and remove with locking ring (11) *in situ*. Apply firm pressure to the threaded end of the spindle, so removing from the other end the cup housing (9) for the oil seal, the oil seal itself, the metal washer (7) behind the oil seal and then the outer cap. The front wheel spindle (6), with two sets of rollers, may now be removed from the hub.

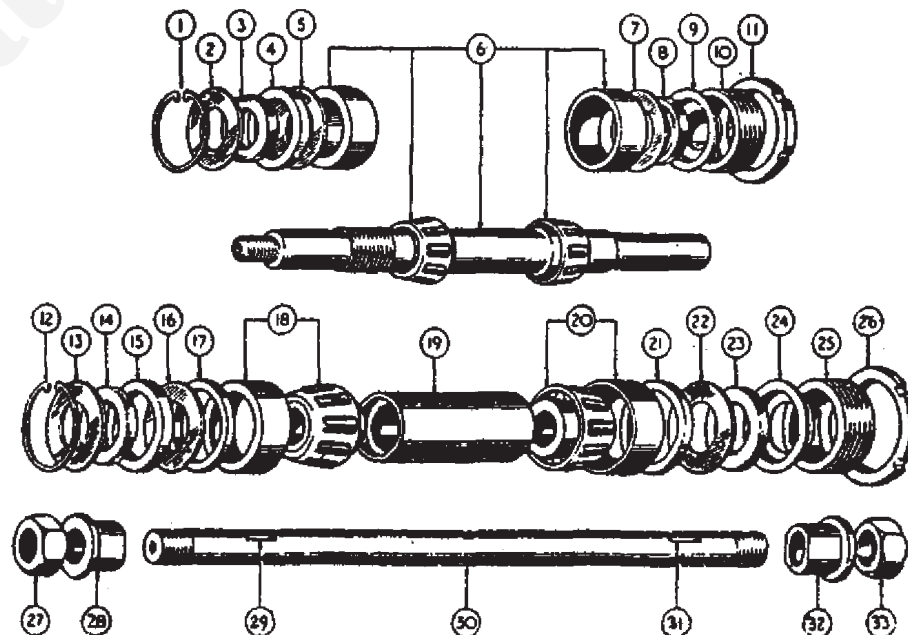

Post-war layout of wheel bearings showing (top) the front-wheel assembly and (bottom) rear hub components for spring-frame models

At the fixed location end exert pressure on the visible washer, so pushing the whole assembly farther into the hub. Remove the circlip (1), Reverse the hub and press on the inside edge of the outer cup (6), forcing it out of the hub. It will bring with it an external oil-seal plain washer (2), the oil seal (3) with encircling spacer collar (4), and the oil-seal inner plain washer (5) and the cup (6).

To reassemble, reverse the above procedure.

Rear Wheel Bearings

In spring-frame models remove brake cover plate, brake shoes, centre spindle with cams, bushes, spacers, nut and speedometer gearbox. Remove the lock nut (see Fig 32s lower part) (26) on the left-hand side and unscrew the adjusting ring (25) completely, removing this with the lock nut *in situ* (26).

At the fixed location end, press the visible washer, so pushing out the assembly at the other end — the cup housing (24) for the oil seal, the oil seal itself (23) and the metal washer behind it (22), the spacing ring (21) between the metal washer and taper bearing, and then the outer cup (20).

Remove the roller cage (26), centre spacer (19) and rollers in the cage (18).

At the fixed location end, having applied pressure on the visible washer and removed the circlip (12), apply pressure with a suitable tool through the open end of the hub, on the inner edge of the outer cup (18) and so force out the oil-seal plain washer (13), the oil seal (14) with its encircling spacer collar (15), the oil-seal internal plain washer (16), and the spacing ring (17) between the metal washer and the taper bearing. Take out the cup (18).

To reassemble, reverse the above procedure.

Two types of thrust-pad adjustment used to compensate for brake-fining wear,

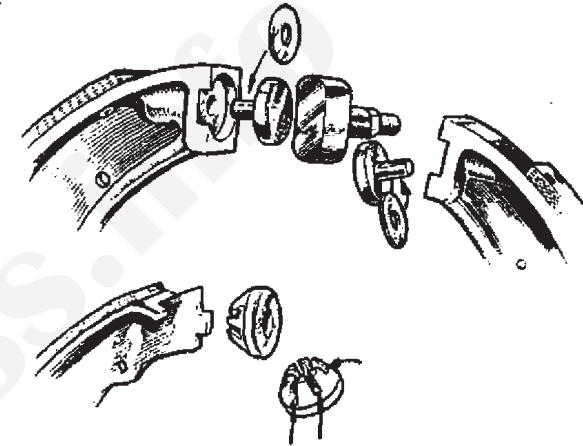


FIG 33

If this adjustment is ineffective, slightly enlarge the hole in the cover plate and repeat the process.

Water in Brakes

Brake linings which are not affected by water to any considerable extent are available for machines made after 1947. The use of a thin steel washer behind the rear cover plate will allow water to escape and thus ensure that the brake is unaffected.

10. FRONT AND REAR BRAKE ADJUSTMENT

Brake adjustment to compensate for lining wear is made by finger adjustment on the rear brake rod and the front-brake cable adjuster. When excessive movement develops it can be taken up by adjusting the position of the thrust pads fitted to each brake shoe.

Where steel brake shoes are used, the collar position can be varied as the slots machined in it are of a different depth.

With alloy brake shoes, washers are used under the head of the steel thrust pins.

Centralizing Brakes Shoes

In order that both shoes contact the brake drum simultaneously and to remedy a "spongy effect", release the nut securing the brake cover plate and apply pressure on the brake pedal or handlebar lever, depending upon which brake is being dealt with. Maintain this pressure and retighten firmly the brake cover nut. The brake adjustment can be closed up considerably to improve brake efficiency.

11. DYNAMOS

Two types of dynamo were fitted, 1939-49: E3AR/A05/1, with negative earth; 1950-55: E3-N, with positive earth. The later (longer) type can be fitted to earlier models if the kickstarter case is exchanged. Some W.D. machines used Miller equipment, some Lucas,

Dynamo Chain

To adjust the chain, remove the inspection cap (front chaincase), unscrew the dynamo clamp bolt, turn the dynamo with a spanner engaged on flats on the left side of the component. There should be ¼-in. chain whip. Check through the inspection cover hole. The armature shaft is eccentric to the body of the dynamo, therefore, to tighten the chain the dynamo should be turned anticlockwise; to slacken it, turn the dynamo clockwise.

Screw up the dynamo clamp bolt and re-check. Use this opportunity to check the oil level in the chaincase.

Magneto Chain

To adjust, remove the chain case; slacken the nuts on the magneto platform bolts, insert a lever beneath the end of the platform and prise upwards until the chain whip is $\frac{1}{4}$ -in.; tighten nuts and re-check. Do not forget to grease the chain well before replacing the case.

Removing Dynamo

For all Models before 1953

Remove the front chaincase, clutch, engine sprocket, circlip lockwasher, dynamo sprocket and the rear section of the chaincase. Remove cables, slacken clamp bolts. Take out the dynamo from the drive side of the engine. Instructions for dismantling are given in the previous chapter.

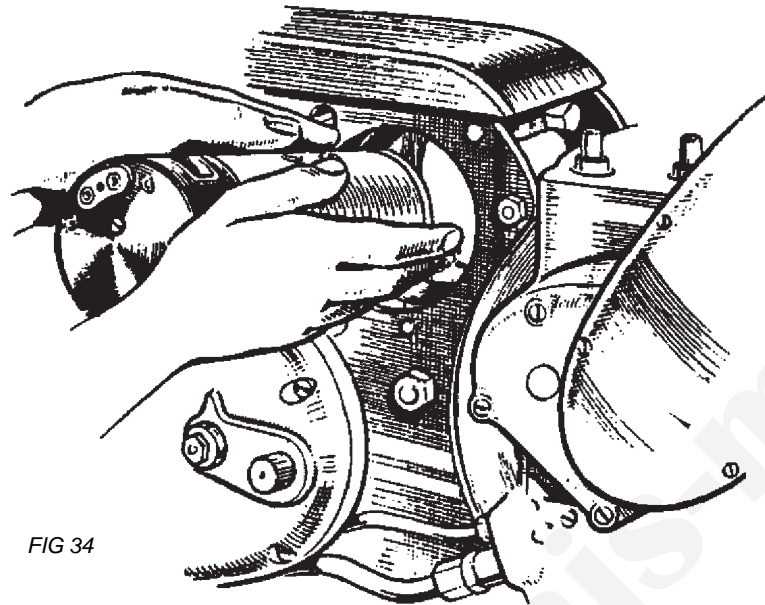


FIG 34

Removal of the dynamo on post-1953 models. In earlier years it was necessary first to take away the gearbox outer cover

For all Models after 1953

Remove the chaincase, the spring circlip and locking plate from the dynamo shaft nut, and with a spanner engaged with the flats at the back of the dynamo sprocket, unscrew the sprocket nut. Place a suitable wedge between the sprocket and the dynamo body when a few gentle taps on the wedge will push off the sprocket without damage to the armature. Remove cables. Turn the dynamo until the locating strip is in line with the keyway in the engine plate. Take away the dynamo from the timing side of the engine, tilting it upwards to clear the gearbox casing.

To refit, reverse the above procedure. Carefully check the position of the locking plate and circlip after the armature nut has been tightened.

12. ELECTRICAL EQUIPMENT

Ignition, 1945-55

Many models have the Lucas type N1-4 magneto. Competition models have the racing NR1 magneto with a manual ignition control. 1954-55 models are fitted with A.T.D. units, and feature the SR1 magneto with rotating magnets.

Where A.T.D. units are standard, a wedge placed between the moving part of the unit and the stop holds the setting in a fully advanced position.

Removing Contact Breaker, N1-4 Magneto

Move aside the swivel blade retaining the contact-breaker cover. Take off the cover and the screw and spring washer securing the spring blade and backing spring. Remove the screw and fibre bush. Straighten the lock-washer under the centre screw retaining the contact breaker and ease off the assembly. When reassembling lubricate the wick with oil.

Contact Points

A special abrasive strip is available for cleaning the contact points. It may be necessary to reface pitted points by using a fine Carborundum stone. If the points are found repeatedly to be burnt, a faulty condenser is usually the cause.

Cleaning Contact Breaker Points

Turn the engine shaft until the points are fully open, clean and check for the correct gap (0.010 to 0.012 in.). To reset the gap, slacken the locknut, set the required gap and tighten the locknut.

SR1 Contact Points

Remove the moulded cover; slacken the nut securing the end of the contact-breaker spring and take off the contact-breaker lever. To adjust, loosen the two screws holding the fixed contact plate and alter the position of the plate until the required gap is obtained.

Dynamo

To test the dynamo while it is on the machine, remove the "D" and "F" cables from the dynamo and connect the two terminals with wire. Run the engine at idling speed and connect the positive lead of a moving-coil voltmeter (calibrated for not less than 0-10 volts) to either of the two dynamo terminals and Jink the negative lead with a good earth point. Slowly increase the engine speed, when the voltmeter reading should rise rapidly and steadily. Do not allow the voltmeter reading to exceed 10V and do not rev up the engine in order to obtain greater

continued on page 34

The 1953 Matchless 350 cc G3L

Bearing an illustrious designation, the G3L is featured here by way of a maker's definitive photograph prior to factory retouching for the 1953 catalogue. Loaned by courtesy of Motorcycle Sport, the picture shows the 350 fitted with the Burman B52 box which superseded the earlier pre 1952 CP type. On the CP box the primary chaincase clutch dome was plain, on the B52 it had the small detachable cover shown here, and on the April 1957-on AMC box there was a large chainwheel-sized cover.

Roadsters gained full-width front hubs from September 1953; the full-width rear hub came in 12 months later. Here are seen the offset-brake types.


Motor is light-alloy head with iron barrel, AJS front-mounted magneto, pre-Monobloc carburettor (Monoblocs arrived in 1955 on AJS and Matchless), and the saddle could be of

Lycetts or Terry manufacture. Twin seats were never offered on rigid roadsters.

Centre stands were used on springers only but a prop stand was an optional extra on all. The speedometer is mounted a 'top the Teledraulics' upper crown, prior to later integration inside the headlamp shell.

A Lucas 6-volt dynamo, driven by a separate short chain from the back of the engine sprocket, is featured. The Lucas alternator (springers only) was introduced for the 1958 season complete with a cast-alloy chaincase to replace the pressed-steel type shown here.

The final year of the G3L was 1955, it being lapsed in August of that year, the already-catalogued G3LS springer holding sole sway in the lists — REG HIDE

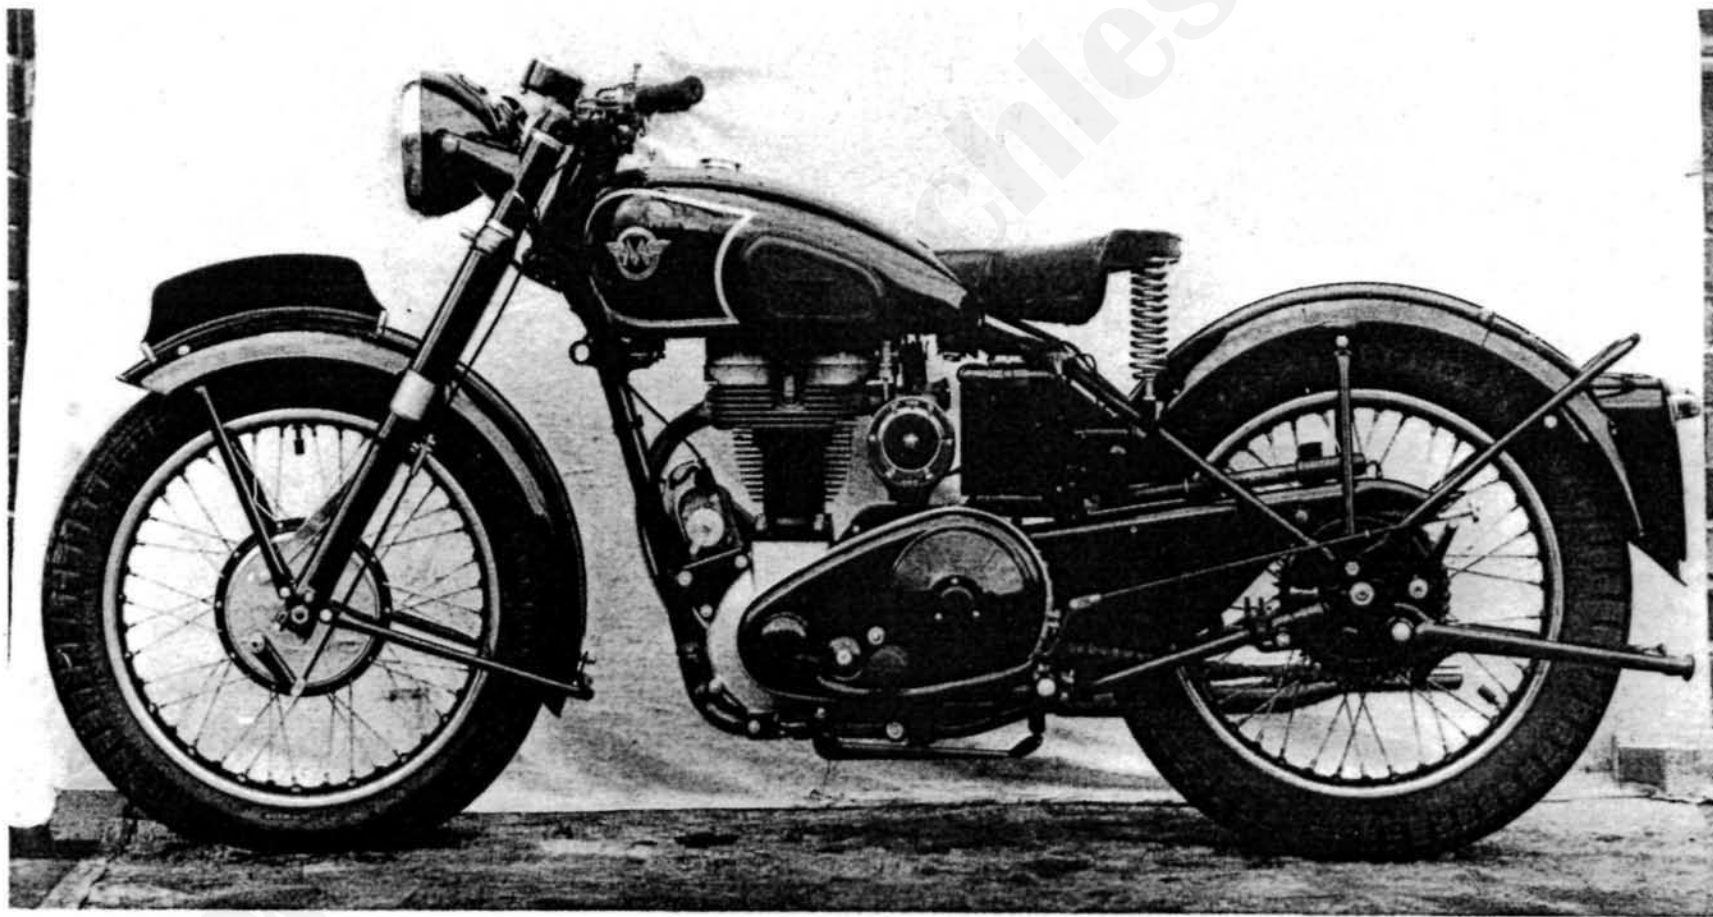

The 1949 Matchless 500 cc G80C

Shown here in the final year of the rigid rear end-only, the G80C did not take swingingarm rear suspension until 1950 when it became known as the G80CS (S for Springer), with the rigid G80C continuing as an inconsequential option right through to August 1955. The first springers had slim-type AMC candle legs though these were soon replaced by the Jampot variety.

A G80S springer however was offered for export-only in 1949.

The G80C shown here has iron head. The engine and frame numbers commenced with 451C and 467C respectively in 1946 and then continued 474C and 576C for 1947, 557C and 978C for 1948, 700C and 1547C for 1949 and 900C and 2105C for 1950 when the new lightalloy head and short wheelbase frame were introduced.


Magneto position on Matchless versions of the AMC singles was behind the cylinder until September 1951 (961C and 2694C) when the Lucas instrument was moved to the familiar AJS

Maker's definitive photographs by
courtesy of Motorcycle Sport



site in front of the engine. In 1952 (1096C and 3218C) a new front brake was fitted from September of that year for the 1953 season.

A twin seat — G80S only — was not offered on the 500 singles until September 1952, the term dualseat (one word and coined by Feridax) being avoided by AMC — REG HIDE

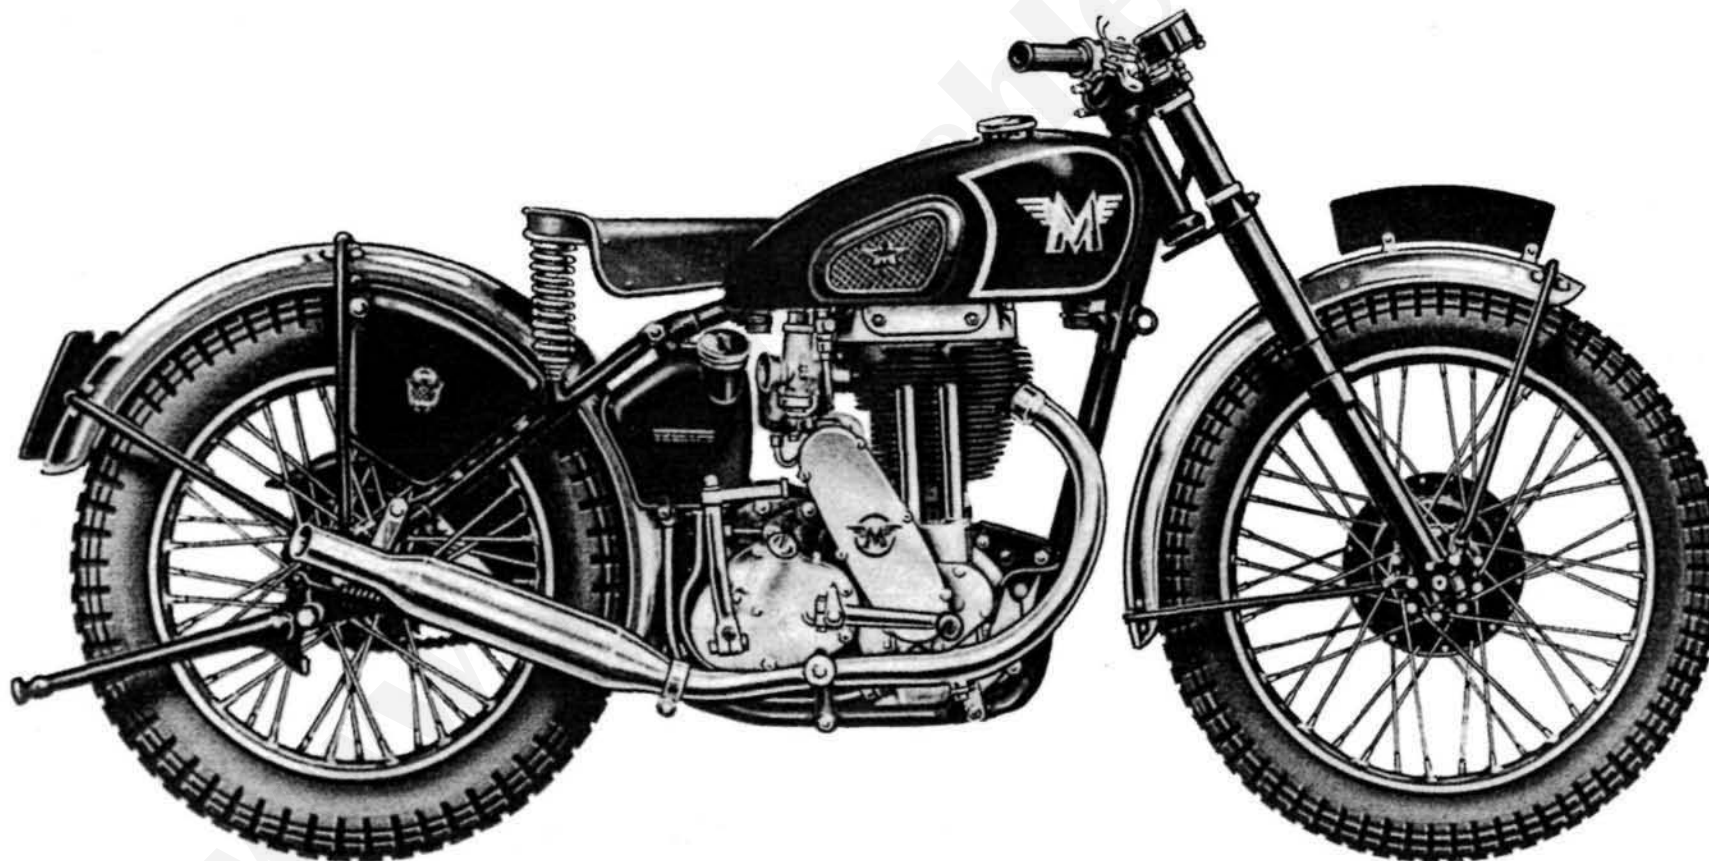




**Maker's definitive photographs by
courtesy of Motorcycle Sport**


The 1959 350 cc Matchless G3C Trials

In the hands of such maestri as Gordon Jackson and Hugh Viney, the AJS/Matchless trials type gained innumerable postwar competition successes, paralleled on the scrambles side by Dave Curtis and others on the Matchless G80-series. The version shown here is for the 1959 season when it became known as the Matchless G3C Trials instead of the G3LC as hitherto. This maker's definitive photograph is not of course strictly within the ambit of this book but being to hand is too important not to include. To many it will represent the culmination of the art of the British big fourstroke trials machine with its accent on plonk.

The G3C Trials, with the AMC gearbox, had a new frame giving 3-inches more ground clearance in September 1956 (frame number 7350-on). The following year saw a wider rear mudguard (7952-on). In September 1958 there came a shorter and lighter frame (8490-on). Girling swinging-fork rear suspension was standard, the units having the clevis lower ends unique to AMC and on the trials machines inclined forward at the top, whereas on the roadsters they were vertical.

Note the tall motor for a 350, the small unchromed tank, Lucas wader magneto, Dunlop saddle, fork-mounted speedometer, cylindrical toolbox below the carburettor and the absence of an aircleaner — REG HIDE

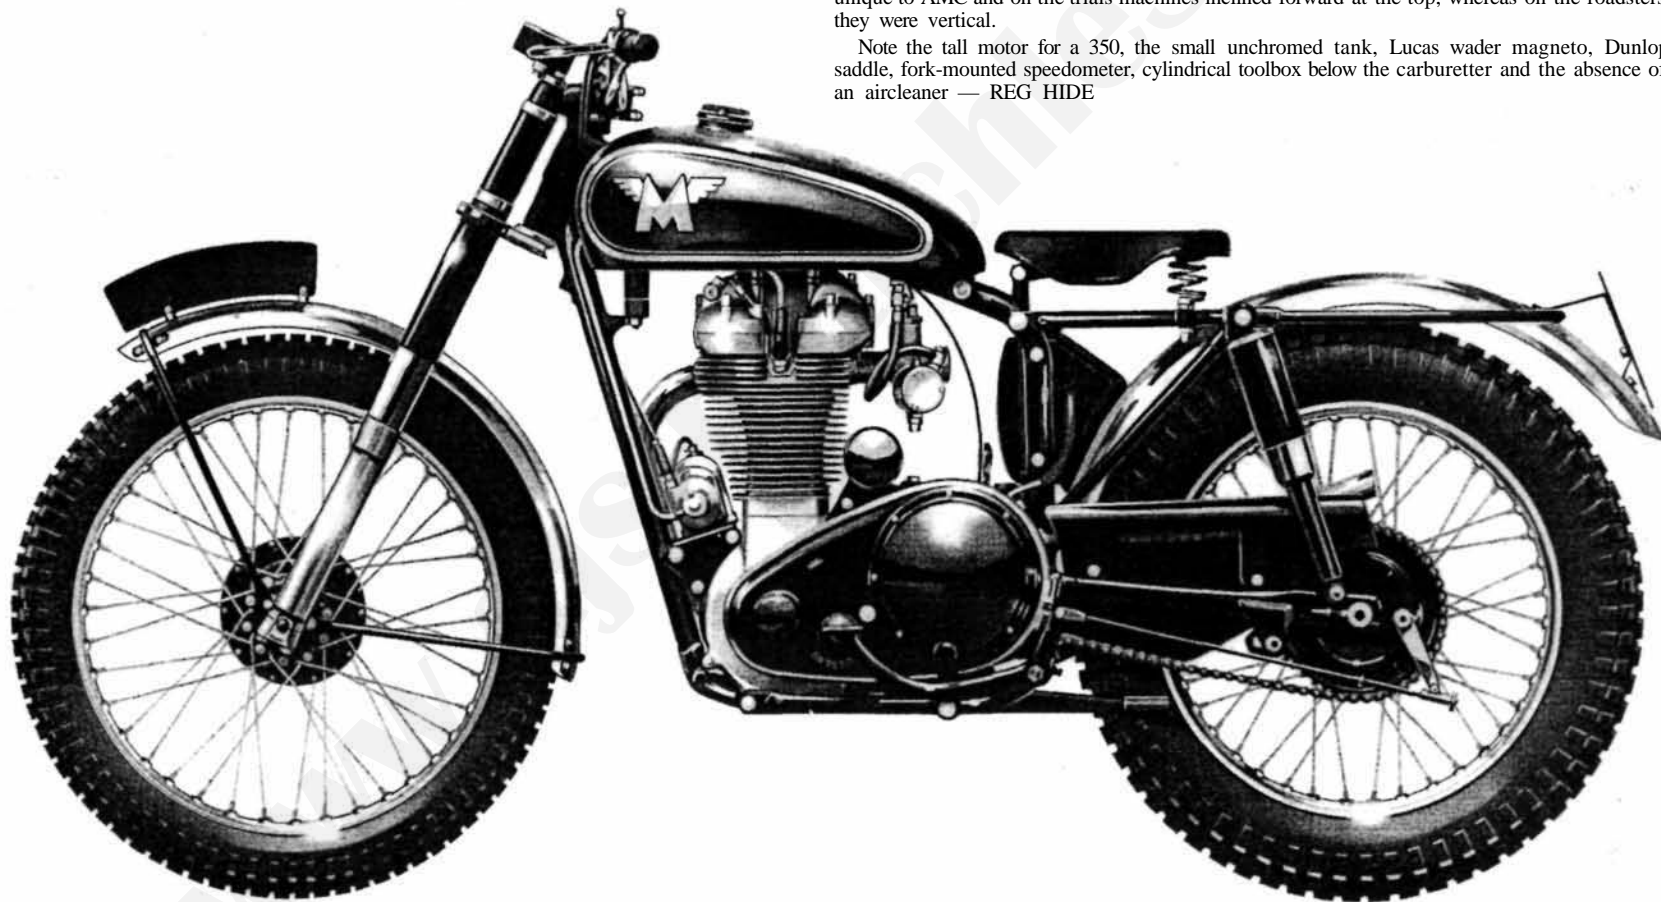

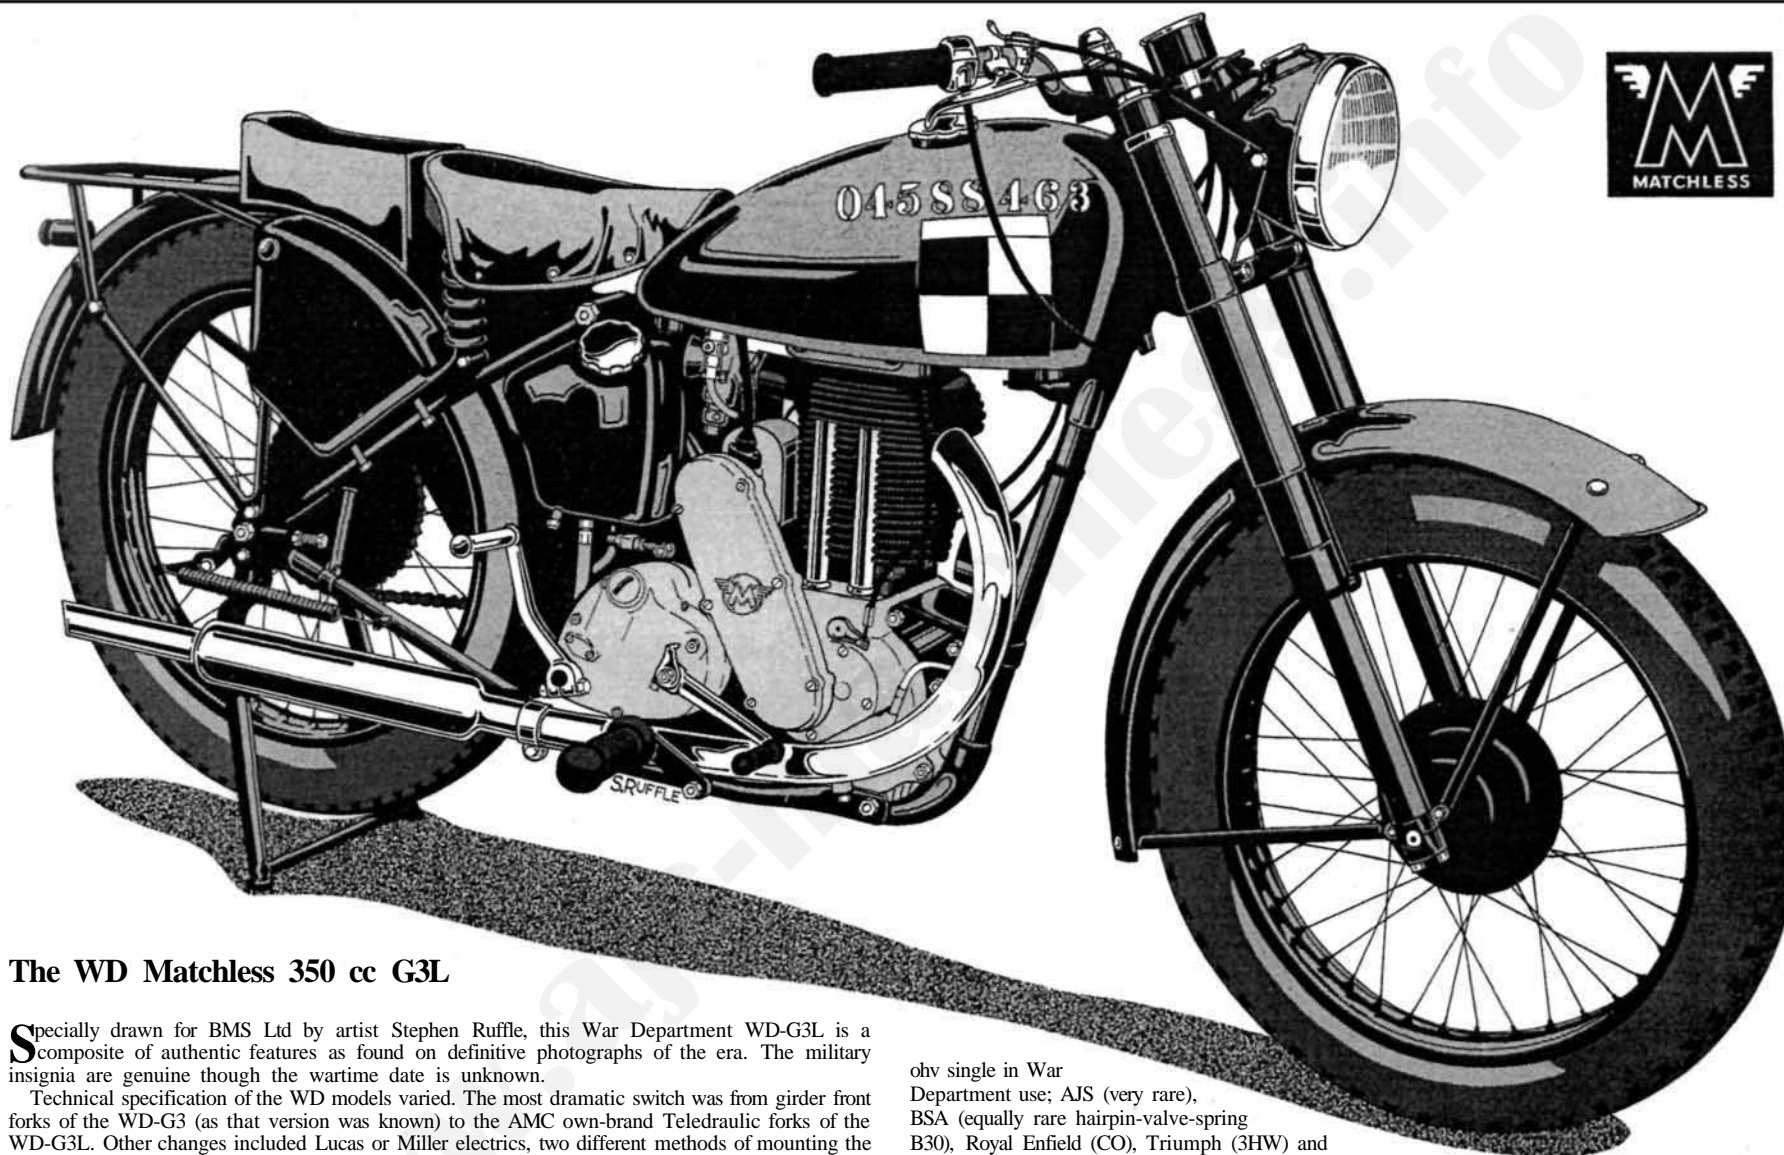

The WD Matchless 350 cc G3L

Specially drawn for BMS Ltd by artist Stephen Ruffle, this War Department WD-G3L is a composite of authentic features as found on definitive photographs of the era. The military insignia are genuine though the wartime date is unknown.

Technical specification of the WD models varied. The most dramatic switch was from girder front forks of the WD-G3 (as that version was known) to the AMC own-brand Teledraulic forks of the WD-G3L. Other changes included Lucas or Miller electrics, two different methods of mounting the main footrests (the inboard rests required an exhaust pipe with a more marked kink than the type shown here), rear lights, rear lifting handles, and the make of pillion seat (when fitted).

Wartime blackout masks on the headlamp were of course in common use. We have traced three different styles of mudguarding and there may have been more.

Matchless were easily the most popular with Don-R servicemen as the marque was the first production machine to be equipped with a telescopic fork. They were also probably the second most numerous though the BSA 500 cc sidevalve M20 — with 126,334 put into Armed Forces service between 1940 and 1945 — was certainly top of the numbers league. Nor was the Matchless the only

ohv single in War Department use; AJS (very rare), BSA (equally rare hairpin-valve-spring B30), Royal Enfield (CO), Triumph (3HW) and Velocette (MAF) all supplied such types though none of these equalled the 350 cc Ariel WNG ohv single in numbers.

At the outbreak of war, 3 September 1939, the British forces had 21,000 service machines and 6,000 of these were impressed civilian models of many makes and sometimes very up-the-market types. Some 425,000 WD machines of all makes were built during the war and 270,000 were in service on VE day.

Few Don-R's would quarrel with the claim that it is the Matchless G3L that is remembered with the greatest affection — REG HIDE

The 1949 500 cc Matchless G80

With its all-iron overhead-valve single-cylinder engine, the AMC-made Matchless G80 was unchanged postwar until September 1950 when the 1951-season models took a die-cast light-alloy cylinder head, an increased compression ratio and a new clutch.

As with AMC practice, the engine number (stamped on the driveside crankcase immediately under the cylinder) gave the last two digits of the year of manufacture, an oblique stroke, the model designation, another oblique stroke, and then the actual engine number. Thus the 1949 G80, commencing with 9000, would be 49/G80/9000 ...


The frame number that year commenced at 35000 and was stamped on the head lug casting.

Though not roadtested — this being against the maker's policy to allow the specialist press to evaluate their products — the G80's top speed was traditionally in the mid-80's and performance


Maker's definitive photographs by
courtesy of Motorcycle Sport.



was reckoned as being brisk for the engine specification on the Pool petrol of those days. The 7-inch diameter brakes, as with the later fullwidth hub, was always felt to be borderline for the potential of the machine — REG HIDE

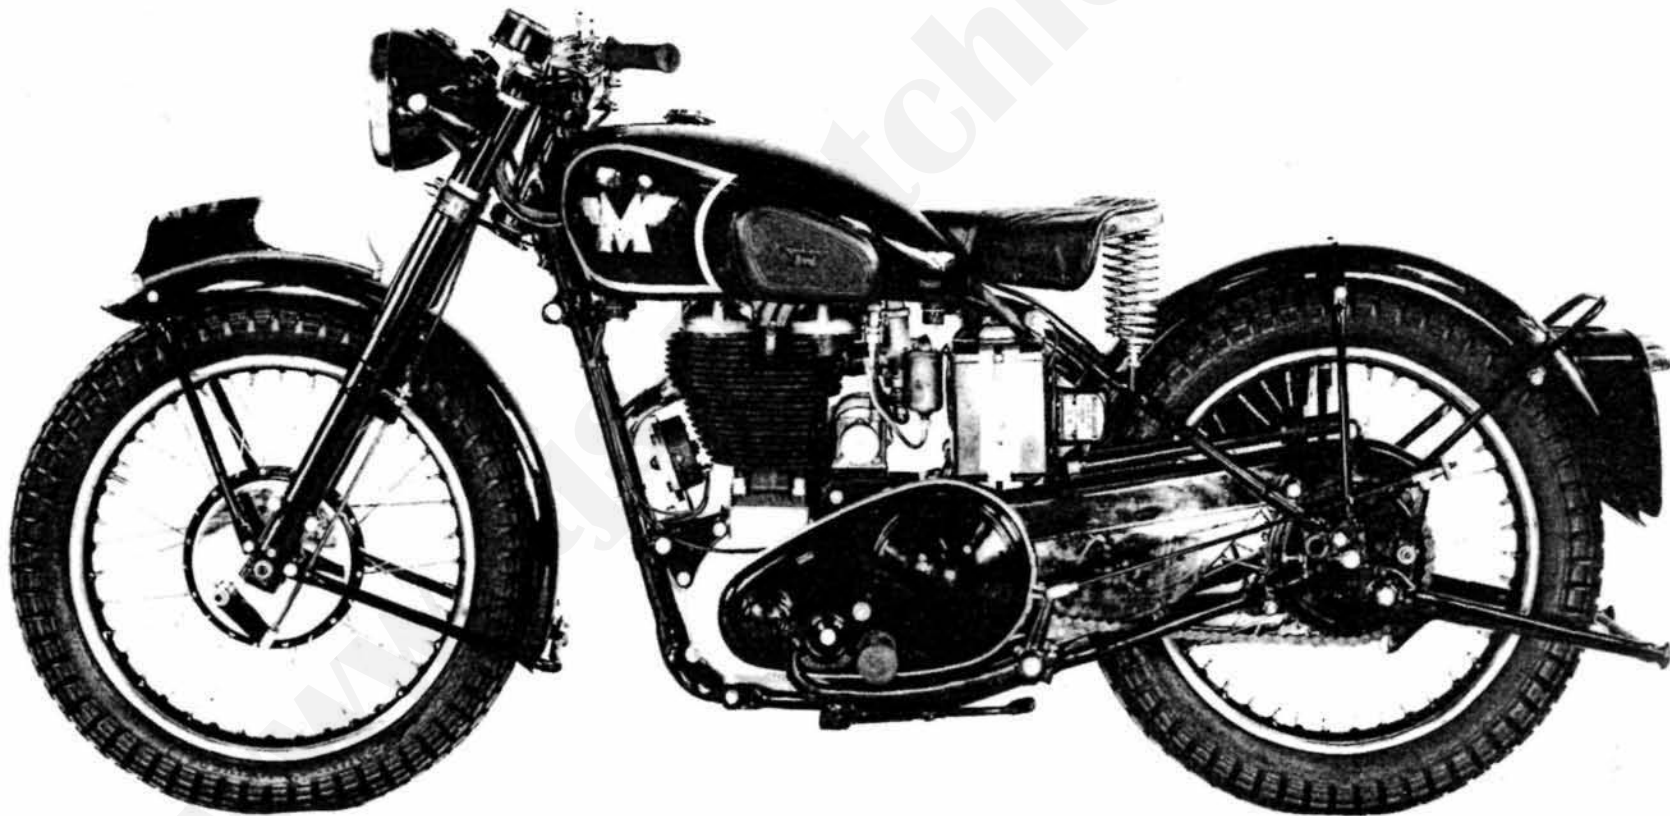

**WIRING DIAGRAM
FOR D.V.R. DYNAMO
WITH 72.M. HD. LAMP.**

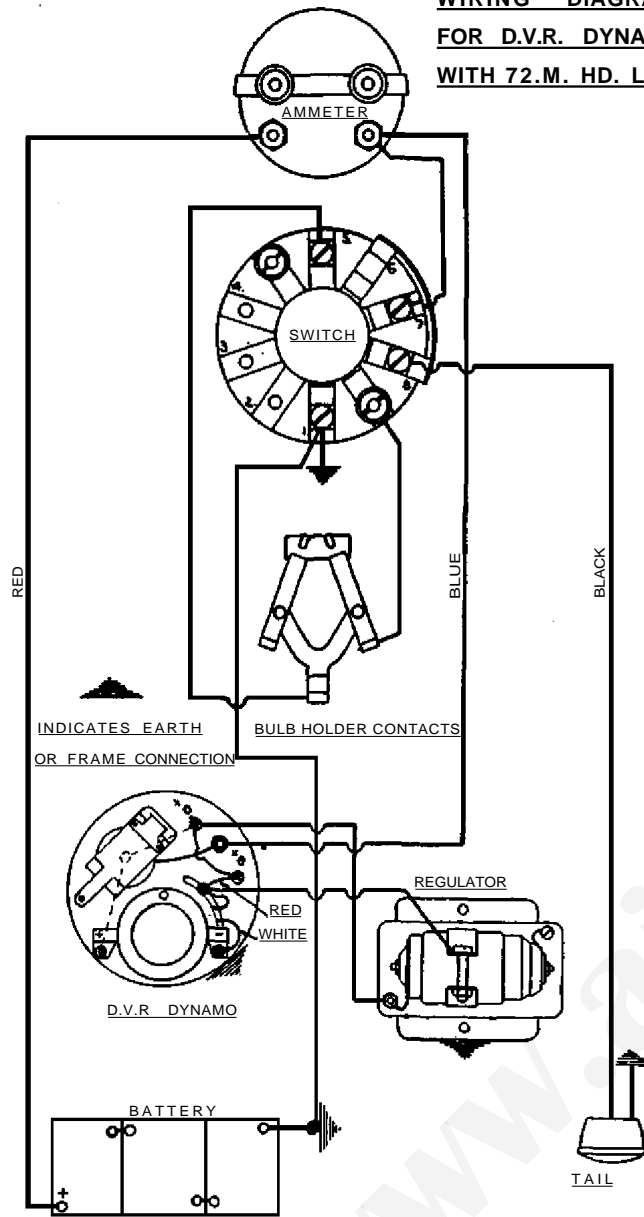

DRG N° 1365
H MILLER & C L^{TD}

FIG 35 Wiring diagram for the Miller equipment found on some WD Matchless machines


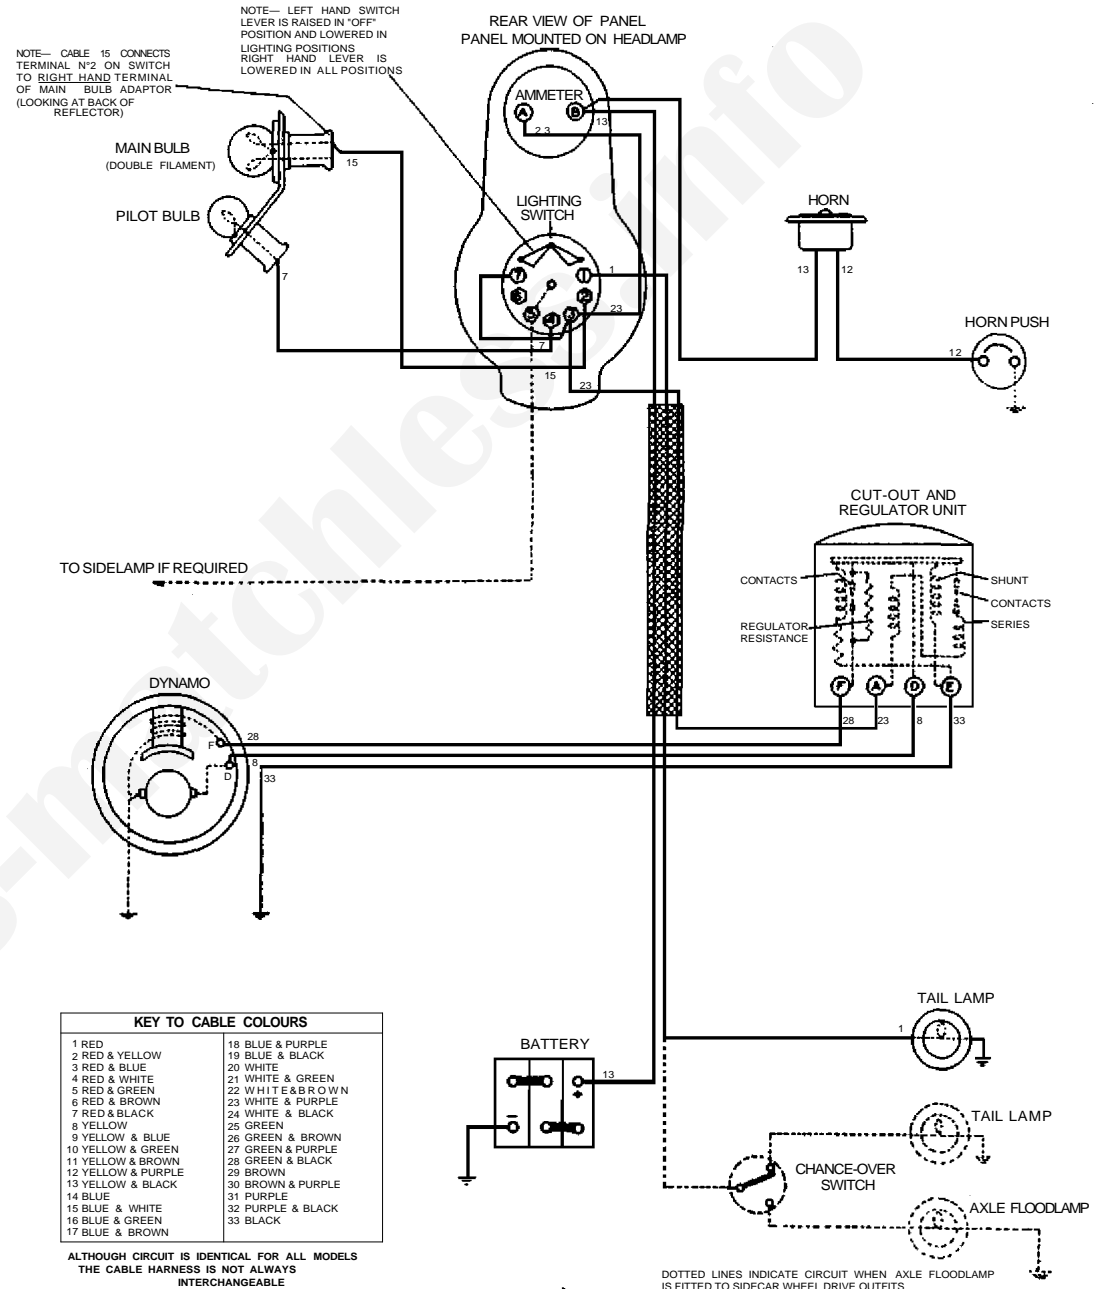


FIG 36 The Lucas wiring diagram for the WD G3L so equipped features minor departures from that suitable for later civilian roadsters

FIG 37

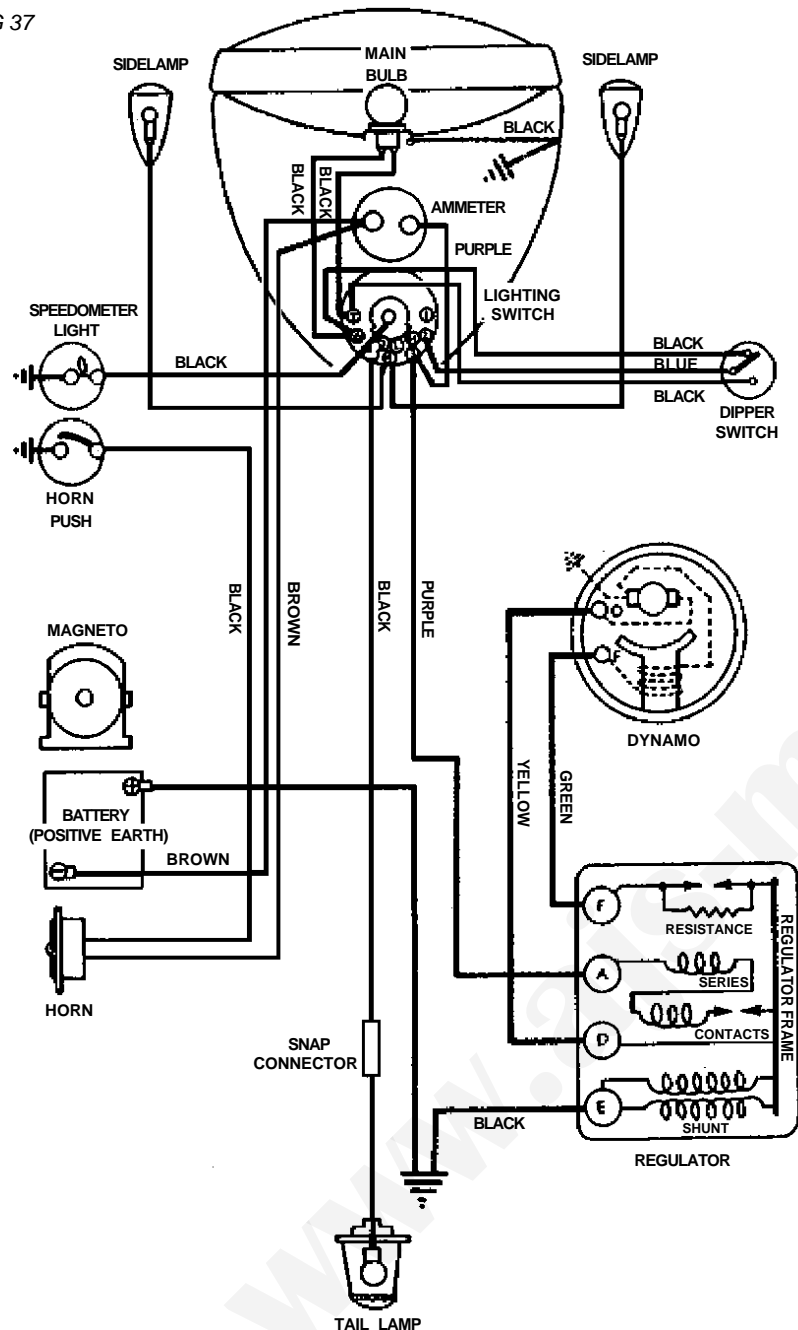

1952-55 positive earth system. Note: Use one lead for pitot when twin side lamps are not fitted

MATCHLESS SINGLES 1935 -1955

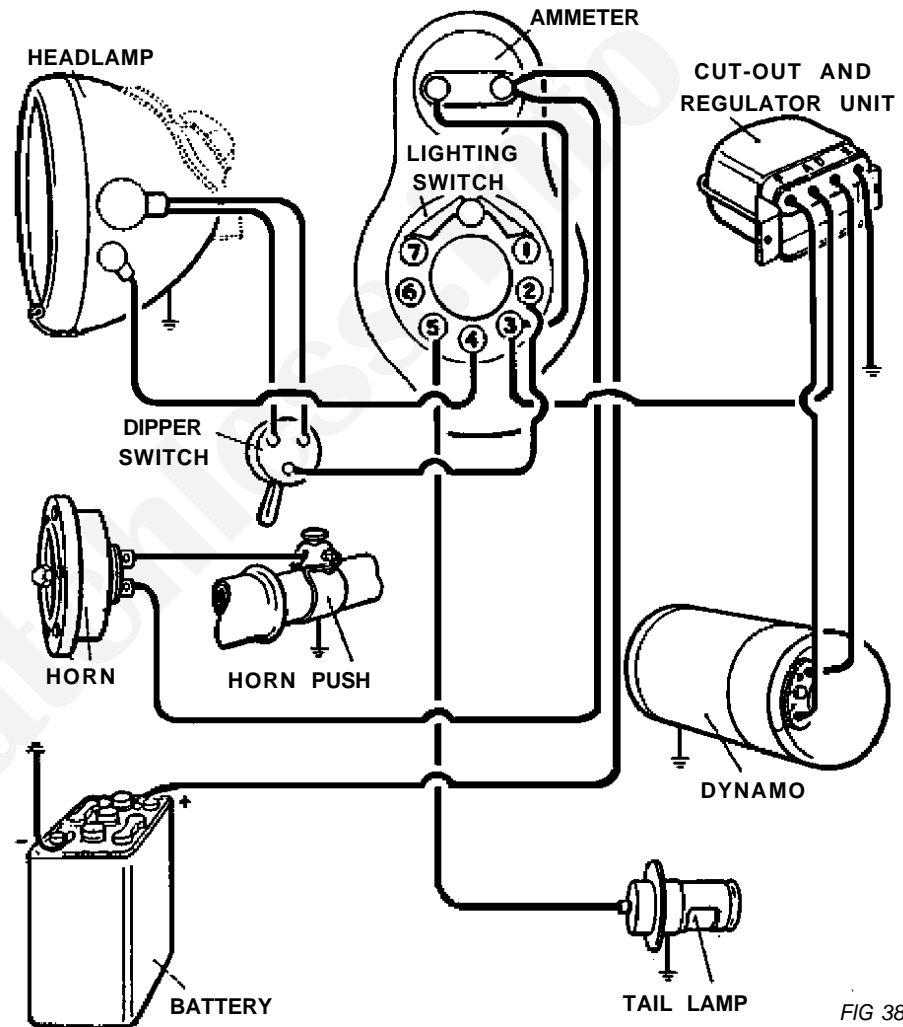


FIG 38

Both WD and civilian roadsters to 1951 operated on the negative earth system. This can easily be transposed to positive earth and the dynamo polarity readily reversed

voltage — one-eighth throttle is considered sufficient and, if the above reading is obtained, the dynamo is in order.

If there is no reading, check the brushes. If there is a reading of about 1 ½ to 2 V only, the armature winding may be faulty. It may be necessary to remove the dynamo. For dynamo removal procedure see page 27. If a reading of about ½ V is obtained, the field winding may be at fault. It is recommended that if an overhaul is necessary the services of the dynamo manufacturer should be sought.

Both W.D. and civilian roadsters to 1951 operated on the negative earth system. This can easily be transposed to positive earth and the dynamo polarity readily reversed.

Compensated Voltage Control Unit

The regulator is set to maintain a predetermined generator output at all speeds and controls the flow to the battery. The rate of charging is at its maximum when the battery is at lowest ebb, and at minimum when the battery is fully, or almost fully, charged.

When the battery is in good condition the dynamo gives a trickle charge and an ammeter reading of about 1 to 2 amp. The cut-out is an automatic switch connecting the dynamo and the battery. When the engine is running fast enough to cause the voltage of the dynamo output to exceed that of the battery, the cut-out links up the battery for charging. When engine speed is low or the engine not running, the cut-out disconnects the battery from the dynamo, so preventing the battery discharging through the brushes and commutator. If, under normal running conditions, the battery is continually in a low state of charge, or is being overcharged, then the regulator setting should be adjusted at a Lucas Service Station. The C.V.C. unit is marked with the letters "F", "A", "D" and "E". "E" is earthed, "A" is connected to the ammeter and "F" and "D" pair with markings "F" and "D" on the dynamo.

It pays to use the services of an expert, so do not yourself meddle with the C.V.C. settings and cut-out contacts.

13. EX-W.D. MODEL 350cc 41-G3L

Army models were first manufactured in 1939 and were similar to the 1939 civilian models. These machines are also similar to the 1945 models, with the exception that girder instead of "Teledraulic" forks were fitted. Instructions for fork servicing, overhauling and reassembling, therefore, have wide application. "Teledraulic" forks can be fitted to girder-fork models, the front frame layout being similar. The changeover necessitates the speedometer drive from the front wheel being discarded and transferred to the rear wheel, as on later models fitted with "Teledraulic" forks. This work involves the rear hub being machined. Two slots are cut in the face of the hub tube to drive the speedometer gearbox. If good workshop facilities are not available the owner is advised to purchase a second-hand ex-W.D. wheel. An alternative method is to make an adapter. The

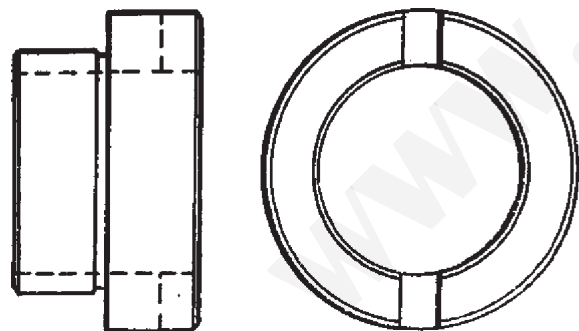


FIG 39

Speedometer drive. Adapter details for modification of a 1939 model for "Teledraulic" front suspension

hollow spindle must be reversed to permit the wheel to be bolted to the brake drum, as on civilian models. Note that the quickly detachable method cannot be used when the speedometer drive is modified in this way. A new rear wheel and a solid spindle with distance piece, speedometer drive and cable are required to complete the conversion.

The near-side fork slider anchoring the front brake can be exchanged for a later type if W.D. "Teledraulic" forks are used; alternatively, modify the front-brake anchorage, employing the front mudguard fixing bolts for this purpose. W.D. models were purposely detuned by a reduction of the compression ratio to 5.8, effected by a $\frac{1}{16}$ -in. compression plate between the cylinder and crankcase. A $\frac{7}{8}$ -in.-bore carburetter was standard.

Gear ratios (1941) provided for a low bottom ratio, similar to that on the post-war competition machines. An improved valve timing was introduced on engines after No. 54512. Owners of 1941 models can convert their machines, if they are in the original form, to the civilian counterpart by the following procedure:

Remove the compression plate, then machine away the ridge in the cylinder barrel at the limit of the piston-ring travel. Steel washers $\frac{1}{16}$ -in. thick for push-rod tubes can be dispensed with. Fit the later-type carburetter with bore size 1-in., the inlet port being enlarged to match the carburetter; this applies also to the distance piece. Change the main driving gear and layshaft fixed pinion for similar gears of the standard type (30/20) teeth.

Engine efficiency can be further increased by fitting post-war high-lift cams, provided that the valve-lifter shaft is dealt with as described in an earlier chapter and by taking care to check the valve motion as a precaution against the valve springs closing up or being coil-bound when the valves are at full lift.

If it is desired to use a machine for scramble-type events, the following modifications will be found useful:

Discard the timing-side roller bearing and use a double-diameter bronze bush, obtainable from the makers. Modify the flywheels to take a $\frac{7}{8}$ -in.-diameter crankpin, assuming the engine is fitted with the earlier-type $\frac{3}{4}$ -in. shaft. Fit the shorter-type 1947-55 connecting rod and use a high-compression piston of 9.5 :1 ratio. Discard the compression plate and steel washer for push-rod cover tubes ($\frac{1}{16}$ -in. thick).

Fit 1948-type valve springs, top collars and an exhaust pipe of 1 $\frac{3}{4}$ -in. diameter, 48-in. long. Also enlarge the inlet port to 1 or 1 $\frac{1}{16}$ -in. and use a carburetter to match.

If workshop facilities are available, modify to use an inlet valve $\frac{1}{32}$ -in. larger in diameter than standard. The valve seat should be made approximately $\frac{3}{32}$ -in. wide and a cutter used to reduce valve-seat width. With this arrangement, check the valve motion and ensure that the valve head does not foul the cylinder barrel when the valve is at full lift. The application of a half-round file to the cylinder barrel at the point of contact will provide the necessary clearance.

The inlet-valve guide can be made of bronze with a bore of $\frac{5}{16}$ -in. for the inlet valve instead of the normal $\frac{3}{8}$ -in. The exhaust-valve stem diameter should not be reduced. Exhaust-valve material is KE 965.

An excess of oil in the combustion chamber will affect engine performance, and the reader's attention is drawn to the procedure for reducing oil supply to this part of the engine in the chapter dealing with 1945-55 models, with particular

attention to 1947 models, iron heads.

If at any time the oil-pump plunger and timing-side shaft is changed, care should be taken to ensure that the new parts are of the correct type. In 1947 a two-start pump was introduced; it can be identified by the marking 2S on the oil-pump shaft end and by 2S marked on the timing-side shaft worm. The new parts will not interchange with the old. To adapt the new pump and timing-side shaft in ex-W.D. models, it will be necessary to fit a $\frac{3}{8}$ -in.-diameter oil-return pipe and enlarge the oil-return passage in the crankcase.

To improve braking efficiency — provided that expense is not important — 7-in.-diameter brake parts (1948 type) can be fitted to front and rear wheels, the brake anchor on the front wheel being modified to fit on to the top lugs.

If a prop stand is inclined to bend, or the stop fails, the fault may be due to wear in the lug in the frame on which the prop stand pivots. Ream out the lug hole and insert a thin steel bush.

Combinations

The 41-G3L is suitable for conversion for sidecar work. The wheels, frame and forks are similar to those used on the 1945 500 cc machines. Fit a 16-tooth engine sprocket, stronger front springs, sidecar-type 951/54 12 $\frac{3}{4}$ -in. long. Also fit a steering damper and use a lightweight sidecar.

A cylinder-head "steady stay" can be used to damp down the effect of engine torque. The parts can be obtained from the makers and include, apart from the "steady stays" and clip, a special bolt with extended thread to accommodate one end of the stay. When servicing the engine ensure that the hardened valve-end caps, used on all engines up to 1948, are not dislodged when refitting the rocker box.

Wheel Alignment

To check wheel alignment use a straight wooden batten, raised about 4-in. from the ground; adjust until the batten touches each tyre at both sides of the wheel centres. Alternatively, use a length of string, tightly stretched. If tyre sizes are unequal, balance the gap between the batten and the front tyre.

Wheel Bearings

Wheel bearings are of the taper-roller type; the inner races and rollers are integral with the wheel spindle, the outer cups being a pressed hub shell. At one end is an adjustable location, the other end being fixed. Each roller bearing has an oil sealing ring and, where a felt washer is fitted, this should be changed to the later-type rubber sealing ring.

To adjust, rotate the ring screwed into the hub shell and secure it by means of the locking ring. Rear-wheel adjustment is made from the brake side with the wheel removed, and on the front wheel from the right-hand side with the wheel *in situ*. The amount of end-play in these bearings is 0.002 in., and if adjusted too tightly damaged bearings will result. Tighten the adjusting ring until movement is not discernible, then slacken half a turn. When tightening the locking ring ensure that the adjusting ring does not move.

Dismantling Wheel Bearings

Remove the cover plate and brake shoes. When dealing with the rear wheel take out the centre spindle and remove the speedometer drive complete. Remove the locking ring and unscrew the adjusting ring. Remove the adjusting ring, locking ring, dished steel washer, oil seal and plain steel washer. Turning to the other end, remove the spring ring, plain steel washer, oil seal with spacing collar, plain steel washer and spindle, complete with rollers and cages and one outer cup. Press out the hub shell from the other end, leaving the outer bearing cup in position.

ABRIDGED DATA

ENGINE

Cylinder Bore :

2.7187 in. \pm .0005 in. Rebore to + .020 in when wear exceeds .008 in.

Small-End Bush :

$\frac{7}{8}$ in. +.0005 in. - .00025 in.

Crankpin Diameter :

1.20325 in./1.20350 in.

Big-End Eye (I/D) :

1.70375/1.70400 in.

Rocker Spindle Bushes :

$\frac{7}{8}$ in. + .001 in.

Rocker Spindle Sleeve:

.6230 in./ .6235 in.

Camshaft Bushes :

$\frac{1}{2}$ in. \pm .0005 in.

Timing Side Mainshaft Bush :

$\frac{7}{8}$ in. +.00125 in.

Gudgeon Pin :

$\frac{7}{8}$ in. —.0015/.001 in.

Piston Diameters :

Top Land. 2.6877 \pm .0005 in.
Second Land. 2.6962 in. \pm .0005 in.
Third Land. 2.6962 \pm .0005 in.
Top Skirt. 2.7132 \pm .0005 in.
Bottom Skirt. 2.7143 \pm .0005 in.

Piston Rings :

Compression (2) 2 $\frac{23}{32}$ x $\frac{1}{16}$ in.
Scraper (1) 2 $\frac{23}{32}$ x $\frac{1}{16}$ in.
Gap: .006/.008 in. normal.
Maximum .030 in.

Valve Stems:

.375 — .0035/.0045 in.

Valve Guides : (I/D)

$\frac{7}{8}$ in. \pm .0005 in.

VALVE TIMING

Early Models :

Inlet opens before T.D.C. 20°
Inlet closes after B.D.C. 67°
Exhaust opens before B.D.C. 78°
Exhaust closes after T.D.C. 28°

Engines numbered 54512 onwards :

Inlet opens before T.D.C. 32°
Inlet closes after B.D.C. 63°
Exhaust opens before B.D.C. 65°
Exhaust closes after T.D.C. 30°
(Set with .016 in. tappet clearance.)

Contact-Breaker Gap :

.010/.012 in.

Ignition Advance (with lever control fully advanced) $\frac{7}{8}$ in.

Sparking-Plug Gap :

.020/.025 in.

CARBURATION

Amal type 275/IJ with 120 main jet. 5 x 5 throttle slide and needle in third or fourth notch.

Gearbox :

Mainshaft, over-all length 10.25 in.
Main sleeve-gear bearing, bore 1 $\frac{1}{2}$ in. x O/D 62 mm. x 16 mm.
Bearing in end cover, bore 12 mm. x O/D 40 mm. x 17 mm.
Ratios, 5.8, 7.5, 12.2 and 18.5 : 1.

Transmission :

Clutch thrust rod, $\frac{9}{16}$ in.
Operating lever clearance (in gearbox) $\frac{1}{32}$ in.

Sprockets:

Clutch 40T for $\frac{1}{2}$ -in. x .305-in. chain.
Engine 18T for $\frac{1}{2}$ -in. x .305-in. chain.
Gearbox 16T for $\frac{5}{16}$ -in. x .380-in. chain.
Rear wheel 42T for $\frac{5}{8}$ -in. x .380-in. chain.

Spokes:

Front left, 5 $\frac{3}{16}$ in. 8G x 10G butted.
" right, 8 $\frac{3}{16}$ in. 9G x 11G butted.
Rear left, 8 $\frac{3}{16}$ in. 6G x 9G butted.
" right, 8 $\frac{3}{16}$ in. 6G x 9G butted.

GEARBOX INTERNAL RATIOS

| | First gear | Second gear | Third gear | Fourth gear (top) |
|-------------|------------|-------------|------------|-------------------|
| Standard | 1 to 2.67 | 1 to 1.76 | 1 to 1.28 | 1 to 1 |
| Competition | 1 to 3.16 | 1 to 2.09 | 1 to 1.28 | 1 to 1 |

FORK SPRING DATA

| Part No. | Year | Free length | |
|----------|---------|-------------------------------------|--------------------------------------|
| 017127 | 1945-46 | 9.997 in. | Solo 6G |
| 010308 | 1948 | 10 ¹ / ₃₂ in. | Soto 6G |
| 012972 | 1949 | 11 in. | Solo 6G |
| 015002 | 1950 | 12.09 in. | Solo 6G |
| 016526 | 1951-54 | 12 ³ / ₄ in. | Solo 6G |
| 016782 | 1951-54 | 12 ³ / ₄ in. | Sidecar 0.212 in. dia. wire |
| 021784 | 1955 | 12 ³ / ₄ in. | Solo 5 ¹ / ₂ G |
| 021789 | 1955-60 | 12 ³ / ₄ in. | Sidecar 0.212 in. dia. wire |

REAR SUSPENSION SPRING DATA

| | | | |
|--------|---------|------------------------------------|---|
| 011945 | 1950 | 8 ⁵ / ₁₆ in. | ⁹ / ₃₂ in. dia. wire |
| 016297 | 1951-56 | 5 ³ / ₄ in. | ⁵ / ₁₆ in. dia. wire (Solo) |
| 016061 | 1951-56 | 5 ³ / ₄ in. | ¹¹ / ₃₂ in. dia. wire (Sidecar) |
| 023373 | 1957-60 | Solo | |
| 023372 | 1957-60 | Sidecar | |

APPENDIX OF USEFUL TECHNICAL DATA

The following data are common to all machines except ex-W.D.
350 c.c. Model 41-G3L.

| | |
|---|---|
| Stroke 93 mm. | Crankpin rollers 0.25 x 0.25 in. (30 off) |
| Tappet clearance Nil, t.d.c., firing stroke | Connecting-rod sleeve <i>in situ</i> diameter 1.70375/1.70400 in. |
| Magneto contact gap 0.012 in. | Driving-side shaft 0.9997/1.0002 in. |
| Flywheel balance factor 65 % | Gudgeon pin size ⁷ / ₁₆ in.-0.0010/0.0013 in. |
| End float (max.) 0.025 in. | Rocker axle bush ⁵ / ₁₆ in.+ 0.00075 in.-0.0005 in. |
| Valve lift ⁵ / ₁₆ in. | Rocker axle sleeve, O/D 6.6230/0.6235 in. |
| Valve seat angle 45° | Small end bush ⁷ / ₁₆ in.+0.00050 in.-0.00025 in. |
| Camshaft bush ¹ / ₂ in. ± 0.0005 in. | Valve timing 0.016 in. tappet clearance |
| Camshaft axle ¹ / ₂ in.-0.00125/0.00175 in. | |
| Crankpin diameter 1.20350/1.20375 in. | |
| Piston ring gap 0.003 in. per each inch in diameter. | |

TECHNICAL DATA 1945-47

| | 1945 350-cc | 1945 500-cc | 1946 350-cc | 1946 500-cc | 1947 350-cc | 1947 500-cc |
|--------------------------------------|--|--------------------------------|----------------|--------------------------------|----------------|--------------------------------|
| Bore, mm | 69 | 82.5 | 69 | 82.5 | 69 | 82.5 |
| Stroke, mm | 93 | 93 | 93 | 93 | 93 | 93 |
| Capacity, cc | 347 | 498 | 347 | 498 | 347 | 498 |
| Compression ratio | 6.35 | 6.0 | 6.35 | 6.0 | 6.35 | 6.0 |
| Valve timing | All models use 0.016 tappet clearance | | | | | |
| Inlet opens B.T.D.C. | 32° | 32° | 32° | 32° | 32° | 32° |
| Inlet closes A.B.D.C. | 63° | 63° | 63° | 63° | 63° | 63° |
| Exhaust opens B.B.D.C. | 65° | 65° | 65° | 65° | 65° | 65° |
| Exhaust closes A.T.D.C. | 30° | 30° | 30° | 30° | 30° | 0° 3 |
| Ignition before T.D.C., full advance | All ¹ / ₂ | | | | | |
| Tappet clearance, engine cold | All models nil clearance | | | | | |
| Carburettor, bore size | Set with piston on T.D.C. firing stroke | | | | | |
| Main jet | 1 | 1 ³ / ₃₂ | 1 | 1 ³ / ₃₂ | 1 | 1 ³ / ₃₂ |
| Slide | 150 | 180 | 150 | 180 | 150 | 180 |
| Needle position | 6/4 | 29/4 | 6/4 | 29.4 | 6/4 | 29/4 |
| Needle jet | 2 | 2 | 2 | 2 | 2 | 2 |
| Needle | 4.061 | 29.076 | 4.061 | 29.076 | 4.061 | 29.076 |
| Cylinder size | 6 | 29 | 6 | 29 | 6 | 29 |
| Tolerance +0.0005 | 2.7187 | 3.250 | 2.7187 | 3.250 | 2.7187 | 3.250 |
| -0.0005 | | | | | | |
| K.L.G. sparking-plug | F80 | F80 | F80 | F80 | F80 | F80 |
| Magneto contact gap | 0.012 | | | | | |
| Gearbox lubricant | 1 ³ / ₄ pints light grease | | | | | |
| Petrol-tank capacity, pints | 24 | | | | | |
| Petrol-tank reserve, pints | 4 | | | | | |
| Oil-tank capacity, pints | 4 | | | | | |
| Top of skirt, piston diameter | All 350 cc 2.7132 | | | | | |
| Top of skirt, mean diameter | All 500 cc 3.2435 | | | | | |
| Bottom of skirt, piston size | All 350 cc 2.7143 | | | | | |
| Bottom of skirt, mean diameter | All 500 cc 3.2446 | | | | | |
| Gudgeon-pin size | -0.0010 | | | | | |
| | ⁷ / ₁₆ -0.0013 | | | | | |
| Connecting-rod length, centres | 7 ³ / ₁₆ (1945-46) | | | | | |
| | 6 ³ / ₁₆ (1947) | | | | | |

(All dimensions are in inches unless otherwise indicated.)

TECHNICAL DATA 1945-47-continued

| | 350-cc and 500-cc models |
|---------------------------------|--|
| Timing-side shaft diameter | $\frac{7}{8}$ -0.0020 -0.0025 |
| Rocker-axle bush | $\frac{5}{8}$ +0.00075 -0.00050 |
| Camshaft bush | $\frac{1}{2}$ +0.0005 -0.0005 |
| Rocker-axle sleeve | High limit 0.6235 Low limit 0.6230 |
| Camshaft axle | -0.00125 -0.00175 |
| Small-end bush | $\frac{7}{8}$ +0.00050 -0.00025 |
| Flywheel end-float | 0.025 maximum With shock absorber spring removed |
| Flywheel diameter | All 350 $7\frac{1}{8}$ x 1.098 All 600 $7\frac{3}{4}$ x 1.156 |
| Balance factor | All 65% |
| Total rotating weight | All 350 843.3 gm. All 500 843.3 gm. |
| Reciprocating weight | All 350 497.4 gm. All 500 673.2 gm. |
| Balance weight | All 350 1 lb. 4 oz. $9\frac{3}{4}$ gm. (one flywheel) All 500 1 lb. 6 oz. $8\frac{1}{2}$ gm. (one flywheel) |
| Exhaust pipe | Best length (open) 48 |
| Wheel base | 53 |
| Head angle | 63° |
| Trail | $2\frac{5}{8}$ |
| Valve spring, free length inner | $1\frac{13}{16}$ |
| Valve spring, free length outer | $2\frac{1}{16}$ |
| Valve lift | $\frac{5}{16}$ |
| Valve-seat angle (all engines) | 45° |
| Push-rod, overall length | All 350 $9\frac{41}{64}$. All 500 $9\frac{5}{32}$ |
| Valve guide (inlet) | $\frac{1}{2}$ |
| Protrusion (exhaust) | $\frac{5}{8}$ |
| Valve stem (inlet) | 0.3730 high limit and 0.3720 low limit |
| Diameter (exhaust) | 0.3715 high limit and 0.3705 low limit |
| Crankpin diameter | 1.20375 high limit and 1.20350 low limit |
| Crank-pin rollers | All 0.250 x 0.0250 (30 off) |
| Connecting-rod sleeve diameter | 1.70400 high limit and 1.70375 low limit |
| Timing-side bush | $\frac{7}{8}$ +0.00075 +0.0 |
| Driving side shaft | 1.0002 high limit and 0.9997 low limit |

(All dimensions are in inches unless otherwise indicated.)

TECHNICAL DATA 1948-60

| | 1948 350-cc | 1948 500-cc | 1949 350-cc | 1949 500-cc | 1950-60 350-cc | 1950-60 500-cc |
|-------------------------------------|---|-----------------|----------------|-----------------|-------------------|-------------------|
| Bore, mm | 69 | 82,5 | 69 | 82,5 | 69 | 82,5 |
| Stroke, mm | 93 | 93 | 93 | 93 | 93 | 93 |
| Capacity, cc | 347 | 498 | 347 | 498 | 347 | 498 |
| Compression ratio | 6.35 | 6.0 | 6.35 | 6.0 | 6,35 | 6.0 |
| Valve timing | All models use 0.016 tappet clearance | | | | | |
| Inlet opens B.T.D.C. | 32° | 32° | 32° | 32° | 32° | 32° |
| Inlet closes A.B.D.C. | 63° | 63° | 63° | 63° | 63° | 63° |
| Exhaust opens B.B.D.C. | 66° | 65° | 65° | 65° | 65° | 65° |
| Exhaust closes A.T.D.C. | 30° | 30° | 30° | 30° | 30° | 30° |
| Ignition before T.D.C, full advance | All $\frac{1}{2}$ | | | | | |
| Tappet clearance, engine cold | All models nil clearance Set with piston on T.D.C. firing stroke | | | | | |
| Carburetter, bore size | 1 | $1\frac{1}{32}$ | 1 | $1\frac{1}{32}$ | 1 | $1\frac{1}{32}$ |
| Main jet | 150 | 180 | 150 | 180 | 150 | 180 |
| Slide | 6/4 | 29/4 | 6/4 | 29/4 | 6/4 | 29/4 |
| Needle position | 2 | 2 | 3 | 2 | 3 | 2 |
| Needle jet | 4.061 | 29.076 | 4.061 | 29.076 | 4.061 | 29.076 |
| Needle | 6 | 29 | 6 | 29 | 6 | 29 |
| Cylinder size | 2.7187 | 3.250 | 2.7187 | 3.250 | 2.7187 | 3.250 |
| Tolerance +0.0005 -0.0005 | | | | | | |
| K.L.G. sparking-plug | F80 | F80 | F80 | F80 | F80 | FE80* |
| Magneto contact gap | 0.012 | | | | | |
| Alternator gap | 0.019-0.016 | | | | | |
| Gearbox lubricant | 1 pint engine oil | | | | | |
| Petrol-tank capacity, pints | 24 | | | | | |
| Petrol-tank reserve, pints | 4 | | | | | |
| Oil-tank capacity, pints | 4 | | | | | |
| Top of skirt, piston diameter | All 350-cc 2.7176 | | | | | |
| Top of skirt, mean diameter | All 500-cc 3.2490 | | | | | |
| Bottom of skirt, piston size | All 350-cc 2.7180 | | | | | |
| Bottom of skirt, mean diameter | All 500-cc 3.2494 | | | | | |
| Gudgeon-pin size | $\frac{7}{8}$ -0.0010 -0.0013 | | | | | |
| Connecting-rod length, centres | 6 $\frac{3}{8}$ (1948-51) | | | | | |

(All dimensions are in inches unless otherwise indicated.)

* Alloy head.

TECHNICAL DATA 1948-60 –continued

| | 1948 350-cc | 1948 500-cc | 1949-51 350-cc | 1949 500-cc | 1950-53 500-cc |
|--------------------------------|-------------------------|---------------------------|--|-------------------------|------------------------------------|
| Timing-side shaft diameter | | All 1948-49 $\frac{7}{8}$ | -0.0020 -0.0025 -0.00150 | | |
| | | All 1950-51 $\frac{7}{8}$ | -0.00175 | | |
| Rocker-axle bush | | $\frac{5}{8}$ | + 0.00075 - 0.00060 | | |
| Camshaft bush | | $\frac{1}{4}$ | + 0.0005 - 0.0005 | | |
| Rocker-axle sleeve | | | High limit 0.6235 Low limit 0.6230 | | |
| Camshaft axle | | $\frac{1}{2}$ | - 0.00125 - 0.00175 | | |
| small-end bush | | $\frac{7}{8}$ | + 0.00050 - 0.00025 | | |
| Flywheel end float | | | 0.025 maximum | | |
| Flywheel diameter | | | With shock absorber spring remove All engines (after 8000) $7\frac{3}{4}$ x 1.156 | | |
| Balance factor | | | 65% | | |
| Total rotating weight | | | All 350 843.3 gm. All 500 843.3 gm. | | |
| Reciprocating weight | | | All 350 497.4 gm. All 500 673.2 gm. | | |
| Balance weight | | | All 350 1 lb. 4 oz. $9\frac{3}{4}$ gm. (one flywheel) All 500 1 lb. 6 oz. $8\frac{1}{4}$ gm. (one flywheel) | | |
| Exhaust pipe | | | Best length (open) 48 | | |
| Wheel base | 63 | 53 | 54 | 54 | 54 |
| Head angle | $63\frac{1}{4}^{\circ}$ | $63\frac{1}{4}^{\circ}$ | $63\frac{1}{4}^{\circ}$ | $63\frac{1}{4}^{\circ}$ | $63\frac{1}{4}^{\circ}$ |
| Trail | $2\frac{5}{8}$ | $2\frac{5}{8}$ | $2\frac{5}{8}$ | $2\frac{5}{8}$ | $2\frac{5}{8}$ |
| Valve spring, free length | 2 | 2 | 2 | 2 | 2 |
| inner | | | | | |
| Valve spring, free length | $2\frac{13}{64}$ | $2\frac{13}{64}$ | — | — | — |
| outer | | | | | |
| Valve lift | $\frac{5}{16}$ | $\frac{5}{16}$ | $\frac{5}{16}$ | $\frac{5}{16}$ | $\frac{5}{16}$ |
| Valve-seat angle (all engines) | 45° | 45° | 45° | 45° | 45° |
| Push-rod, overall length | $9\frac{41}{64}$ | $9\frac{5}{32}$ | $9\frac{9}{32}$ | $9\frac{9}{32}$ | $9\frac{5}{32}$ |
| Valve guide (Net) | $\frac{1}{4}$ | $\frac{1}{2}$ | $\frac{1}{2}$ | $\frac{1}{2}$ | $\frac{1}{2}$ |
| protrusion (exhaust) | $\frac{9}{16}$ | $\frac{9}{16}$ | $\frac{9}{16}$ | $\frac{9}{16}$ | $\frac{9}{16}$ |
| Valve stem dia. (inlet) | | | | | |
| " " (exhaust) | | | | | |
| Crank-pin diameter | | | | | |
| Crank-pin rollers | | | | | |
| Connecting-rod sleeve diameter | | | | | |
| Timing-side bush | | | All 1948-49 $\frac{7}{8}$ | + 0.00075 + 0.0 | |
| | | | All 1950-51 $\frac{7}{8}$ | + 0.0005 + 0.0000 | |
| Driving-side shaft | | | | | 1.0002 high limit 0.9998 low limit |

(All dimensions are in inches unless otherwise indicated.)

TECHNICAL DATA 1954-60

| | 350-cc and 500-cc models | |
|--------------------------------|--|-----------------------------------|
| Timing-side shaft diameter | 1.2275-1.2300 | |
| Rocker-axle bush | $\frac{5}{8}$ + 0.00075 - 0.00050 | |
| Camshaft bush | $\frac{1}{2}$ + 0.0005 - 0.0005 | |
| Rocker-axle sleeve | High limit 0.6235 Low limit 0.6230 | |
| Camshaft axle | $\frac{3}{8}$ - 0.00125 - 0.00175 | |
| Small-end bush | $\frac{7}{8}$ + 0.00050 - 0.00025 | |
| Flywheel end float | 0.025 maximum | |
| Flywheel diameter | With shock absorber spring removed All engines (after 8000) $7\frac{3}{4}$ x 1.156 | |
| Balance factor | All 65% | |
| Total rotating weight | All 350 843.3 gm. All 500 843.3 gm. | |
| Reciprocating weight | All 350 497.4 gm. All 500 673.2 gm. | |
| Balance weight | All 350 1 lb. 4 oz. $9\frac{3}{4}$ gm. (one flywheel) All 500 1 lb. 6 oz. $8\frac{1}{4}$ gm. (one flywheel) | |
| Exhaust pipe | Best length (open) 48 | |
| Wheel base | 54 | |
| Head angle | 500-cc $63\frac{1}{4}^{\circ}$ | 350-cc $63\frac{1}{4}^{\circ}$ |
| Trail | $2\frac{5}{8}$ | $2\frac{5}{8}$ |
| Valve spring, free length | $3\frac{1}{8}$ | $2\frac{5}{8}$ |
| narrow | 2 | 2 |
| Valve spring, free length | | |
| wide | 2 | 2 |
| Valve lift | $\frac{5}{16}$ | $\frac{5}{16}$ |
| Valve-seat angle (all engines) | 45° | 45° |
| Push-rod, overall length | $9\frac{5}{32}$ | $9\frac{9}{32}$ |
| Valve guide (inlet) | $\frac{1}{2}$ | $\frac{1}{2}$ |
| protrusion (exhaust) | $\frac{1}{2}$ | $\frac{1}{2}$ |
| Valve stem dia. (inlet) | 0.3730 high limit and 0.3720 low limit | |
| (exhaust) | 0.3715 high limit and 0.3705 low limit | |
| Crankpin diameter | 1.20375 high limit and 1.20350 low limit | |
| Crankpin rollers | 0.250 x 0.0250 (30 off) | |
| Connecting-rod sleeve diameter | 1.70400 high limit and 1.70375 low limit | |
| Timing-side bush | 1.125-1.1255 | |
| Driving-side shaft | 1.0002 high limit and 0.9997 low limit | |

(All dimensions are in inches unless otherwise indicated.)

GEAR RATIOS—347 c.c. AND 498 c.c. MODELS

| ENGINE SPROCKET | 1st | 2nd | 3rd | Top | INTERNAL RATIOS |
|-----------------|-------|-------|------|------|---|
| 15 teeth | 18.69 | 12.32 | 8.96 | 7.0 | 1st 2.67 2nd 1.76 3rd 1.28 Top 1—1 |
| 16 teeth | 17.5 | 11.54 | 8.39 | 6.56 | |
| 17 teeth | 16.44 | 10.48 | 7.88 | 6.16 | |
| *18 teeth | 15.57 | 10.26 | 7.47 | 5.83 | |
| 19 teeth | 14.6 | 9.6 | 7.0 | 5.49 | |
| 20 teeth | 14.01 | 9.24 | 6.72 | 5.25 | |
| †21 teeth | 13.35 | 8.8 | 6.4 | 5.0 | |

* Standard 350 c.c. † Standard 500 c.c.

GEAR RATIOS—COMPETITION MODELS

| ENGINE SPROCKET | 1st | 2nd | 3rd | Top | INTERNAL RATIOS |
|-----------------|-------|-------|------|------|---|
| 15 teeth | 22.12 | 14.63 | 8.96 | 7.0 | 1st 3.16 2nd 2.09 3rd 1.28 Top 1—1 |
| *16 teeth | 20.72 | 13.71 | 8.39 | 6.56 | |
| 17 teeth | 19.46 | 12.87 | 7.88 | 6.16 | |
| †18 teeth | 18.44 | 12.20 | 7.47 | 5.83 | |
| 19 teeth | 17.34 | 11.47 | 7.0 | 5.49 | |
| 20 teeth | 16.59 | 10.97 | 6.72 | 5.25 | |
| 21 teeth | 15.8 | 10.45 | 6.4 | 5.0 | |

* Standard 350 c.c. † Standard 500 c.c.

CARBURETTORS

The various types of Amal carburettors fitted are given below:

347 c.c. Models

| YEAR | TYPE | BORE SIZE | SLIDE | NEEDLE POSITION | MAIN JET |
|---------|-----------|-----------|-----------|-----------------|----------|
| 1946-50 | 76DIJ | 1 in. | 6 x 4 | 2 | 150 |
| 1951-53 | 76/AE/IAK | 1 in. | 6 x 4 | 2 | 150 |
| 1954 | 76AV/IED | 1.063 in. | 6 x 4 | 2 | 150 |
| 1955 | 376/5 | 1.063 in. | 376/060.3 | 3 | 210 |

498 c.c. Models

| YEAR | TYPE | BORE SIZE | MAIN JET | SLIDE | NEEDLE POSITION |
|---------|---------|-----------|----------|-----------|-----------------|
| 1946-53 | 89B/IAK | 1.097 in. | 180 | 29/4 | 3 |
| 1954 | 89NIED | 1.161 in. | 180 | 29/4 | 2 |
| 1955 | 389/1 | 1.161 in. | 260 | 389/060.3 | 3 |

ENGINE DESIGN CHANGES

1947 Models

- (1) Improved type oil-pump plunger (two-start type) with new timing-side axle (identified by 2S stamped on plunger).
- (2) Oil-feed passage in timing-side half crankcase increased to $\frac{3}{32}$ -in. diameter to prevent cavitation, with corresponding increase in diameter of the oil pipe, ($\frac{3}{16}$ -in. diameter).
- (3) A two piece oil pump guide pin $\frac{3}{16}$ -in. in diameter to prevent wear on the pin due to the increased plunger speed.
- (4) Shorter connecting-rod.
- (5) The use of a long plain bush for the timing-side bearing; the small roller bearing is now obsolete. Engines fitted with the old-type bearing can use a modified bush with two external diameters. The steel sleeve is retained to locate the new bush on the large external diameter.

1948 Models

- (1) Annular groove in pump plunger increased from $\frac{3}{16}$ to $\frac{1}{4}$ -in. diameter with suitable guide pin.
- (2) Wire-wound pistons fitted to 500-cc models.
- (3) 500-cc type high crankcase used for 350-cc models after engine number 8000.
- (4) 500-cc flywheels used for the 350-cc model.
- (5) Larger brakes (7-in. diameter).

1949 Models

- (1) New-type cylinder-head, with hair-pin valve springs with rocker box to suit
- (2) Valve lifter transferred from crankcase to rocker box.
- (3) Wire-wound pistons for all models.
- (4) Longer valves, hardened valve end caps discarded.
- (5) New rockers for longer valves, also new valve guides.

1950 Models

- (1) Alloy cylinder-heads and barrels used on Competition models only. Steel crankpin washer in place of bronze type.

1951 Models

- (1) Alloy cylinder-heads used on both touring-type engines. Crankpin washers discarded, flywheels altered.

1952 Models

- (1) Open-tray valve-spring seat, prongs for valve springs increased in length.
- (2) Cylinder barrel lengthened $\frac{1}{8}$ -in. on 500-cc touring engine, compression plate discarded.
- (3) Recess for driving-side bearings in crankcase with two diameters, for close and easy interference fit to avoid "end loading" of these bearings.
- (4) Top compression ring chrome-plated.

ENGINE DESIGN CHANGES – continued

| |
|--|
| 1953 Models No change. |
| 1954 Models (1) Oil feed in rocker box modified to increase oil supply to rocker end of inlet valve and stop valve-spring wear. (2) New rockers for valve ends with groove in side for oil duct (3) High-lift cams. (4) Larger-diameter timing-side shaft, with flywheel to suit. (5) Two-diameter timing-side bush, steel sleeve discarded. (6) Automatic ignition control on 500-cc model |
| 1955 Models (1) New crankcase to use one small and one large driving-side bearing. (2) New driving-side flywheel (keyways at 180°). (3) Circlip fitted to exhaust-valve guide. |
| 1956 Models (1) Cylinder-wall oil feed discontinued. (2) Compression ratio increased to 7.5 for 350-cc models, 7.3 for 500-cc models. (3) Oil-tank felt filter deleted and magnetic filter fitted in crankcase. |
| 1957 Models (1) Engine-shaft shock absorber discarded, shock absorber incorporated in the clutch assembly. (2) A.M.C. gearbox on all models. (3) Improved detachable rear-wheel design. (4) Girling rear suspension units introduced. |
| 1958-60 Models (1) Lucas RM 15 Alternator A.C. lighting/ignition used on 350 cc and 500-cc models. (2) Aluminium front chaincase replaces steel type. |

Front Forks

Longer Fork Springs (free length 12¾ in.) can be used in place of earlier types, which were 9.997 in. and 11 in. free length. The longer springs improve the fork motion, but will expose the holes in the slider extension first used in 1954. Buffer springs for fork inner tubes can be used on models before 1947.

1948 Top Fork Cover Tubes with incorporated lamp brackets will interchange with the earlier type to discard the strip-steel lamp brackets.

Polished Fork Sliders, in place of the black-enamelled type, can be fitted without other alteration.

A 1956-type Front Mudguard, which dispenses with the two strip-steel stays, will fit any machine fitted with Teledraulic forks made before 1956. Front forks with large-diameter tubes (1955-57) can be fitted to earlier models.

PERMISSIBLE FRAME MODIFICATIONS – continued

Rear Suspension

"Jam-pot" Units, first used in 1951, can be adapted for 1950 models if the top anchorage on the frame loop is cut away to clear the unit top pivot.

Front Chaincase

The outer portion of the chaincase with a detachable clutch cover for clutch adjustment, without disturbing the chaincase, first used in 1954, can be fitted to earlier models.

Full-width Hubs

The full-width front hub can be fitted to any model which has Teledraulic forks.
Rear-wheel hubs of the same type can also be fitted to any spring-frame model.

Spring Frame

Rigid-frame models made from 1949 can be converted into spring frame models.

TECHNICAL DATA FOR EX-W.D. 350 cc MODEL 41-G3L

Cubic capacity 347 c.c.
Stroke 93 mm, (3.6614 in.)
Cylinder bore 2.7187 in. ±0.0005 in.
Compression ratio 5.88 : 1 with plate
6.30 : 1 without plate

AXLES
Camshaft axle diameter ½ in. – 0.00125/0.00175 in.

Driving flywheel axle diameter 1 in. ±0.0002 in.

Gearbox mainshaft length 10¼ in.
Timing side flywheel axle diameter ⅞ in. – 0.0030/0.0035 in.

Nut retaining small timing pinion to flywheel axle 0.7 in. x 26 tpi, left-hand thread. Flywheel axle run to 0.001 in. from dead true.

BALL JOURNAL BEARINGS

Driving side flywheel axle ball bearings Bore 1 x 2¼ in. O/D by ⅝ in.
Gearbox main gear ball bearing Bore 1.281 in. x 62 mm, O/D by 16 mm.

Gearbox mainshaft (right-hand end) ball bearing. Bore 12 x 40 mm. O/D x 17 mm.
Steering head 0.187 in. balls (56 off)

EX-WD G3L DATA – continued**BIG-END BEARING**

Crankpin diameter on roller race
1.20325/1.20350 in.
Crankpin diameter in flywheel
0.8775/0.8780 in.
Crankpin rollers diameter $\frac{1}{4}$ x $\frac{1}{4}$ in.
(30 off)
Big-end liner external diameter
2.0000/2.0005 in.
Big-end liner internal diameter
1.70375/1.70400 in. (fitted and ground)

BUSHES (FITTED AND REAMED)

Camshaft bushes $\frac{1}{2}$ in. ± 0.0005 in.
Gudgeon pin bush $\frac{7}{8}$ in. $+0.0005$ in.
-0.00025 in.
Rocker bushes $\frac{5}{8}$ in. $+0.001$ in.
-0.000 in.
Timing axle bush $\frac{7}{8}$ in. $+0.00125$ in.
-0.00150 in.

CAPACITIES (OIL OR GREASE)

Front forks $6\frac{1}{2}$ fluid oz. S.A.E.20
Gearbox $1\frac{3}{4}$ pts. light grease
Oil tank 3 pts.
Petrol tank 3 gallons

CARBURETTER

Carburetter Amal, type 275 F/1J.
(W.D. type)
Main jet size 120
Throttle valve size 5 x 5
Jet taper needle Early models 3rd,
later models 4th notch.

CHAINS

Front $\frac{1}{2}$ x 0.305 in. (66 links)
Rear $\frac{5}{8}$ x 0.380 in. (91 links)
Magnet $\frac{3}{8}$ x 0.225 in. (58 links)
Dynamo $\frac{3}{8}$ x 0.225 in. (47 links)
(Whip-front, $\frac{3}{8}$ in.; rear, $\frac{3}{8}$ in. to $\frac{1}{2}$ in.;
magnet $\frac{1}{4}$ in.; dynamo, $\frac{1}{4}$ in.)

CLUTCH

Thrust rod $9\frac{7}{8}$ in.
Gear ratios 5.8, 7.5, 12.2 and 18.5 : 1
Gudgeon pin diameter
 $\frac{7}{8}$ in. -0.0010/0.0015 in.

IGNITION

Contact breaker points 0.012 in.
Setting, b.t.d.c., fully advanced
0.438 in. (max. $\frac{1}{2}$ in.)
Plug gap 0.020/0.022 in.

PISTON

Top land 2.6877 in. ± 0.0005 in.
2nd land 2.6962 in. ± 0.0005 in.
3rd land 2.6962 in. ± 0.0005 in.
Top of skirt 2.7132 in. ± 0.0005 in.
Bottom of skirt 2.7143 in. ± 0.0005 in.
(Measurements at right angles to
gudgeon pin)

PISTON RINGS

Compression 2.719 x 0.0625 in.
Scraper 2.719 x 0.125 in.
Gap Normal, 0.006/0.008 in. (max.
0.030 in.)
Ring clearance 0.003 in.
Rocker sleeve diameter
0.6230/0.6235 in.

SPROCKETS

Clutch 40 teeth ($\frac{1}{2}$ x 0.305 in. chain)
Engine 18 teeth ($\frac{1}{2}$ x 0.305 in. chain)
Gearbox 16 teeth ($\frac{5}{8}$ x 0.380 in. chain)
Rear wheel 42 teeth ($\frac{5}{8}$ x 0.380 in.
chain)

TAPPET GUIDES

Projection from crankcase face
0.281 in.

VALVE TIMING

Exhaust opens 65° b.b.d.c.; closes 30°
a.t.d.c.
Inlet (engines before No. 54512)
opens 20° b.t.d.c.; closes 67° a.b.d.c.
Inlet (engines after No. 54512) opens
32° b.t.d.c.; closes 63° a.b.d.c.
(All timings with 0.016 in. tapped
clearance.)

VALVES

Clearance (cold engine) nil
Head diameter inlet 1.864 in. ± 0.005
in.; exhaust 1.5 in. ± 0.005 in.
Seat angle 45°
Stem diameter, inlet and exhaust
0.375 in. -0.0034/0.0045 in.

VALVE GUIDES

External diameter
 $\frac{5}{8}$ in. $+0.00175/0.00225$ in.
Internal diameter $\frac{3}{8}$ in. ± 0.0005 in.
Projection from cylinder head Inlet
 $\frac{1}{2}$ in.; exhaust $\frac{5}{8}$ in.

VALVE SPRINGS

Outer valve spring free length
2.0625 in.
Inner valve spring free length
1.812 in.
(Replace springs when 0.1875 to 0.25
in. below these lengths)

SPARES LIST

for

G3L MATCHLESS

MOTOR CYCLES

(With War Office Modifications)

Compiled and Issued by the Manufacturers:

MATCHLESS MOTOR CYCLES

(Proprietors: ASSOCIATED MOTOR CYCLES LIMITED)

Registered Offices:

PLUMSTEAD RD., PLUMSTEAD, LONDON, S.E.18
ENGLAND

Nearest Station

WOOLWICH ARSENAL
SOUTHERN RAILWAY

Factories:


BURRAGE GROVE & MAXEY-ROAD
PLUMSTEAD, S.E.18

Telegrams and Cables—"Matchless, Wol-London"

Telephone-Woolwich 1233 (5 lines)

Codes— $\left\{ \begin{array}{l} A.B.C. 5th \text{ and } 6th \text{ Edition} \\ Beniley's \\ \text{and Private Code} \end{array} \right.$

All Correspondence to Offices: PLUMSTEAD ROAD, LONDON, S.E.18

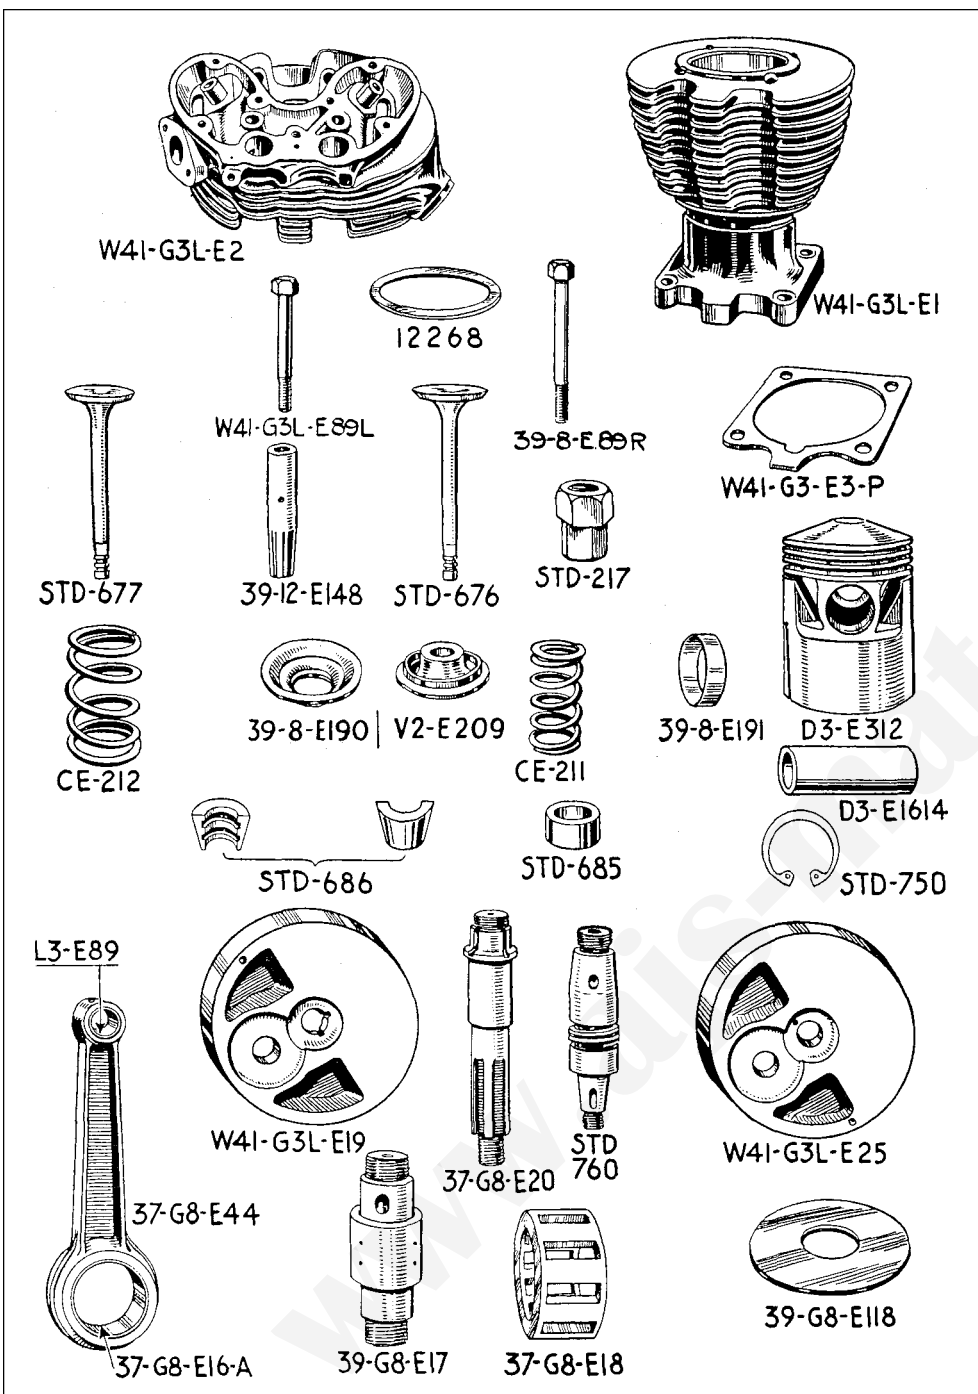


ENGINE SECTION.


| Description. | Qty. | Price Each. | | | Part Number. |
|--|------|-------------|-----|-----|----------------|
| | | £ | s. | d. | |
| CYLINDER. | | | | | |
| Cylinder barrel | 1 | ... | ... | ... | W41-G3L-E1 |
| Paper washer, for cylinder base and Compression plate | 2 | ... | ... | ... | 37-8-E3 |
| Nut, retaining cylinder to crankcase | 4 | ... | ... | ... | STD-217 |
| Compression plate | 1 | ... | ... | ... | W41-G3-E3-P |
| CYLINDER HEAD. | | | | | |
| Cylinder head, less valve guides | 1 | ... | ... | ... | W41-G3L-E2 |
| Cylinder head, with valve guides | 1 | ... | ... | ... | W41-G3L-E2-ASS |
| Gasket, for cylinder head | 1 | ... | ... | ... | 12268 |
| Bolt, securing head to barrel, left (short) | 2 | ... | ... | ... | W41-G3L-E89-L |
| Bolt, securing head to barrel, right (long) | 2 | ... | ... | ... | 39-8-ES9-R |
| Washer, for head fixing bolt | 4 | ... | ... | ... | STD-10 |
| Stud, fixing carburetter | 2 | ... | ... | ... | 37-8-E161 |
| Nut, for carburetter stud | 2 | ... | ... | ... | STD-4 |
| ENGINE VALVES. | | | | | |
| Inlet valve | 1 | ... | ... | ... | STD-676 |
| Exhaust valve | 1 | ... | ... | ... | STD-677 |
| Guide, for valve (inlet or exhaust) | 2 | ... | ... | ... | 39-12-E148 |
| Spring, inner, for valve | 2 | ... | ... | ... | CE-211 |
| Spring, outer, for valve | 2 | ... | ... | ... | CE-212 |
| Collar, for valve springs | 2 | ... | ... | ... | V2-E209 |
| Cup, for valve springs | 2 | ... | ... | ... | 39-8-E190 |
| Distance sleeve, for valve spring cup | 1 | ... | ... | ... | 39-8-E191 |
| Collet, for valve (each in two pieces) | 2 | ... | ... | ... | STD-686 |
| Cap (or thimble), for valve stem | 2 | ... | ... | ... | STD-685 |
| The Distance Sleeve DF-39-8-E191 is only fitted on the exhaust valve assembly. | | | | | |
| PISTON. | | | | | |
| Piston, bare | 1 | ... | ... | ... | D3-E312 |
| Ring, compression, for piston 69 mm. by 16 in. | 2 | ... | ... | ... | D3-E311 |
| Ring, scraper, for piston 69 mm. by 8 in. | 1 | ... | ... | ... | 38-G3-E111 |
| Gudgeon pin, for piston | 1 | ... | ... | ... | D3-E1614 |
| Circlip, for gudgeon pin | 2 | ... | ... | ... | STD-750 |
| Piston, complete with gudgeon pin and rings | 1 | ... | ... | ... | D3-E312-A |
| THE FOLLOWING OVERSIZE PARTS CAN BE SUPPLIED | | | | | |
| All are .020 in. oversize | | | | | |
| Piston, bare, oversize | 1 | ... | ... | ... | O/D3-E312 |
| Ring, compression, oversize | 2 | ... | ... | ... | O/D3-E311 |
| Ring scraper, oversize | 1 | ... | ... | ... | O/38-G3-E111 |
| Piston, complete, oversize | 1 | ... | ... | ... | O/D3-E312-A |
| FLYWHEELS. | | | | | |
| Flywheel, bare, timing side | 1 | ... | ... | ... | W41-G3L-E25 |
| Flywheel, bare, driving side | 1 | ... | ... | ... | W41-G3L-E19 |
| Axle, for timing side flywheel | 1 | ... | ... | ... | STD-760 |
| Axle, for driving side flywheel | 1 | ... | ... | ... | 37-G8-E20 |
| Key, for driving side axle | 2 | ... | ... | ... | STD-573 |
| Nut, for timing side axle | 1 | ... | ... | ... | STD-230 |
| Nut, for driving side axle | 1 | ... | ... | ... | STD-234 |
| Lock screw, for timing side axle nut | 1 | ... | ... | ... | STD-15 |
| CONNECTING ROD. | | | | | |
| Connecting rod, with liner and bush | 1 | ... | ... | ... | 37-G8-E44 |
| Liner, only, for big end bearing | 1 | ... | ... | ... | 37-G8-E16-A |
| Bush only, for gudgeon pin | 1 | ... | ... | ... | L3-E89 |
| Roller, for crankpin | 30 | ... | ... | ... | STD-75 |
| Cage, for crankpin rollers | 1 | ... | ... | ... | 37-G8-E18 |
| Crankpin 1 in. diameter shaft | 1 | ... | ... | ... | 39-G8-E17 |
| Washer, for crankpin | 2 | ... | ... | ... | 39-G8-E118 |
| Nut, for crankpin | 2 | ... | ... | ... | STD-233 |

OVERSIZE CRANKPIN ROLLERS, .001 in. OVERSIZE CAN BE SUPPLIED.

The Part Number is O/STD-75

| Description. | Qty. | Price each. | Part Number. |
|--|------|----------------|-----------------|
| £ s. d. | | | |
| CRANKCASE. | | | |
| Crankcase, complete, Khaki-green | 1 | ... | W-41-G3-E108 |
| Crankcase, driving side only | 1 | ... | 37-8-E30 |
| Crankcase, timing side only | 1 | ... | 41-G3-E31 |
| "CRANKCASE COMPLETE" includes all bronze bushes and the cylinder base studs, but does not include timing gear and magneto chain covers. | | | |
| HALVES OF CRANKCASES must be matched in the factory. Therefore, it is necessary to send the sound half of the crankcase when ordering a new half. | | | |
| Drain plug, for crankcase | 1 | ... | STD-575 |
| Plug screw, for crankcase oil holes | 3 | ... | STD-485 |
| Fibre washer, for oil hole screws | 3 | ... | STD-203 |
| Timing gear cover, with bushes, Khaki-green | 1 | ... | 35-G3-E32 |
| Paper washer, for timing gear cover | 1 | ... | 37-8-E78 |
| Dowel peg, locating timing gear cover | 1 | ... | STD-577 |
| Screw, fixing timing gear cover | 5 | ... | STD-482 |
| Magneto chaincase cover, Khaki-green | 1 | ... | W41-G3L-E29 |
| Screw, fixing magneto chaincase cover | 6 | ... | STD-484 |
| Grease nipple, for magneto chaincase cover | 1 | ... | STD-51 |
| Cap, in timing gear cover, for cam bush | 1 | ... | STD-765 |
| Stud, for cylinder base | 4 | ... | STD-300 |
| Ball, for cylinder oil feed valve | 1 | ... | STD-21 |
| Plug, for cylinder oil feed valve | 1 | ... | STD-576 |
| Spring, for cylinder oil feed valve | 1 | ... | STD-701 |
| CRANKCASE BEARINGS. | | | |
| Bush, for timing side flywheel axle | 1 | ... | 41-G3-E27 |
| Rollers and cage, for timing side axle | 1 | ... | 137 |
| Sleeve, for timing side roller bearing | 1 | ... | 41-G3-E541 |
| Ball bearing, for driving side flywheel axle | 2 | ... | RLS-8 |
| Spacing washer, between ball bearings | 1 | ... | 16866 |
| Spacing collar, between ball bearings | 1 | ... | 16889-A |
| Bush for inlet cam, in crankcase | 1 | ... | STD-651 |
| Bush for inlet cam, in timing cover | 1 | ... | STD-652 |
| Bush for exhaust cam, in crankcase | 1 | ... | STD-651 |
| Bush for exhaust cam, in timing cover | 1 | ... | STD-651 |
| Dimensions of UF-RLS-8 Bearing : 1 in. by 2 1/4 in. by 5/8 in. | | | |
| Dimensions of R-137 rollers and cage : 7/8 in. by 1 3/8 in. by 3/8 in. | | | |
| CRANKCASE BOLTS. | | | |
| Front bolt, top position, 4 3/8 in. by 5/8 in. | 1 | ... | STD-278 |
| Front bolt, centre position, 4 3/8 in. by 5/8 in. | 1 | ... | STD-278 |
| Front bolt, bottom position, 3 3/8 in. by 5/8 in. | 1 | ... | STD-273 |
| Bottom bolt, rear position, 4 3/8 in. by 1/2 in. | 1 | ... | STD-261 |
| Rear bolt, top position, 3 3/8 in. by 5/8 in. | 1 | ... | STD-274 |
| Rear bolt, centre position, 3 3/8 in. by 5/8 in. | 1 | ... | STD-274 |
| Rear bolt, bottom position, 3 3/8 in. by 5/8 in. | 1 | ... | STD-274 |
| Spacer for front top bolt | 2 | ... | 40-G3-F66 |
| Spacer for front centre bolt | 2 | ... | 40-G3-F66 |
| Washer for front top bolt | 2 | ... | STD-11 |
| Washer for front centre bolt | 2 | ... | STD-11 |
| Nut, for bottom rear bolt | 2 | ... | STD-5 |
| Nut, for all front and rear bolts | 12 | ... | STD-4 |
| For the bottom, front, bolt that passes through the crankcase, the bottom of the main frame front down tube and the front ends of the rear frame assembly, and the spacing tubes, washers and nuts on it, see FRAME SECTION. | | | |
| OIL PUMP. | | | |
| Plunger, for oil pump | 1 | ... | STD-770 |
| Guide screw, for oil pump plunger | 1 | ... | 38-12-E96 |
| Front end cap, for oil pump, Khaki-green | 1 | ... | STD-773 |
| Rear end cap, for oil pump, Khaki-green | 1 | ... | STD-772 |
| Paper washer, for pump end caps | 2 | ... | STD-582 |
| Screw, fixing front end cap | 4 | ... | STD-15 |
| Bolt, fixing rear end cap | 4 | ... | STD-591 |
| RELEASE VALVE. | | | |
| Release valve body | 1 | ... | STD-836 |
| Diaphragm, for release valve body | 1 | ... | STD-835 |
| TIMING GEAR. | | | |
| Inlet camshaft | 1 | ... | D8-E2932 |
| Exhaust camshaft | 1 | ... | D8-E2931 |
| Timing pinion, on flywheel axle | 1 | ... | R4-E1028 |
| Key, for timing pinion | 1 | ... | STD-570 |
| Nut, retaining timing pinion to axle | 1 | ... | STD-221 |
| TAPPETS. | | | |
| Inlet tappet, bare | 1 | ... | STD-670-A |
| Exhaust tappet, bare | 1 | ... | STD-671-A |
| Collar, for exhaust tappet | 1 | ... | STD-638 |
| Guide, for inlet tappet | 1 | ... | STD-661 |
| Guide for exhaust tappet | 1 | ... | STD-662 |
| Fibre washer, for tappet guides | 2 | ... | 35-12-E73 |

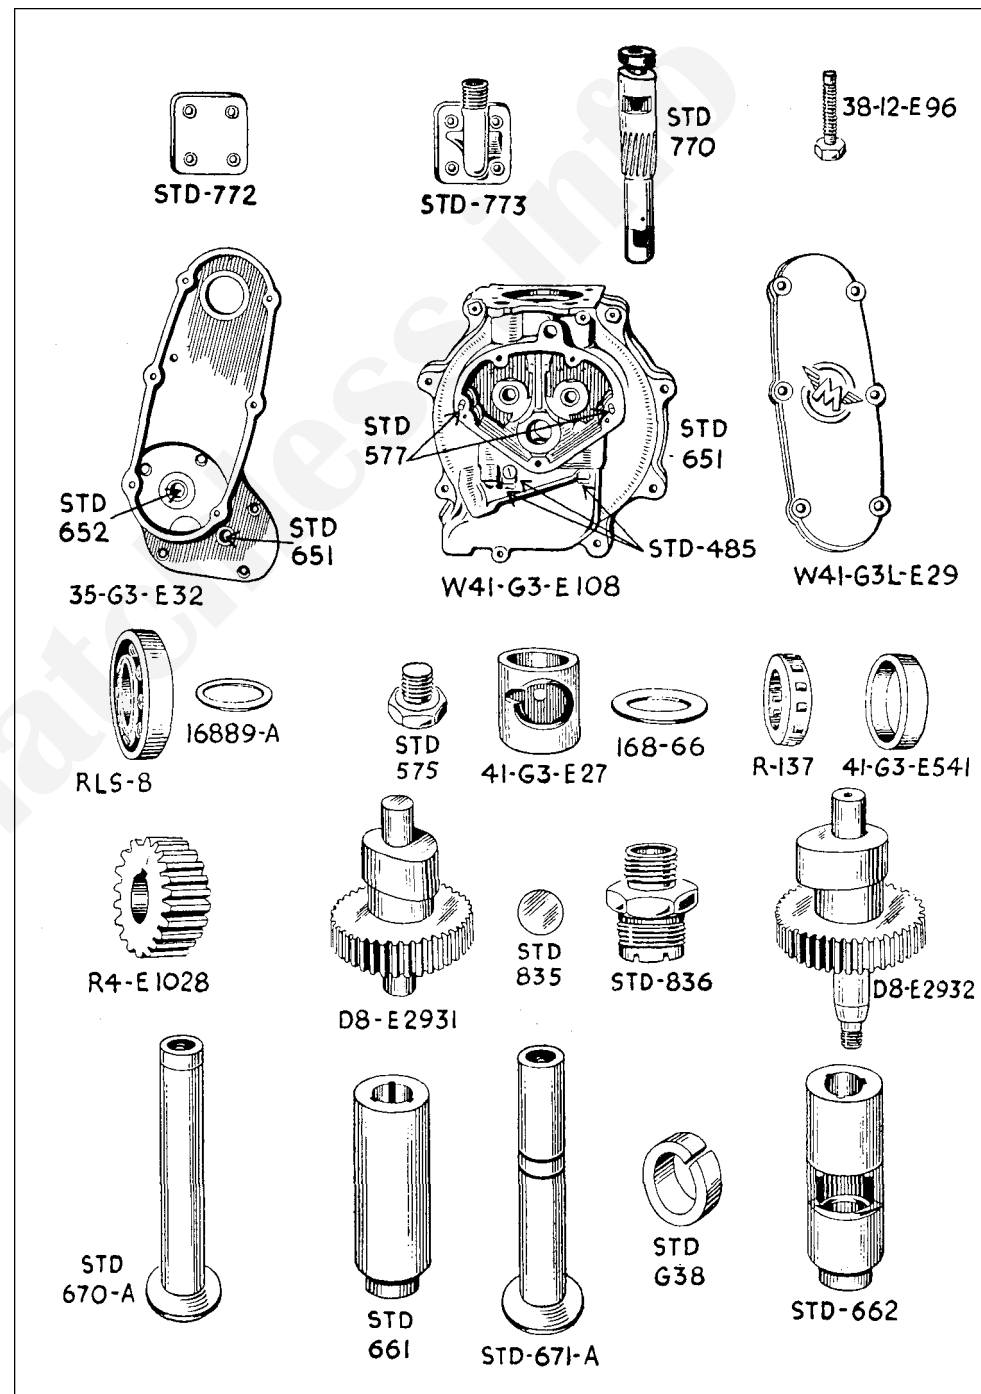

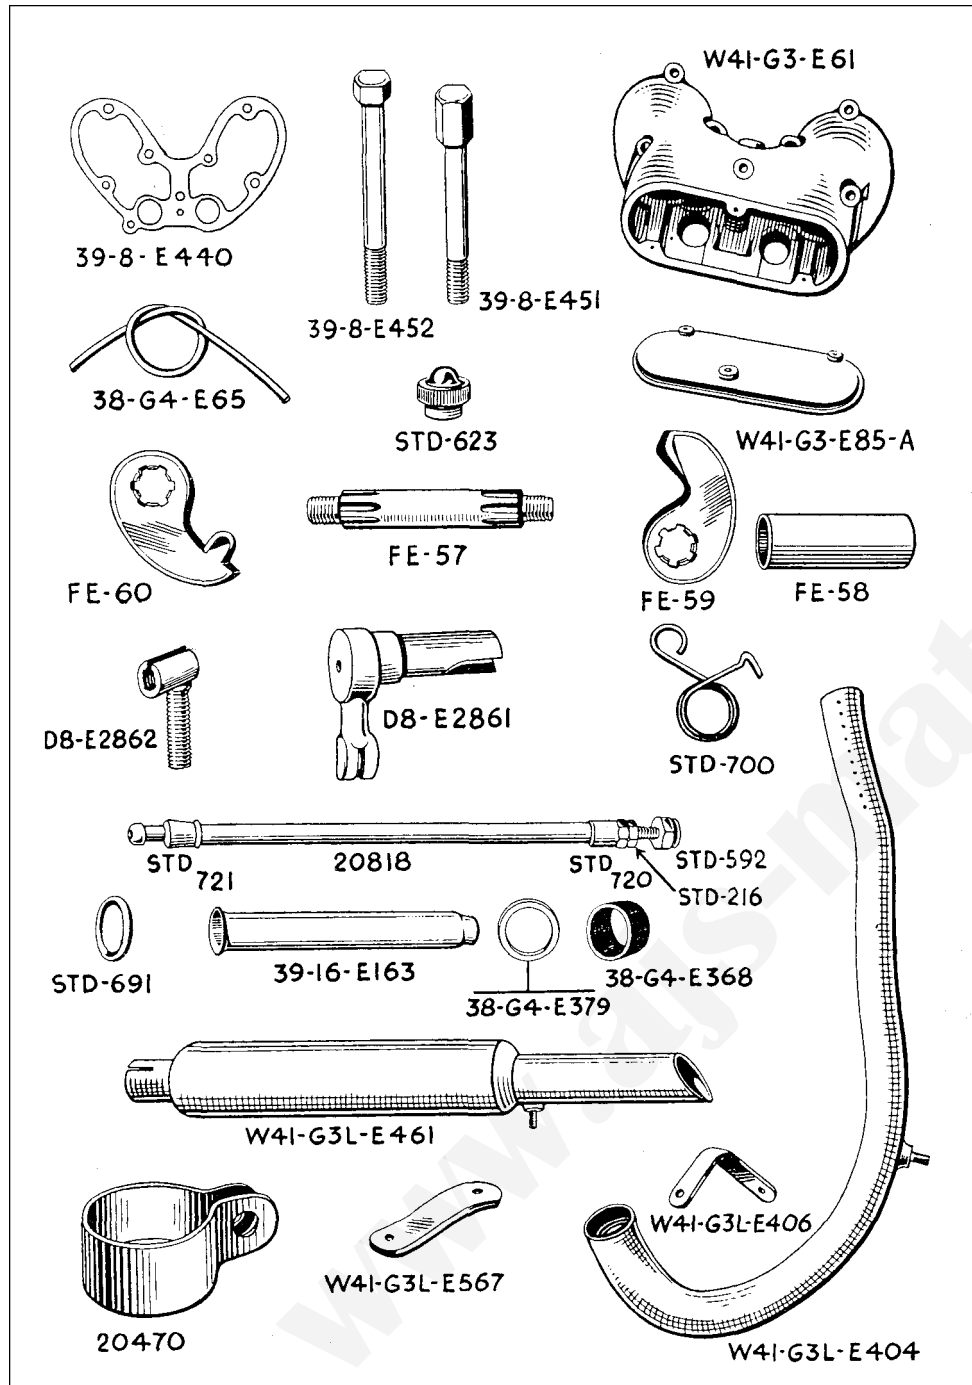

| Description. | Qty. | Price Each. | Part Number. |
|--------------|------|-------------|--------------|
| | | £ s. d. | |

PUSH RODS.

| | | | |
|--|---|-----|---------|
| Long push rod, bare | 2 | ... | 20818 |
| Ball end (bottom), for long push rod | 2 | ... | STD-721 |
| Sleeve end (top), for top of long push rod | 2 | ... | STD-720 |
| Adjusting screw, for top of long push rod | 2 | ... | STD-592 |
| Lock nut, for push rod adjusting screw | 2 | ... | STD-216 |
| Long push rod, complete | 2 | ... | 20818-1 |

PUSH ROD COVER TUBES.

| | | | |
|--|---|-----|------------|
| Cover tube, for long push rod | 2 | ... | 39-16-E163 |
| Gasket, for top of cover tube | 2 | ... | 38-G4-E368 |
| Washer, for top of gasket | 2 | ... | 38-G4-E379 |
| Rubber gland, for bottom of cover tube | 2 | ... | STD-691 |

ROCKER BOX.

| | | | |
|---|---|-----|-----------------|
| Rocker box, assembled with all fittings | 1 | ... | W41-G3-E61-ASS. |
| Rocker box, bare, Khaki-green | 1 | ... | W41-G3-E61 |
| Bolt, fixing box, short head | 1 | ... | 39-8-E452 |
| Bolt, fixing box, long head | 6 | ... | 39-8-E451 |
| Washer, for box fixing bolt | 7 | ... | STD-11 |
| Side cover, for rocker box, Khaki-green | 1 | ... | W41-G3-E85-A |
| Rubber fillet, for side cover | 1 | ... | 38-G4-E65 |
| Stud, fixing side cover | 3 | ... | STD-251 |
| Nut, for side cover stud, Khaki-green | 3 | ... | STD-623 |
| Fibre washer, for cover stud nut | 3 | ... | STD-205 |
| Gasket, for rocker box | 1 | ... | 39-8-E440 |
| Bush, for rocker box | 4 | ... | 38-G4-E204 |

The Rocker Box bare does not include the four bushes.

OVERHEAD ROCKERS.

| | | | |
|---|---|-----|----------|
| Rocker axle | 2 | ... | FE-57 |
| Felt ring, for rocker axle | 2 | ... | D8-E1865 |
| Nut, for rocker axle | 4 | ... | STD-3 |
| Sleeve, for rocker axle | 2 | ... | FE-58 |
| Washer, for rocker axle | 4 | ... | STD-10 |
| Rocker arm, valve end (inlet or exhaust) | 2 | ... | FE-59 |
| Rocker arm, push rod end (inlet or exhaust) | 2 | ... | FE-60 |

EXHAUST VALVE LIFTER.

| | | | |
|-------------------------------------|---|-----|----------|
| Lifter lever and spindle (combined) | 1 | ... | D8-E2861 |
| Spring, for lifter lever | 1 | ... | STD-700 |
| Crosshead, for valve lifter cable | 1 | ... | D8-E2862 |
| Lock nut, for cable crosshead | 1 | ... | STD-74 |

EXHAUST PIPE AND SILENCER SECTION.**EXHAUST PIPE.**

| | | | |
|------------------------------------|---|-----|--------------|
| Exhaust pipe, bare | 1 | ... | W41-G3L-E404 |
| Stay, for exhaust pipe | 1 | ... | W41-G3L-E406 |
| Nut, fixing pipe to stay | 1 | ... | STD-4 |
| Plain washer, for pipe fixing nut | 1 | ... | STD-174 |
| Spring washer, for pipe fixing nut | 1 | ... | STD-192 |

SILENCER.

| | | | |
|--|---|-----|--------------|
| Silencer, bare | 1 | ... | W41-G3L-E461 |
| Front clip, clamping silencer to pipe | 1 | ... | 20470 |
| Bolt, for silencer front clip | 1 | ... | STD-363 |
| Washer, for silencer front clip bolt | 2 | ... | STD-174 |
| Washer, spring, for silencer front clip bolt | 1 | ... | STD-192 |
| Nut, for silencer front clip bolt | 1 | ... | STD-4 |
| Stay, for silencer | 1 | ... | W41-G3L-E567 |
| Nut, fixing silencer to stay | 1 | ... | STD-4 |
| Plain washer, for silencer fixing nut | 1 | ... | STD-174 |
| Spring washer, for silencer fixing nut | 1 | ... | STD-192 |
| Bolt, fixing stay to fork end | 1 | ... | STD-363 |
| Washer, for fork end bolt | 2 | ... | STD-174 |
| Nut, for fork end bolt | 1 | ... | STD-4 |

CARBURETTER SECTION.

| Description. | Qty. | Price Each. | Part Number. |
|--------------|------|----------------|-----------------|
|--------------|------|----------------|-----------------|

COMPLETE CARBURETTER.

| | | | |
|------------------------------------|---|-----|--------------|
| Complete carburetter, Type 275F/1J | 1 | ... | W41-G3L-E67 |
| Packing piece, for carburetter | 1 | ... | W41-G3L-E167 |
| Gasket, for packing piece | 1 | ... | STD-581 |
| Gasket, for carburetter | 1 | ... | STD-581 |

£ s. d.

The complete carburetter does not include the control levers and cables.

FLOAT CHAMBER.

| | | | |
|--|---|-----|--------|
| Float chamber, bare | 1 | ... | 64-186 |
| Plug screw, for passage in chamber | 1 | ... | 13-153 |
| Fibre washer, for plug screw | 1 | ... | 14-039 |
| Bolt, holding chamber to mixing body | 1 | ... | 4-043 |
| Fibre washer, for holding bolt | 2 | ... | 4-053 |
| Top (or cover), for float chamber | 1 | ... | 14-208 |
| Screw, locking float chamber top | 1 | ... | 14-021 |
| Float, bare | 1 | ... | 14-015 |
| Needle, for float | 1 | ... | 14-024 |
| Lock nut, for float needle seat | 1 | ... | 14-178 |
| Fibre washer, for float needle seat | 1 | ... | 14-175 |
| Tickler plunger, for float chamber top | 1 | ... | 14-209 |
| Stop sleeve, for tickler plunger | 1 | ... | 14-210 |
| Spring, for tickler plunger | 1 | ... | 14-032 |
| Split pin, for tickler plunger sleeve | 1 | ... | 4-060 |

MIXING BODY.


| | | | |
|--|---|-----|-----------|
| Mixing body, bare | 1 | ... | 275-402-R |
| Union nut, for mixing body base | 1 | ... | 4-062 |
| Fibre washer, for union nut | 1 | ... | 4-040 |
| Top, for mixing body | 1 | ... | 4-032 |
| Ring, fixing top to mixing body | 1 | ... | 4-031 |
| Spring clip, locking fixing ring | 1 | ... | 4-235 |
| Screw, securing locking clip to body top | 1 | ... | 4-241 |
| Cable adjuster, for body top | 2 | ... | 4-035 |


JETS.

| | | | |
|--|---|-----|-----------|
| Jet barrel, or choke | 1 | ... | 275-403 |
| Needle jet | 1 | ... | 4-061 |
| Main jet, Size 120 | 1 | ... | 4-042-120 |
| Taper needle, for needle jet, 3 3/4 in. long | 1 | ... | 5-065 |
| Clip, for jet taper needle | 1 | ... | 4-230 |
| Split pin, locating taper needle clip | 1 | ... | 4-060 |
| Screw, for pilot jet air adjustment | 1 | ... | 13-129 |
| Lock nut, for pilot jet air screw | 1 | ... | 16-010 |

VALVES.

| | | | |
|-----------------------------------|---|-----|--------|
| Throttle valve, Size 5/5 | 1 | ... | 5-052 |
| Spring, for throttle valve | 1 | ... | 4-037 |
| Stop screw, for throttle | 1 | ... | 4-206 |
| Lock nut, for throttle stop screw | 1 | ... | 16-010 |
| Air Valve | 1 | ... | 5-045 |
| Tubular guide, for air valve | 1 | ... | 5-047 |
| Spring, for air valve | 1 | ... | 4-046 |
| Air intake | 1 | ... | 4-038 |

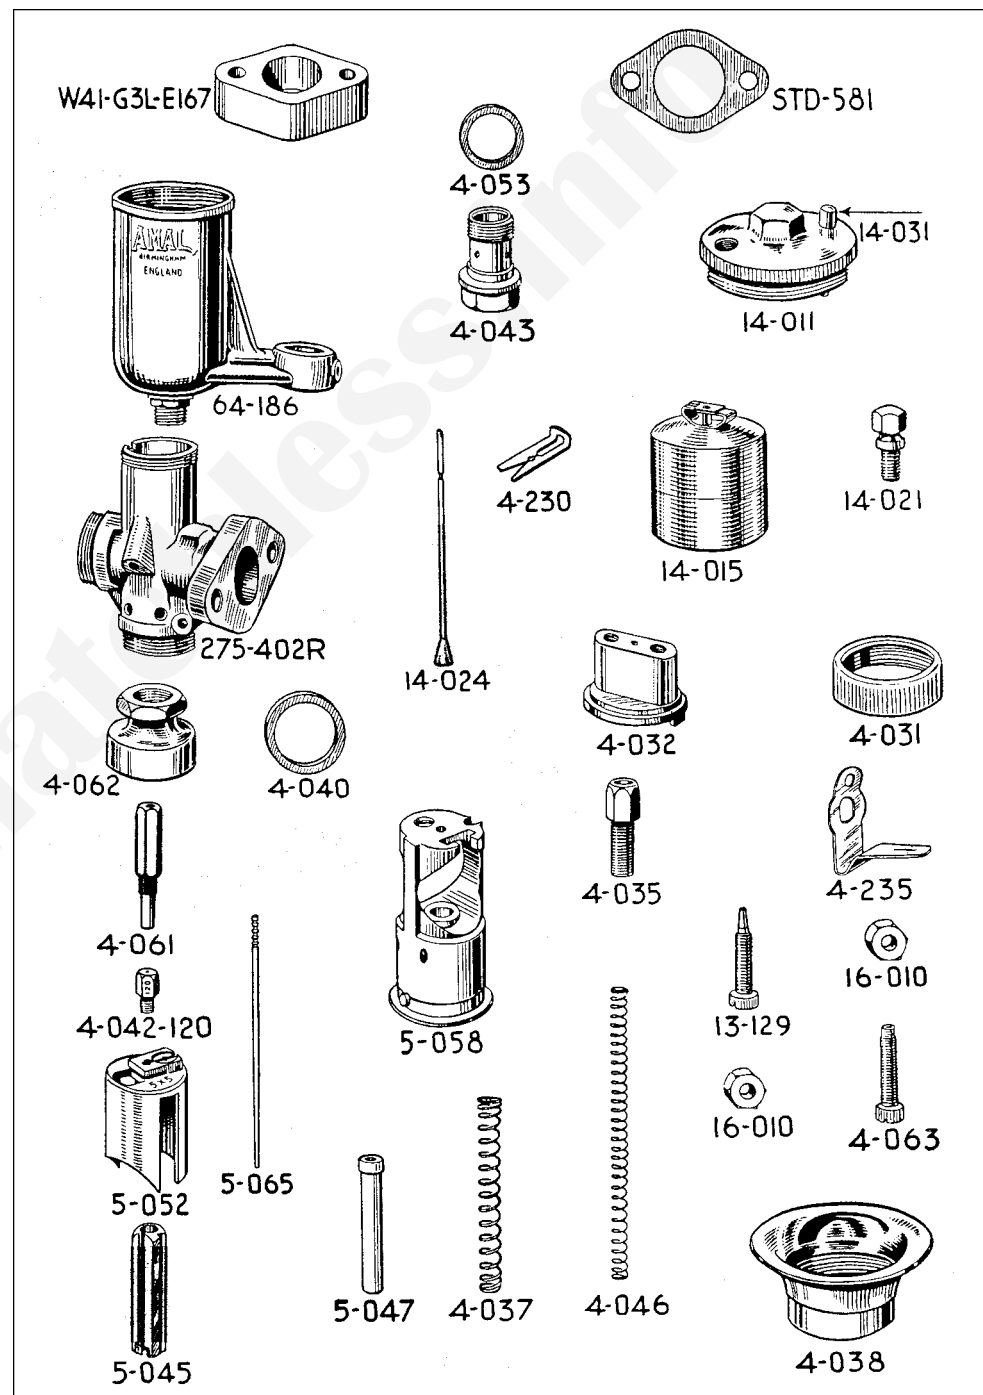

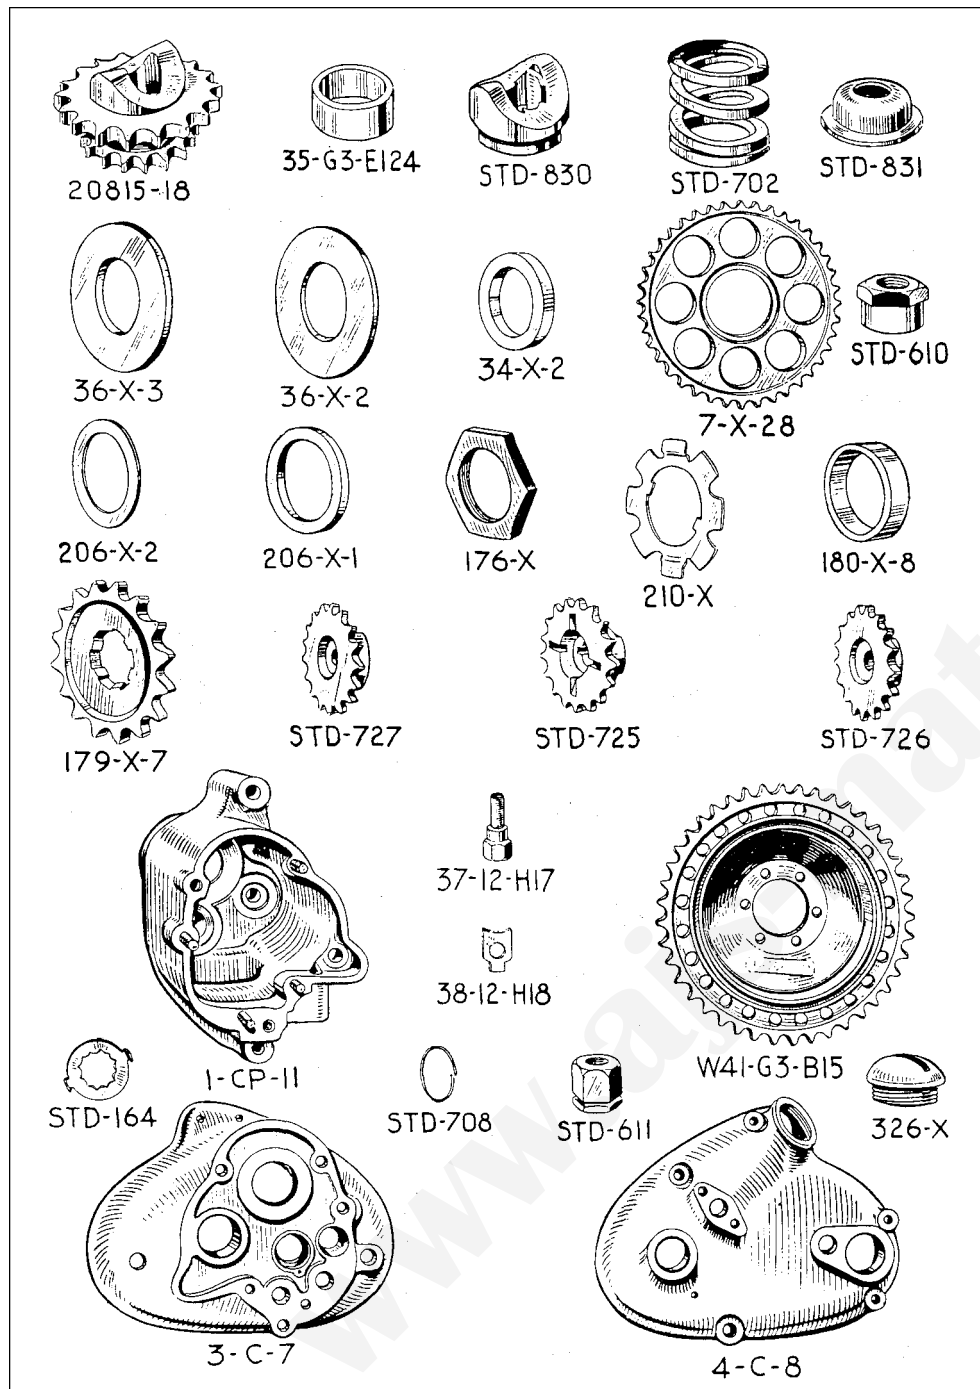

TRANSMISSION SECTION.

| Description. | Qty. | Price Each. | Part Number. |
|--|------|-------------|--------------|
| | | £ s. d. | |
| ENGINE SPROCKET. | | | |
| Engine sprocket, bare, 18 teeth | 1 | ... | 20815-18 |
| Distance collar, for engine sprocket | 1 | ... | 35-G3-E124 |
| Shock absorber cam | 1 | ... | STD-830 |
| Spring, for shock absorber | 1 | ... | STD-702 |
| Cap washer, for shock absorber spring | 1 | ... | STD-831 |
| Lock nut, for shock absorber | 1 | ... | STD-610 |
| CLUTCH SPROCKET. | | | |
| Chainwheel, bare, 40 teeth, 1/2 in. by .305in. | 1 | ... | 7-X-28 |
| Also see CLUTCH. | | | |
| Roller race, for sprocket bearing | 1 | ... | 34-X-2 |
| Rollers, for sprocket bearing (per set of) | 24 | ... | 35-X |
| Thin washer, for sprocket bearing | 1 | ... | 36-X-2 |
| Thick washer, for sprocket bearing | 1 | ... | 36-X-3 |
| GEAR BOX SMALL SPROCKET. | | | |
| Gear box sprocket, 16 teeth, 5/8 in. by .380in. | 1 | ... | 179-X-7 |
| Distance collar, for sprocket, 7/8 in. thick | 1 | ... | 180-X-8 |
| Distance washer, for sprocket, 1/8 in. thick | 1 | ... | 206-X-2 |
| Nut, retaining sprocket to main gear | 1 | ... | 176-X |
| Collar, under sprocket nut, 3/8 in. thick | 1 | ... | 206-X-1 |
| Lock washer for sprocket nut | 1 | ... | 210-X |
| REAR WHEEL SPROCKET. | | | |
| Brake drum and sprocket, 42 teeth | 1 | ... | W41-G3-BJ5 |
| Bolt, retaining brake drum and sprocket | 6 | ... | 37-12-H17 |
| Lock washer, for retaining bolt | 6 | ... | 38-12-H18 |
| Nut, for retaining bolt | 6 | ... | STD-4 |
| MAGNETO DRIVING SPROCKETS. | | | |
| Sprocket, on engine camshaft | 1 | ... | STD-727 |
| Washer, for camshaft sprocket | 1 | ... | STD-11 |
| Nut, for camshaft sprocket | 1 | ... | STD-4 |
| Sprocket, on magneto armature shaft | 1 | ... | STD-726 |
| Washer, for magneto sprocket | 1 | ... | 1102-1269 |
| Nut, retaining magneto sprocket | 1 | ... | 868-1036 |
| DYNAMO SPROCKET. | | | |
| Sprocket, on dynamo shaft | 1 | ... | STD-725 |
| Key, for dynamo sprocket | 1 | ... | STD-572 |
| Washer, plain, for dynamo sprocket | 1 | ... | STD-10 |
| Lock washer, for dynamo sprocket nut | 1 | ... | STD-164 |
| Lock ring, for dynamo sprocket nut | 1 | ... | STD-708 |
| Nut, retaining dynamo sprocket | 1 | ... | STD-611 |
| CHAINS. | | | |
| Front chain, 66 links, 1/2 in. by .305in. | 1 | ... | 110046-66 |
| Rear chain, 91 links, 5/8 in. by .380in. | 1 | ... | 110056-91 |
| Magneto chain, 58 links, 3/8 in. by .225 in. | 1 | ... | 110036-58 |
| Dynamo chain, 47 links, 3/8 in. by .225in. | 1 | ... | 110036-47 |
| Connecting link, for 1/2 in. chain | Q | ... | 46-26 |
| Cranked link, for 1/2 in. chain | Q | ... | 46-30 |
| Cranked link, for 3/8 in. chain | Q | ... | 56-30 |
| Spring clip, for 1/2 in. connecting link | Q | ... | 46-27 |
| Spring clip, for 3/8 in. connecting link | Q | ... | 56-27 |
| The front and rear chains include connecting links, and these are included in the number of links per chain. | | | |
| Magneto and dynamo chains are endless. | | | |
| GEAR BOX | | | |
| Complete gear box | 1 | ... | W41-G3L-G68 |
| GEAR BOX SHELL. | | | |
| Shell, bare (with provision for drain plug) | 1 | ... | 1-CP-16 |
| Stud, for shell, 1 1/8 in. by 5/8 in. | 2 | ... | 60-X-6 |
| Stud, for shell, 3 3/8 in. by 5/8 in. | 2 | ... | 60-X-7 |
| Stud, for shell, 1 in. by 1/4 in. | 2 | ... | 60-X-1 |
| Nut, for 5/8 in. stud | 4 | ... | 152-X |
| Nut, for 1/4 in. stud | 2 | ... | 63-X |
| Plug, drain, for gear box shell | 1 | ... | N-8008 |
| Kick-starter case, Khaki-green | 1 | ... | 3-C-7 |
| Stud, for kick-starter case, 2 1/4 in. by 1/4 in. | 3 | ... | 286-X |
| Nut, for 1/4 in. kick-starter case stud | 3 | ... | 63-X |
| Grease nipple, angular, for kick-starter case | 1 | ... | 245-X-2 |
| Cover, for kick-starter case, Khaki-green | 1 | ... | 4-C-8 |
| Filler cap, for kick-starter, case cover, Khaki-green | 1 | ... | 326-X |

| Description. | Qty. | Price Each. | Part Number. |
|---|------|-------------|--------------|
| GEAR BOX FIXING BOLTS. | | £ s. d. | |
| Top fixing bolt, 4 1/8 in. by 7/8 in. | 1 | ... | STD-313 |
| Bottom fixing bolt, 3 1/8 in. by 7/8 in. | 1 | ... | STD-312 |
| Distance collar, for top fixing bolt | 1 | ... | STD-632 |
| Nut, for top fixing bolt | 2 | ... | STD-2 |
| Nut, for bottom fixing bolt | 2 | ... | STD-2 |
| Washer, for top fixing bolt, left side | 1 | ... | STD-9 |
| Eye bolt, for from chain adjustment | 1 | ... | STD-594 |
| Nut, for eye bolt | 2 | ... | STD-21 5 |
| Crosshead block, for eye bolt | 1 | ... | STD-785 |
| Bolt, fixing crosshead to engine plate | 1 | ... | STD-361 |
| Washer, for crosshead fixing bolt | 1 | ... | STD-11 |

SHAFTS AND GEARS.

| | | | |
|---|---|-----|---------|
| Mainshaft, 10 1/4 in. overall length | 1 | ... | 10-C-15 |
| Driving gear, with bushes, 32 teeth | 1 | ... | 15-C-12 |
| Bush, only, for driving gear | 2 | ... | 187-X-3 |
| Sliding gear, for mainshaft, 18/23 teeth | 1 | ... | 14-C-4 |
| Third gear, for mainshaft, 29 teeth | 1 | ... | 24-C-4 |
| Layshaft spindle | 1 | ... | 30-C-9 |
| Small gear on layshaft, 18 teeth | 1 | ... | 28-C-6 |
| First gear on layshaft, 32 teeth | 1 | ... | 27-C-5 |
| Second gear on layshaft, 27 teeth | 1 | ... | 26-C-5 |
| Third gear on layshaft, 21 teeth | 1 | ... | 25-C-5 |
| Sliding clutch, for layshaft | 1 | ... | 29-C-3 |

GEAR BOX BEARINGS.

| | | | |
|--|---|-----|----------|
| Ball bearing, for main driving gear | 1 | ... | 177-X |
| Gland felt washer, for ball bearing | 1 | ... | 112-C |
| Gland metal washer, dished | 1 | ... | 115-C |
| Split ring, locating bearing in shell | 1 | ... | 113-C |
| Gland outer washer, for bearing | 1 | ... | 114-C |
| Spring split ring, retaining outer washer | 1 | ... | 80-X |
| Ball bearing, for mainshaft | 1 | ... | 68-X |
| Metal washer, for mainshaft bearing | 1 | ... | 37-1-C-2 |
| Spring split ring, retaining washer | 1 | ... | 37-2-C |
| Bush, for layshaft | 2 | ... | 181-X |
| Peg, locating layshaft bush | 2 | ... | 87-X |
| Cover washer, in shell, for layshaft bush | 1 | ... | 182-X |

Dimensions of UF-177-X 1 1/2 in. by 62mm. by 16mm.
Dimensions of UF-115-C 1 1/2 in. by 2 in.
Dimensions of UF-114-C 1 1/2 in. by 2 7/8 in.
Dimensions of UF-68-X 12mm. by 40mm. by 17mm.
Dimensions of UF-37-1-C-2: 1 1/4 in. by 1 7/8 in.


GEAR OPERATING PARTS.


| | | | |
|--|---|-----|---------|
| Operating fork, for mainshaft sliding gear | 1 | ... | 42-C |
| Operating fork, for layshaft sliding clutch | 1 | ... | 43-C |
| Peg, for operating forks | 2 | ... | 157-X |
| Split pin, for operating fork pegs | 2 | ... | 158-X |
| Camshaft, bare | 1 | ... | 45-C-2 |
| Bush, in shell, for camshaft | 1 | ... | 159-X |
| Pawl (engages in camshaft) | 1 | ... | 163-X-2 |
| Bearing pin, for pawl | 1 | ... | 164-X |
| Nut, for pawl bearing pin | 1 | ... | 95-X |
| Spring, for pawl | 1 | ... | 193-X-1 |
| Screwed plug, for pawl spring | 1 | ... | 98-X |

All the above parts are INSIDE the GEAR BOX SHELL

| | | | |
|---|----|-----|----------|
| Quadrant | 1 | ... | 162-X-3 |
| Sector | 1 | ... | 161-X-2 |
| Ratchet | 1 | ... | CO-51-6 |
| Quadrant, sector and ratchet assembled | 1 | ... | CO-51-6A |
| Rivet, fixing sector | 2 | ... | CO-96-1 |
| Control spindle | 1 | ... | CO-96-2 |
| Nut (inside) for control spindle | 1 | ... | CO-90 |
| Bush, for control spindle (in K.S. case) | 1 | ... | 287-X |
| Bush, for camshaft (in K.S. case) Used on gear boxes | 1 | ... | CO-91 |
| Rollers, for camshaft (in K.S. case) up to 70975 | 12 | ... | 160-X-2 |
| Bush, for camshaft (in K.S. case) Used on gear boxes numbered 70975 upwards and dispenses with rollers | 1 | ... | 192-X |
| Control quadrant | 1 | ... | 160-X-3 |
| Sleeve for control quadrant | 1 | ... | CO-53-4 |
| Peg, for operating pawl | 1 | ... | CO-94 |
| Quadrant, sleeve and pawl peg, assembled | 1 | ... | CO-49-5 |
| Bush, for control quadrant sleeve | 1 | ... | CO-66-1 |
| Bolt, fixing quadrant sleeve bush | 1 | ... | CO-67-1 |
| Indexing rocking pawl | 1 | ... | CO-52-5 |
| Spindle, for indexing pawl | 1 | ... | CO-60-1 |
| Spring box | 1 | ... | CO-49-5 |
| Coverplate, for spring box | 1 | ... | CO-56-4 |
| Main spring, for spring box (large spring) | 2 | ... | CO-66-1 |
| Pawl spring, for spring box (small spring) | 2 | ... | CO-67-1 |
| Plate, for main spring | 2 | ... | CO-59-1 |
| Plate, for pawl spring | 2 | ... | CO-58-1 |

All the above parts are INSIDE THE KICKSTARTER CASE.

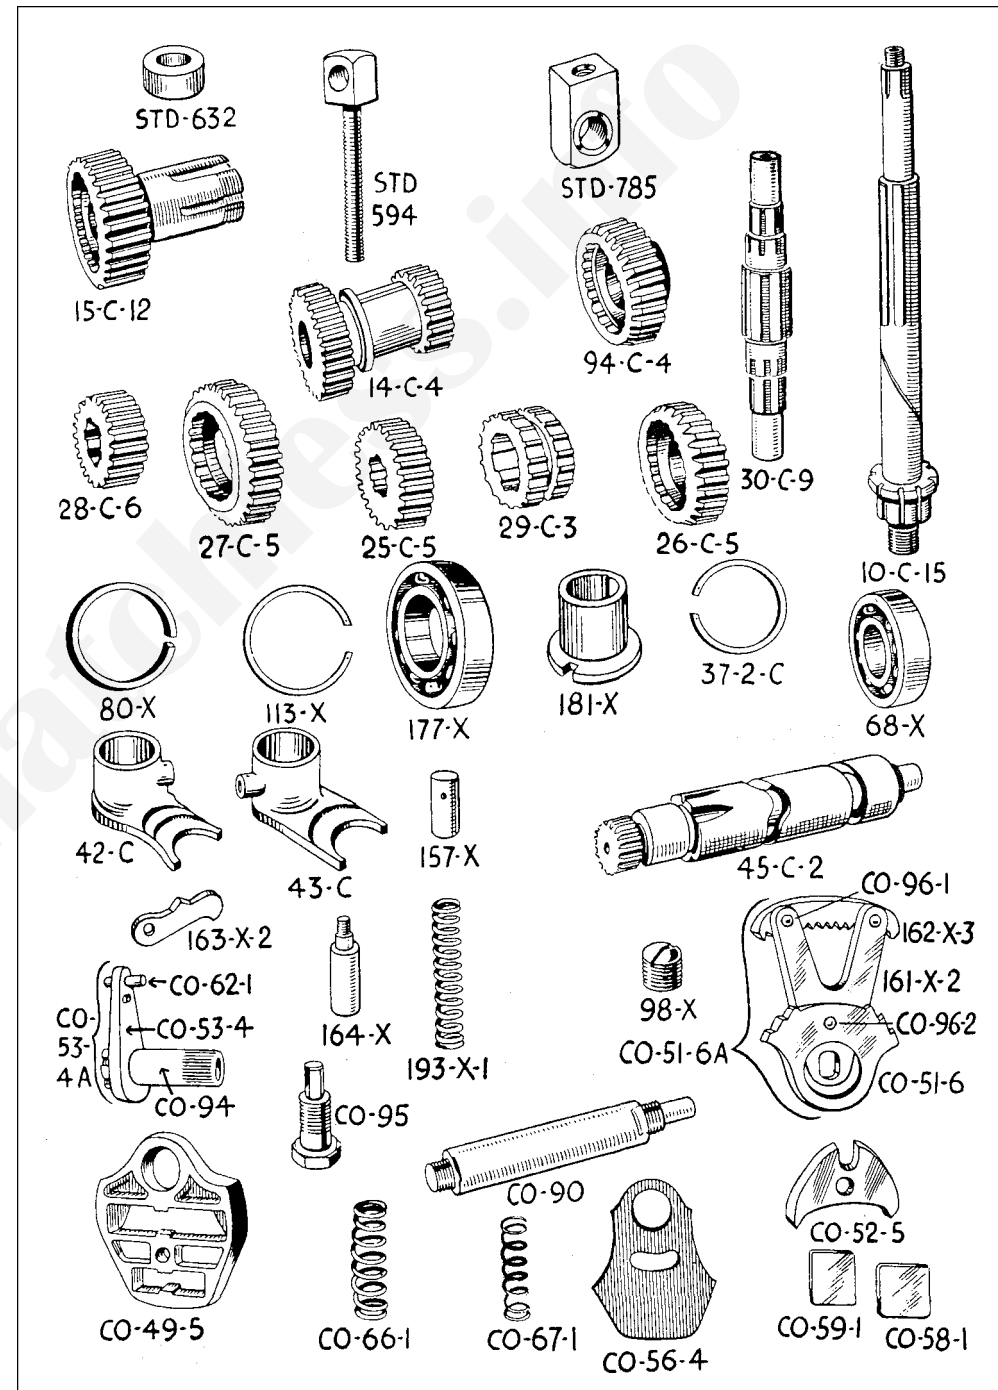

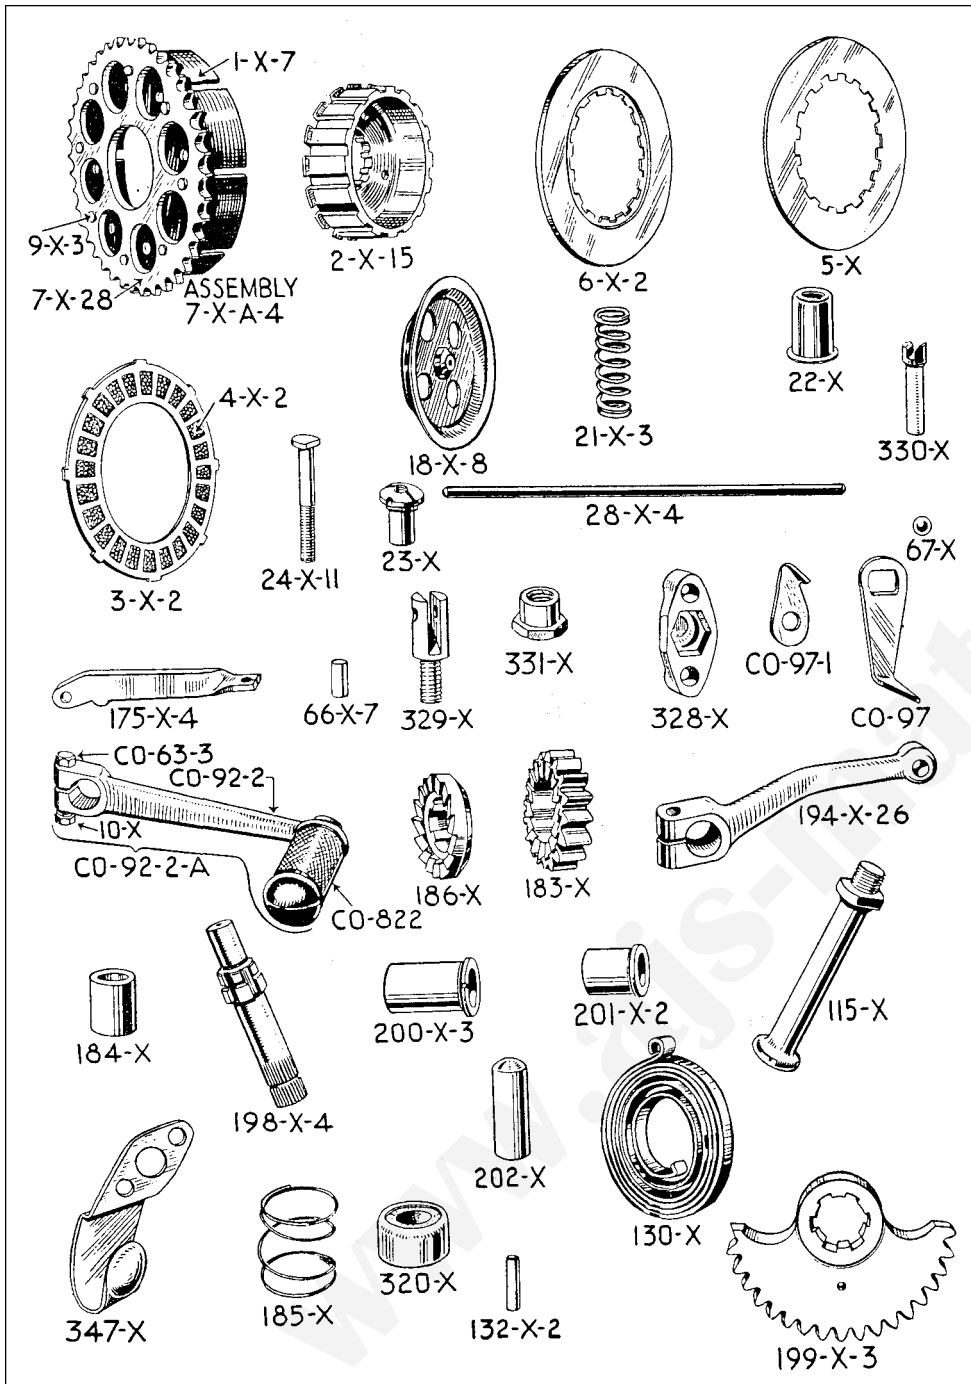

| Description. | Qty. | Price Each. | Part Number. |
|---|------|-------------|--------------|
| | | £ s. d. | |
| CLUTCH. | | | |
| Clutch case | 1 | ... | 1-X-7 |
| Chainwheel and clutch case rivet | 8 | ... | 9-X-3 |
| Chainwheel centre, 1 1/8 in. | 1 | ... | 7-X-A-4 |
| Clutch centre, 1 1/8 in. | 1 | ... | 2-X-15 |
| Nut, retaining clutch centre to mainshaft | 1 | ... | 69-X |
| Plain washer, for centre retaining nut | 1 | ... | 71-X |
| Spring washer, for centre retaining nut | 1 | ... | 212-X |
| Steel plain clutch plate, thick | 1 | ... | 6-X-2 |
| Steel plain clutch plate, thin | 4 | ... | 5-X |
| Clutch friction plate, with inserts | 4 | ... | 3-X-2 |
| Fabric inserts only (price per dozen) | 96 | ... | 4-X-2 |
| Spring pressure plate | 1 | ... | 18-X-8 |
| Spring, for clutch | 4 | ... | 21-X-3 |
| Cup, for clutch spring | 4 | ... | 22-X |
| Stud, for clutch spring, 1 7/8 in. | 4 | ... | 24-X-11 |
| Adjustment nut, for clutch spring | 4 | ... | 23-X |

For the bare clutch Chainwheel and roller bearings, see CLUTCH SPROCKET in the TRANSMISSION SECTION.

CLUTCH OPERATING PARTS.

| | | | |
|---|---|-----|---------|
| Trust rod, 9 7/8 in. long | 1 | ... | 28-X-4 |
| Operating plunger | 1 | ... | 330-X |
| Steel ball, for operating plunger | 1 | ... | 67-X |
| Operating lever | 1 | ... | 175-X-4 |
| Pin, or axle, for operating lever | 1 | ... | 66-X-7 |
| Fork, for operating lever | 1 | ... | 329-X |
| Sleeve, or nut, for operating lever fork | 1 | ... | 331-X |
| Cap, covering sleeve, on K.S. case cover, Khaki-green | 1 | ... | 328-X |
| Screw, fixing cap to K.S. case cover | 2 | ... | CO-97 |

GEAR CONTROL PARTS.

| | | | |
|--|---|-----|-----------|
| Neutral indicator, fixed, Khaki-green | 1 | ... | CO-97-1 |
| Neutral indicator, moving, Khaki-green | 1 | ... | CO-97 |
| Nut, retaining moving indicator, Khaki-green | 1 | ... | 171-X |
| Foot control lever, bare, Khaki-green | 1 | ... | CO-92-2 |
| Foot control lever, with rubber, Khaki-green | 1 | ... | CO-92-2-A |
| Rubber, for foot control lever | 1 | ... | CO-822 |
| Bolt, clamping foot lever to sleeve, Khaki-green | 1 | ... | 10-X |
| Nut, for foot lever clamping bolt, Khaki-green | 1 | ... | 186-X |

KICKSTARTER.

| | | | |
|---|---|-----|----------|
| Driving ratchet | 1 | ... | 186-X |
| Ratchet pinion | 1 | ... | 183-X |
| Bush, for ratchet pinion | 1 | ... | 184-X |
| Spring, for ratchet pinion | 1 | ... | 185-X |
| Nut, retaining ratchet pinion | 1 | ... | 70-X |
| Spindle, for K.S. quadrant and foot lever | 1 | ... | 198-X-4 |
| Bush, for K.S. spindle (in K.S. case) | 1 | ... | 201-X-2 |
| Bush, for K.S. spindle (in K.S. case cover) | 1 | ... | 200-X-3 |
| Quadrant, for K.S. spindle | 1 | ... | 199-X-3 |
| K.S. spindle and quadrant, assembled | 1 | ... | 199-X-3A |
| Return spring, for kickstarter | 1 | ... | 130-X |
| Pin, for return spring | 1 | ... | 132-X-2 |
| Stop rubber and sleeve, for quadrant | 1 | ... | 320-X |
| Peg, for stop rubber and sleeve | 1 | ... | 202-X |
| Spring clip—external—for crank | 1 | ... | 347-X |

All the above parts are INSIDE the KICKSTARTER CASE.


| | | | |
|---|---|-----|----------|
| Kick-start foot lever, bare, Khaki-green | 1 | ... | 194-X-26 |
| Pedal pin, for foot lever, Khaki-green | 1 | ... | 115-X |
| Bolt, clamping foot lever to spindle, Khaki-green | 1 | ... | 315-X |
| Spring washer, for lever clamping bolt | 1 | ... | 109-X |
| Nut, for lever clamping bolt, Khaki-green | 1 | ... | 144-X |


All the above parts are OUTSIDE the GEAR BOX

FRAME SECTION.

| Description. | Qty. | Price Each. | Part Number. |
|---|------|-------------|-----------------|
| FRAME. | | | |
| Frame, complete | 1 | ... | W41-G3L-F23-24 |
| Front portion of frame, bare, Khaki-green | 1 | ... | W41-G3L-F23 |
| Rear portion of frame, bare, Khaki-green | 1 | ... | W41-G3L-F24 |
| Bolt, for seat lug (under saddle) | 1 | ... | STD-597 |
| Washer, for seat lug bolt | 1 | ... | STD-8 |
| Nut, for seat lug bolt | 2 | ... | STD-1 |
| Nut, for earth wire, on seat lug bolt | 1 | ... | STD-79 |
| Bolt, for seat tube bottom lug | 1 | ... | STD-302 |
| Washer, for seat tube bottom lug bolt | 2 | ... | STD-10 |
| Nut, for seat tube bottom lug bolt | 2 | ... | STD-3 |
| Bolt, uniting front and rear frame | 1 | ... | STD-280 |
| Spacer, for frame uniting bolt, Khaki-green | 2 | ... | 40-G3-F66 |
| Nut (domed), for frame uniting bolt | 2 | ... | STD-621 |
| Bolt, adjusting rear chain | 2 | ... | STD-596 |
| Nut, for chain adjusting bolt | 2 | ... | STD-5 |
| Grease nipple, for bead lug | 1 | ... | STD-51 |
| Engine plate, left side, Khaki-green | 1 | ... | W41-G3L-E250-L |
| Engine plate, right side, Khaki-green | 1 | ... | W41-G3L-E250-R |
| Bracket, for electric horn, Khaki-green | 1 | ... | 40-G3-E550 |
| Bolt, fixing bracket to front frame tube | 1 | ... | STD-303 |
| Nut, for bracket to front frame tube bolt | 2 | ... | STD-3 |
| Ball race, for frame | 1 | ... | STD-806 |
| Balls, 3/8 in. diameter, for steering head (per set) | 58 | ... | STD-72 |
| FORKS. | | | |
| Fork crown | 1 | ... | W41-G3L-FF17 |
| Head stem | 1 | ... | 41-18-FF20 |
| Circlip, for head stem | 1 | ... | 40-G12M-FF92 |
| Ball race, for fork crown | 1 | ... | STD-805 |
| Pinch bolt, for fork crown | 2 | ... | STD-369 |
| Washer, for fork crown pinch bolt | 2 | ... | STD-11 |
| Handlebar lug | 1 | ... | W41-G3L-FF21 |
| The above handlebar lug includes the handlebar half clip and its studs with washers and nuts. | | | |
| Ball race, for handlebar lug | 1 | ... | STD-806 |
| Grease nipple, for handlebar lug | 1 | ... | STD-51 |
| Adjusting nut, for head stem | 1 | ... | LFF-42 |
| Lock nut (ut domed), for adjusting nut | 1 | ... | L4-FF46 |
| Tube, inner, fixed | A | ... | W41-G3L-FF3 |
| Bush, bottom, for fixed inner tube | A | ... | 40-G12M-FF191 |
| Circlip, for bottom bush | A | ... | 40-G12M-FF192 |
| Bolt, for top of inner tube | A | ... | 40-G12M-FF189 |
| Washer, for inner tube top bolt | A | ... | 40-G12M-FF190 |
| Fork slider, left side | 1 | ... | 40-G12M-FF183-L |
| Fork slider, right side | 1 | ... | 40-G12M-FF183-R |
| Cap, for fork slider | 2 | ... | 40-G12M-FF183-C |
| Slider extension | A | ... | 40-G12M-FF185-A |
| Bush (fibre), guide, for fork tube | A | ... | 40-G12M-FF41 |
| Oil seal, for fork tube | A | ... | 40-G12M-FF91 |
| Washer (paper), for oil seal | A | ... | 40-G12M-FF95 |
| Spring, for fork | A | ... | W41-G3L-FF32 |
| Washer (leather), seating, for spring | A | ... | 40-G12M-FF126 |
| Tube, cover, top | 2 | ... | W41-G3L-FF184-T |
| Cap, for top cover tube | 2 | ... | 40-G12M-FF186 |
| Plate, locating, for top plate (screwed) | 2 | ... | 40-G12M-FF128 |
| Tube, cover, bottom | 2 | ... | W41-G3L-FF184-R |
| Plate, locating, for bottom tube (plates) | 2 | ... | 40-G12M-FF127 |
| Screw, retaining both locating plates | 6 | ... | 40-G12M-FF129 |
| Plug, oil level, for slider | 2 | ... | STD-485 |
| Washer (fibre), for oil level plug | 2 | ... | STD-203 |
| Rod, for damper | B | ... | W41-G3L-FF55 |
| Nut, lock, for top of damper | B | ... | STD-4 |
| Tube, assembled, for damper | B | ... | 40-G12M-FF60-A |
| Sleeve, plunger, for damper tube | B | ... | 40-G12M-FF56 |
| Valve, for damper tube | B | ... | 40-18-FF58 |
| Seat, for damper tube valve | B | ... | 40-18-FF57 |
| Pin, stop, for damper tube valve | B | ... | 40-18-FF59 |
| Nut, lock, for damper tube valve | B | ... | STD-5 |
| Clip, retaining damper sleeve | B | ... | 40-G12M-FF93 |
| Washer (fibre), for damper tube bolt | B | ... | 40-G12M-FF80 |
| Bolt, for damper tube (bottom) | B | ... | 40-G12M-FF94 |
| Bracket, for speedometer | 1 | ... | 40-G12M-FF78 |
| Bolt, fixing speedometer bracket | 2 | ... | STD-342 |
| Washer, for speedometer bracket bolt | 2 | ... | STD-12 |
| Stud, securing front wheel axle | 4 | ... | W41-G12M-FF195 |
| Nut, for front wheel axle stud | 4 | ... | STD-4 |

(SEE NEXT PAGE FOR COMPLETE FORK ASSEMBLIES.)

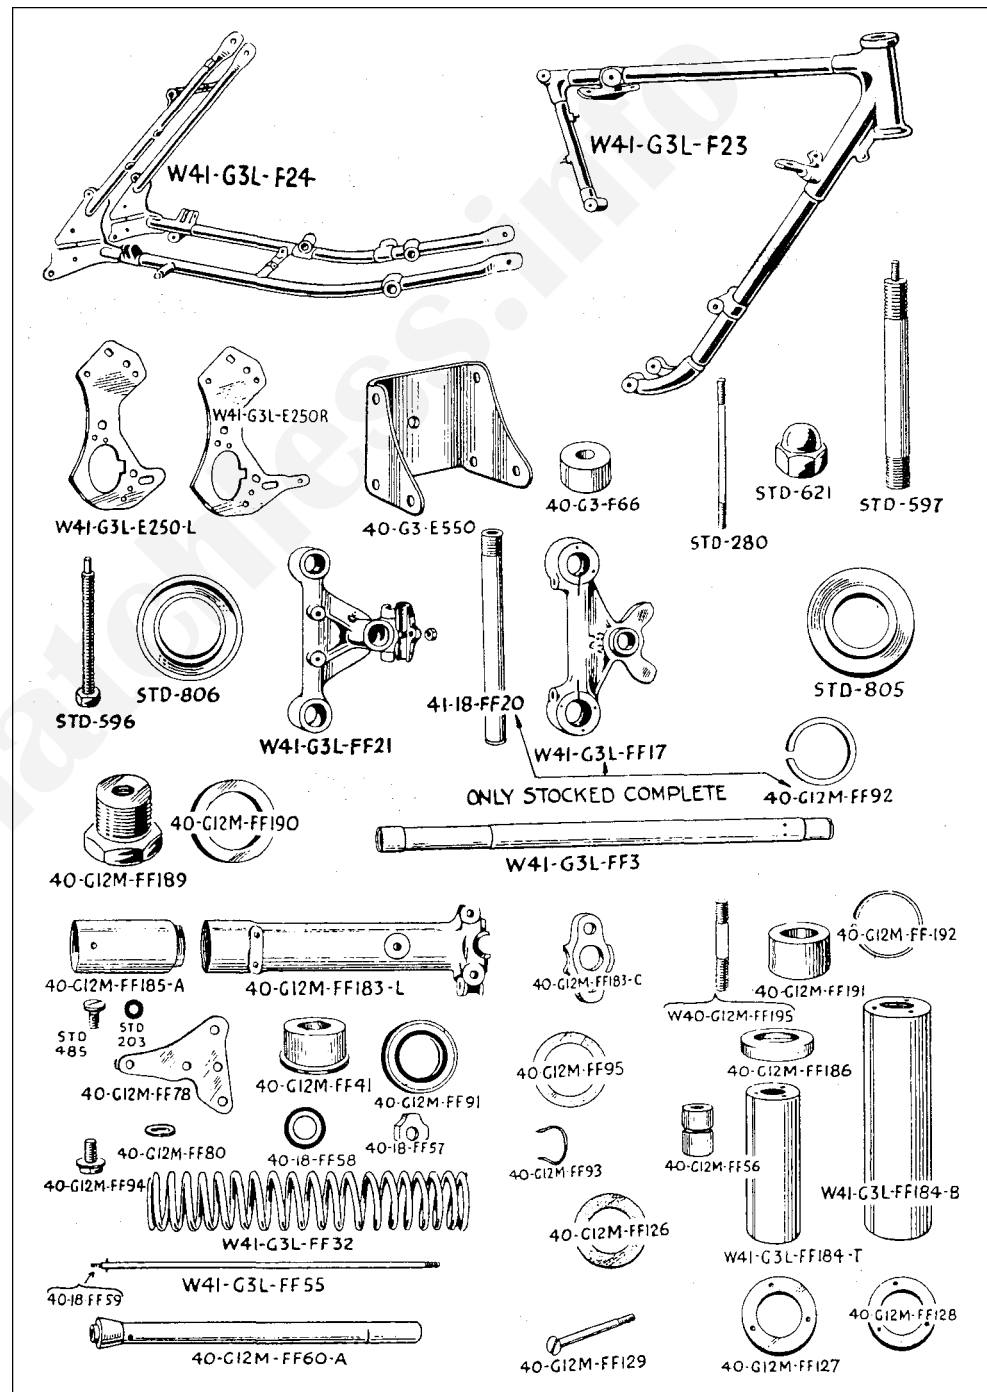

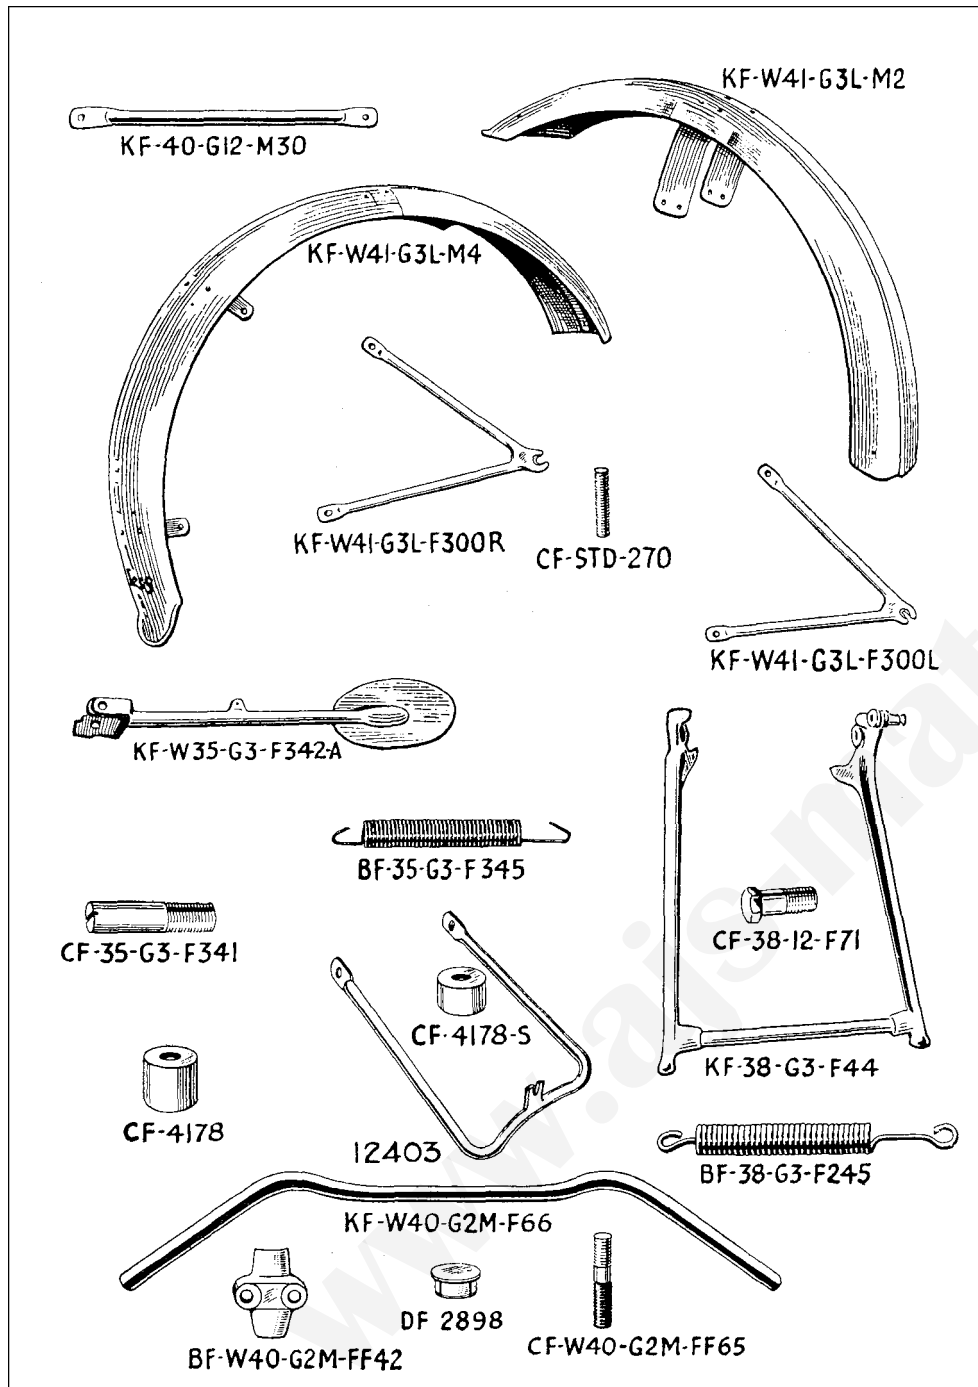



A COMPLETE FRONT FORK ASSEMBLY COMPRISES ALL THE PARTS LISTED IN THE FORK GROUP ON THE PREVIOUS PAGE. THE PART No. IS W41-G3L-FF1.

FOR EASE OF SERVICING, THE MAIN FORK UNITS ARE LISTED AND SUPPLIED AS SEPARATE ASSEMBLIES, THE OBJECT BEING TO ENABLE A COMPLETE ASSEMBLY TO BE EXCHANGED IN THE MINIMUM OF TIME. THESE COMPLETE ASSEMBLIES ARE LISTED BELOW.

| Description. | Qty. | Price Each. | Part Number. |
|---|------|-------------|----------------|
| Front fork central tube assembly | 2 | £ s. d. | W41-G3L-FF201 |
| The above assembly comprises all those parts in the fork section (page 16) that are marked A. | | | |
| Front fork damper tube assembly | 2 | £ s. d. | W41-G3L-FF202 |
| The above assembly fits inside the central tube assembly and comprises all those parts in the fork section (page 16) that are marked B. | | | |
| HANDLEBAR. | | | |
| Handlebar, bare, Khaki-green | 1 | £ s. d. | W40-G2M-FF66 |
| Half clip, only, for handlebar | 1 | £ s. d. | W40-G2M-FF42 |
| Stud, for handlebar clip | 2 | £ s. d. | W40-G2M-FF65 |
| Washer, for handlebar clip stud | 2 | £ s. d. | STD-11 |
| Nut, for handlebar clip stud | 2 | £ s. d. | STD-4 |
| End plug, for handlebars | 2 | £ s. d. | 2898 |
| FRONT STAND | | | |
| Front stand, bare | 1 | £ s. d. | 12403 |
| Bolt, fixing stand to fork end, left side | 1 | £ s. d. | W41-G3L-FF422 |
| Bolt, fixing stand to fork end, right side | 1 | £ s. d. | W41-G3L-FF421 |
| Spring washer, for stand fixing bolt | 2 | £ s. d. | HBD-52 |
| Split pin, for stand fixing bolt | 2 | £ s. d. | STD-14 |
| Bolt, anchoring front stand to mudguard | 1 | £ s. d. | STD-344 |
| Washer, for anchor bolt | 1 | £ s. d. | STD-12 |
| Nut, plain, for anchor bolt | 1 | £ s. d. | STD-5 |
| Nut, with collar, for anchor bolt | 1 | £ s. d. | STD-211 |
| REAR STAND. | | | |
| Rear stand, bare, Khaki-green | 1 | £ s. d. | 38-G3-F44 |
| Bolt, fixing stand to fork end | 2 | £ s. d. | 38-12-F71 |
| Nut, for stand fixing bolt | 2 | £ s. d. | STD-71 |
| Return spring, for rear stand | 1 | £ s. d. | 38-G3-F245 |
| PROP STAND. | | | |
| Prop stand leg, bare, Khaki-green | 1 | £ s. d. | W35-G3-F342-A |
| Hinge bolt, for prop stand leg | 1 | £ s. d. | 35-G3-F341 |
| Nut, for hinge bolt | 1 | £ s. d. | STD-2 |
| Return spring, for prop stand leg | 1 | £ s. d. | 35-G3-F345 |
| FRONT MUDGUARD. | | | |
| Mudguard, bare, Khaki-green | 1 | £ s. d. | W41-G3L-M2 |
| Bolt, fixing bracket to fork tubes | 4 | £ s. d. | W41-G3L-M38 |
| Washer, for bracket fixing bolt | 4 | £ s. d. | STD-192 |
| Stay, for mudguard, Khaki-green | 2 | £ s. d. | 40-G12-M30 |
| Bolt, fixing stay to mudguard | 2 | £ s. d. | STD-70 |
| Spring washer, for stay to guard bolt | 2 | £ s. d. | STD-191 |
| Plain washer, for stay to guard bolt | 2 | £ s. d. | STD-12 |
| Nut, for stay to guard bolt | 2 | £ s. d. | STD-5 |
| Bolt, fixing stay to fork end | 2 | £ s. d. | W41-G3L-M38 |
| Washer, for stay to fork end bolt | 2 | £ s. d. | STD-192 |
| REAR MUDGUARD. | | | |
| Mudguard, bare, Khaki-green | 1 | £ s. d. | W41-G3L-M4 |
| Nut, uniting front and rear portions, Khaki-green | 2 | £ s. d. | STD-5 |
| Washer, for guard uniting nut | 2 | £ s. d. | STD-12 |
| Bolt, fixing guard to bottom bridge | 1 | £ s. d. | STD-345 |
| Spring washer, for bottom bridge bolt | 1 | £ s. d. | STD-191 |
| Nut, for bottom bridge bolt | 1 | £ s. d. | STD-5 |
| Bolt, fixing guard to oil tank bracket | 1 | £ s. d. | STD-369 |
| Spacer, thick, for oil tank bracket bolt | 1 | £ s. d. | 4178 |
| Spacer, thin, for oil tank bracket bolt | 1 | £ s. d. | 4178-S |
| Washer, for oil tank bracket bolt (plain) | 1 | £ s. d. | STD-11 |
| Washer, for oil tank bracket bolt (spring) | 1 | £ s. d. | STD-192 |
| Nut, for oil tank bracket bolt | 2 | £ s. d. | STD-4 |
| Bolt, fixing guard to top bridge | 1 | £ s. d. | STD-346 |
| Spring washer for top bridge bolt | 1 | £ s. d. | STD-191 |
| Nut, for top bridge bolt | 1 | £ s. d. | STD-5 |
| Stay assembly, for guard, left side | 1 | £ s. d. | W41-G3L-F300-L |
| Stay assembly, for guard, right side | 1 | £ s. d. | W41-G3L-F300-R |
| Stud, fixing stay to fork end | 2 | £ s. d. | STD-270 |
| Nut, locking stay stud in fork end | 2 | £ s. d. | STD-74 |
| Nut, locking stay to fork end stud | 2 | £ s. d. | STD-213 |
| Bolt, fixing guard to rear of stay | 2 | £ s. d. | STD-363 |
| Spring washer, for rear stay bolt | 2 | £ s. d. | STD-192 |
| Nut, for rear stay bolt | 2 | £ s. d. | STD-74 |
| Bolt, fixing guard to front of stay, left | 1 | £ s. d. | STD-363 |
| Bolt, fixing guard to front of stay, right | 1 | £ s. d. | STD-364 |
| Spring washer, for front stay bolt | 2 | £ s. d. | STD-192 |
| Nut for front stay bolt | 2 | £ s. d. | STD-4 |

| Description. | Qty. | Price Each. | Part Number. |
|---|------|----------------|-----------------|
| £ s. d. | | | |
| REAR CARRIER. | | | |
| Rear carrier, bare, Khaki-green | 1 | ... | W41-G3L-EQ 40 |
| For the fixing bolts see the REAR MUDGUARD. | | | |
| FRONT CHAINCASE. | | | |
| Chaincase, complete, Khaki-green | 1 | ... | W40-G2M-C-A |
| Chaincase, back half, bare, Khaki-green | 1 | ... | W40-G2M-C6 |
| Chaincase, front half, bare, Khaki-green | 1 | ... | W40-G2M-C1 |
| Metal band, for chaincase, Khaki-green | 1 | ... | 12302-7 |
| Screw, clamping metal band for chaincase | 1 | ... | STD-452 |
| Rubber fillet (or joint) for chaincase band | 1 | ... | 12302-9 |
| Inspection cap, complete, Khaki-green | 1 | ... | 17350-1 |
| Inspection cap, bare, Khaki-green | 1 | ... | STD-780 |
| Cork washer, for inspection cap | 1 | ... | STD-580 |
| Knurled screw, for inspection cap | 1 | ... | STD-593 |
| Back plate, for knurled screw | 1 | ... | STD-781 |
| Bolt, fixing chaincase to engine | 3 | ... | STD-440 |
| Locking plate, for engine bolt | 3 | ... | STD-165 |
| Bolt, fixing centre of chaincase | 1 | ... | STD-315 |
| Spacer, for centre bolt (between engine plates) 2½ in. long | 1 | ... | 20841 |
| Spacer, for centre bolt (outside engine plate) 1 61/64 in. long | 1 | ... | W40-G2M-C27 |
| Spacer, for centre bolt (inside chaincase) ¾ in. long | 1 | ... | 35-2-C29 |
| Washer, for centre bolt | 2 | ... | STD-9 |
| Nut, for centre bolt | 3 | ... | STD-2 |
| REAR CHAINGUARD. | | | |
| Chainguard, bare, Khaki-green | 1 | ... | W40-G2M-C10 |
| Bolt, fixing top of guard, in front | 1 | ... | 36-8-C28 |
| Washer, for top of guard front bolt | 1 | ... | STD-11 |
| Bolt, fixing bottom of guard, in front | 1 | ... | STD-70 |
| Washer, for bottom front bolt | 1 | ... | STD-12 |
| Nut, for bottom front bolt | 1 | ... | STD-5 |
| Bolt, fixing rear of guard | 1 | ... | STD-363 |
| Washer, for rear of guard fixing bolt | 1 | ... | STD-11 |
| FOOTRESTS. | | | |
| Footrest, rod, bare | 1 | ... | W40-G2M-FR8 |
| Spacer, for rod, inside engine plates | 1 | ... | V2-FR6 |
| Washer, for footrest rod | 2 | ... | STD-194 |
| Nut, for footrest rod | 2 | ... | STD-2 |
| Footrest arm (or hanger), Khaki-green | 2 | ... | W41-G3L-FR22 |
| PILLION FOOTRESTS. | | | |
| Spindle, for pillion footrests | 2 | ... | W41-G3L-FR18 |
| Bolt, pivot, for footrest spindle | 2 | ... | STD-403 |
| Nut, for spindle pivot bolt | 2 | ... | STD-73 |
| Pillion footrests, complete, per pair | 1 | ... | W41-G3L-FR18-A |
| SADDLE. | | | |
| Saddle with springs | 1 | ... | W41-G3L-F60 |
| Rexine cover (or saddle top), bare | 1 | ... | 38-G3-F60T |
| Rear spring, for saddle | 2 | ... | D5-F560 |
| Hinge bolt, for front of saddle | 1 | ... | STD-410 |
| Washer, for hinge bolt | 1 | ... | STD-10 |
| Nut, for hinge bolt | 1 | ... | STD-3 |
| Bolt, fixing spring to frame | 2 | ... | STD-368 |
| Washer, for spring to frame bolt | 2 | ... | STD-11 |
| Nut, for spring to frame bolt | 2 | ... | STD-4 |
| PILLION SEAT. | | | |
| Pillion seat | 1 | ... | W41-G3L-EQ241 |
| Bolt, fixing pillion seat | 4 | ... | STD-70 |
| Washer, for pillion seat bolt | 4 | ... | STD-12 |
| Nut, for pillion seat bolt | 4 | ... | STD-5 |
| NAME TRANSFERS. | | | |
| Transfer for rear mudguard | 1 | ... | 38-G3-F383 |
| Transfer for top of oil tank | 1 | ... | 38-G3-F381 |
| Transfer for side of oil tank | 1 | ... | 38-G3-F392 |
| Transfer for far front chaincase | 1 | ... | 38-G3-F393 |

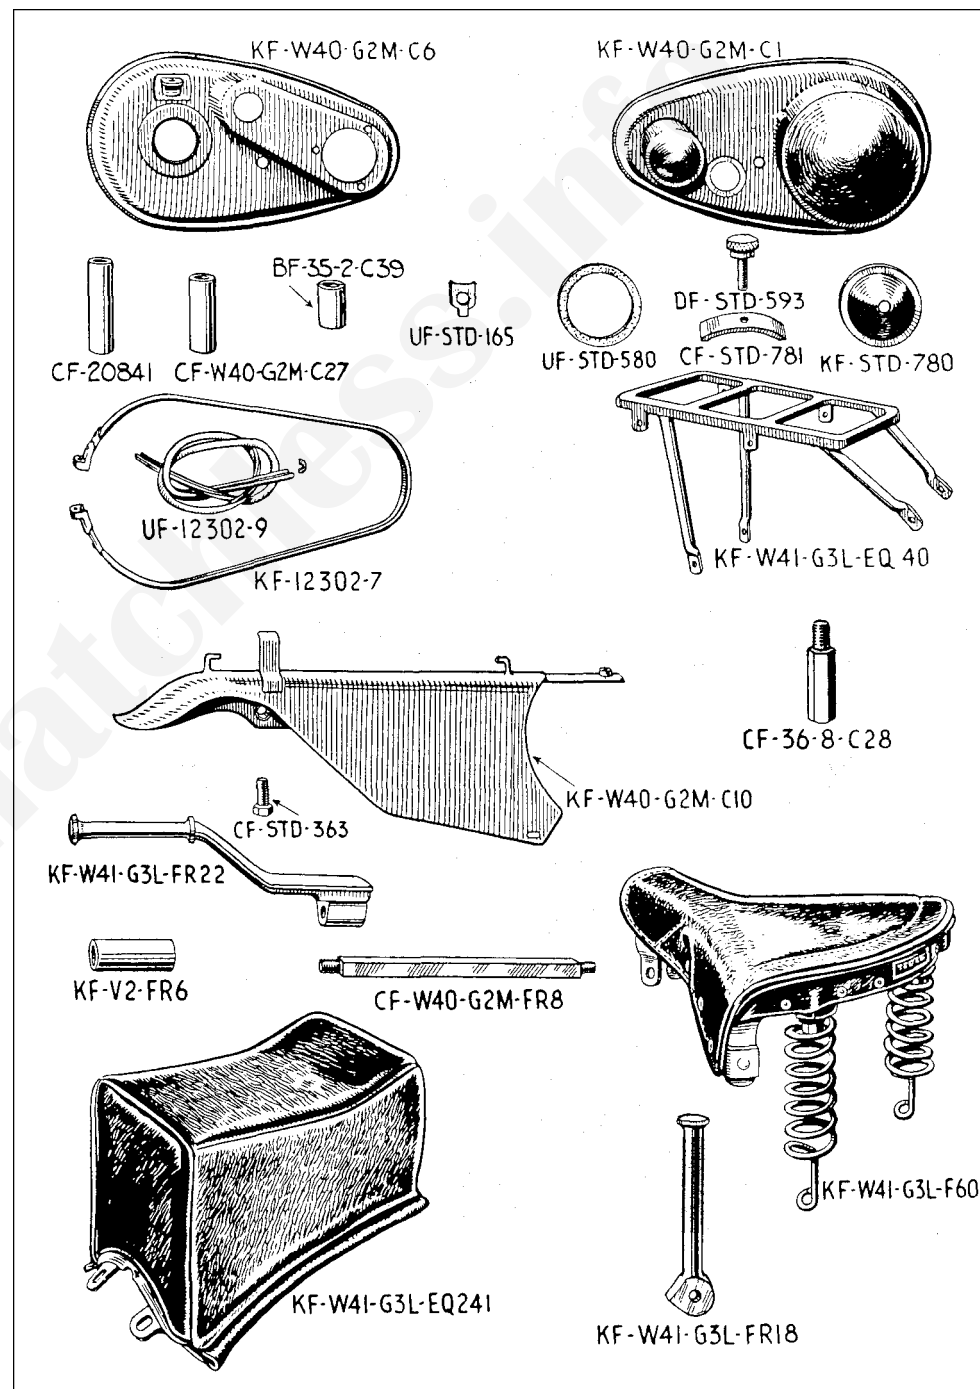

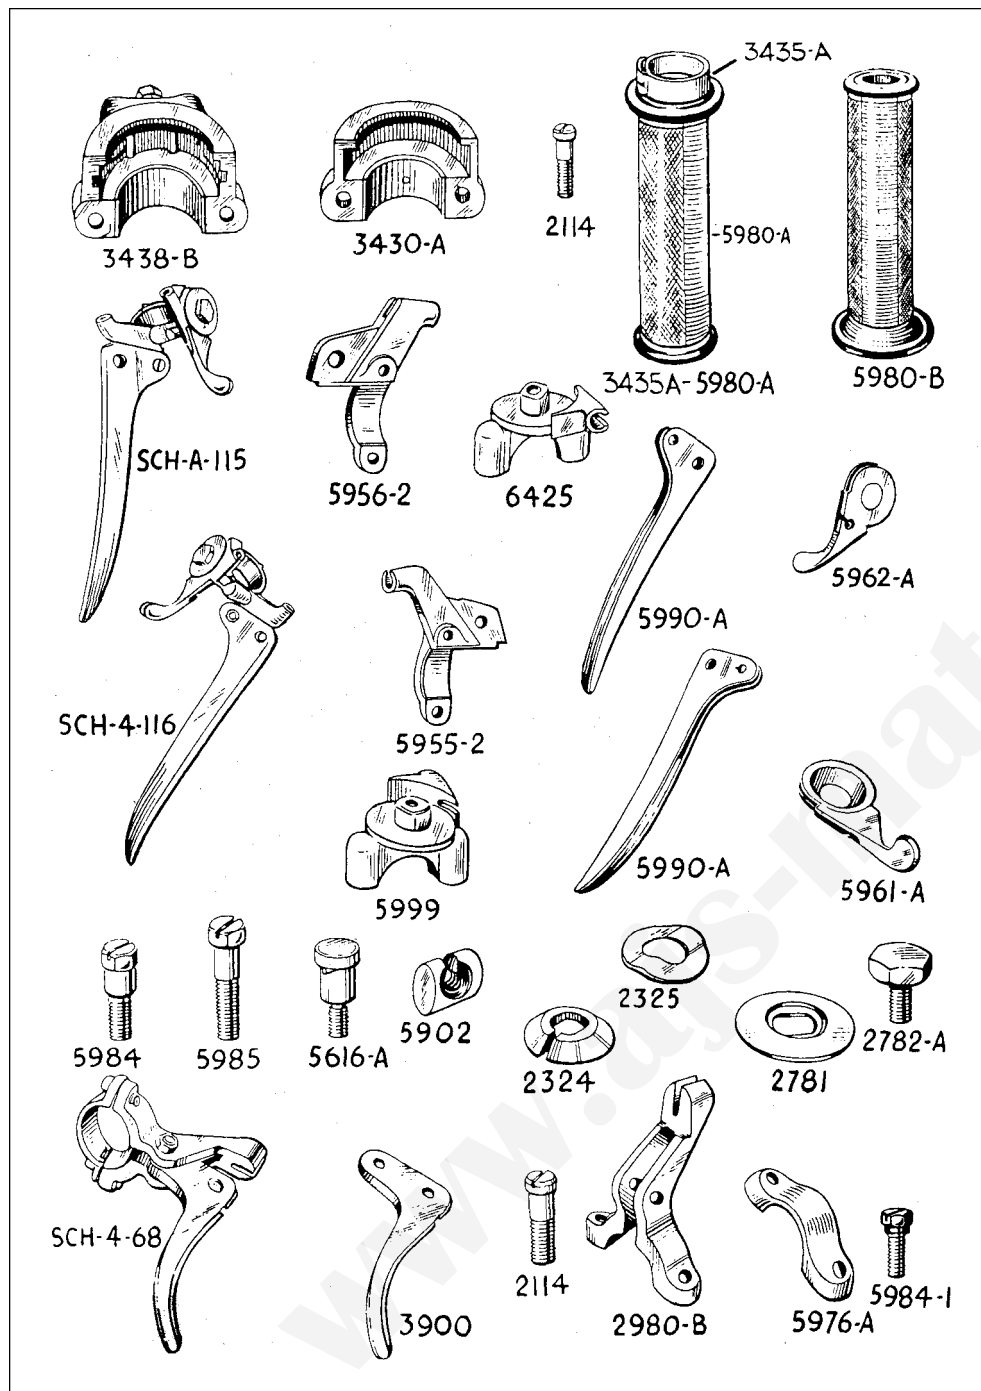**CONTROL LEVER SECTION.**

| Description. | Qty. | Price Each. | Part Number. |
|-------------------------------------|------|-------------|---------------|
| | | £ s. d. | |
| TWIST GRIP. | | | |
| Twist grip, complete | 1 | ... | SCH-4-139 |
| Half clip, with friction spring | 1 | ... | 3438-B |
| Half clip, plain | 1 | ... | 3430-A |
| Screw, clamping half clips | 2 | ... | 2114 |
| Friction spring | 1 | ... | 3436-A |
| Adjusting bolt, for friction spring | 1 | ... | BC-40 |
| Lock nut, for adjusting bolt | 1 | ... | BC-41 |
| Sleeve, less rubber grip | 1 | ... | 3435-A |
| Rubber grip, only, for sleeve | 1 | ... | 5980-A |
| Sleeve, with rubber grip fitted | 1 | ... | 3435-A-5980-A |
| Split adaptor, for throttle casing | 1 | ... | 3434 |

DUMMY GRIP.

| | | | |
|------------|---|-----|--------|
| Dummy grip | 1 | ... | 5980-B |
|------------|---|-----|--------|

CLUTCH AND IGNITION CONTROLS.

| | | | |
|-----------------------------------|---|-----|-----------|
| Lever assembly, complete | 1 | ... | SCH-4-115 |
| Body, only, for clutch lever | 1 | ... | 5956-2 |
| Body, only, for ignition lever | 1 | ... | 6425 |
| Lever, only, for clutch (long) | 1 | ... | 5990-A |
| Lever, only, for ignition (short) | 1 | ... | 5962-A |

BRAKE AND AIR CONTROLS.

| | | | |
|-------------------------------|---|-----|-----------|
| Lever assembly, complete | 1 | ... | SCH-4-116 |
| Body only, for brake lever | 1 | ... | 5955-2 |
| Body, only, for air lever | 1 | ... | 5999 |
| Lever, only, for brake (long) | 1 | ... | 5990-A |
| Lever, only, for air (short) | 1 | ... | 5961-A |

FITTINGS FOR CLUTCH, BRAKE, IGNITION AND AIR LEVERS.

| | | | |
|--------------------------------------|---|-----|--------|
| Boh, clamping bodies (with sleeve) | 1 | ... | 5984 |
| Bolt, clamping bodies (plain) | 1 | ... | 5985 |
| Fulcrum screw, for long levers | 1 | ... | 5616-A |
| Nut, large, for fulcrum screw | 1 | ... | 5931 |
| Nut, small, for fulcrum screw | 1 | ... | 5932 |
| Roller adaptor, for long levers | 1 | ... | 5902 |
| Fibre washer, grey, for short levers | 1 | ... | 2324 |
| Spring washer, for short levers | 1 | ... | 2325 |
| Central screw, for short levers | 1 | ... | 2782-A |
| Cap, for short levers | 1 | ... | 2781 |

The quantities given above are those for one lever assembly only

EXHAUST LIFTER LEVER.







| | | | |
|---|---|-----|----------|
| Exhaust lifter lever, complete assembly | 1 | ... | SCH-4-68 |
| Exhaust lifter lever, only | 1 | ... | 3900 |
| Fulcrum screw, for exhaust lifter lever | 1 | ... | 2114 |
| Nut, for fulcrum screw | 8 | ... | 5984-1 |
| Body, bare, for exhaust lifter lever | 1 | ... | 2980-B |
| Half clip, for lever body | 1 | ... | 5976-A |
| Screw, clamping half clip | 2 | ... | 59841-1 |


CONTROL CABLE SECTION.

THE COMPLETE CONTROL CABLES LISTED IN THE FOLLOWING SIX PARAGRAPHS INCLUDE ALL THE PARTS THAT MUST BE THREADED ON THE INNER CABLES BEFORE THE NIPPLES ARE FITTED. THEY ARE ASSEMBLED READY FOR USE.

THE INNER WIRES DO NOT INCLUDE THE NIPPLES AND THE OUTER CASINGS DO NOT INCLUDE THE END FERRULES.

| Description. | Qty. | Price Each. | Part Number. |
|---|------|-------------|--------------|
| £ s. d. | | | |
| FRONT BRAKE CABLE. | | | |
| Front brake cable, complete, assembled | 1 | ... | 41-B-1 |
| Inner wire, bare, 44in. | 1 | ... | 12-44 |
| Nipple, for inner wire, brake end | 1 | ... | 993 |
| Nipple, for inner wire, handlebar end | 1 | ... | 5538 |
| Outer casing, bare, 38in. | 1 | ... | 12C-38 |
| Ferrule, for outer casing | 2 | ... | 12E |
| Clip, to cover grease patch on casing | 1 | ... | STD-50 |
| Knurled adjuster, for brake cable | 1 | ... | 16365 |
| Lock nut, for knurled adjuster | 1 | ... | 16363 |
| Yoke end, for front brake cable | 1 | ... | 16482 |
| Pin, for yoke end | 1 | ... | STD-736 |
| Split pin, for yoke end pin | 1 | ... | STD-14 |
| CLUTCH CABLE. | | | |
| Clutch cable, complete, assembled | 1 | ... | 41-C-1 |
| Inner wire, bare, 53½in. | 1 | ... | 12-53½ |
| Nipple, for inner wire, gear box end | 1 | ... | 4 |
| Nipple, for inner wire, handlebar end | 1 | ... | 5538 |
| Outer casing, bare, 47½in. | 1 | ... | 12C-47½ |
| Ferrule, for outer casing | 2 | ... | 12E |
| Clip, to cover grease patch on casing | 1 | ... | STD-50 |
| Adjuster, for clutch casing | 1 | ... | 20876 |
| Lock nut, for cable adjuster | 1 | ... | STD-612 |
| VALVE LIFTER CABLE. | | | |
| Valve lifter cable, complete, assembled | 1 | ... | 41-V-1 |
| Inner wire, bare, 34in. | 1 | ... | 12-34 |
| Nipple, for inner wire, engine end | 1 | ... | 993 |
| Nipple, for inner wire, handlebar end | 1 | ... | 2368 |
| Outer casing, bare, 30in. | 1 | ... | 12C-30 |
| Ferrule, for outer casing | 2 | ... | 12E |
| Clip, to cover grease patch on casing | 1 | ... | STD-50 |
| Armoured sheath, for outer casing | 1 | ... | STD-709 |
| Adjuster, for valve lifter cable | 1 | ... | 11751 |
| Lock nut, for cable adjuster | 1 | ... | STD-622 |
| IGNITION CONTROL CABLE. | | | |
| Ignition cable, complete, assembled | 1 | ... | 39-I-1 |
| Inner wire, bare, 45in. | 1 | ... | 11-45½ |
| Nipple, for inner wire, magneto end | 1 | ... | MC4 |
| Nipple, for inner wire, handlebar end | 1 | ... | 3327 |
| Outer casing, bare, 40in. | 1 | ... | 11C-39½ |
| Ferrule, for outer casing | 2 | ... | 11E |
| Clip, to cover grease patch on casing | 1 | ... | STD-50 |
| Rubber cap, for cable entry to magneto | 1 | ... | MC9 |
| Cable adjuster, with lock nut | 1 | ... | MC7-8 |
| Cable sleeve (screws into magneto) | 1 | ... | MC6 |
| Cable return spring | 1 | ... | MC5 |
| THROTTLE CONTROL CABLE. | | | |
| Throttle cable, complete, assembled | 1 | ... | 41-T-1 |
| Inner wire, bare, 42½in. | 1 | ... | 11-42½ |
| Nipple, for inner wire, carburettor end | 1 | ... | 1482 |
| Nipple, for inner wire, handlebar end | 1 | ... | 3327 |
| Outer casing, bare, 36½in. | 1 | ... | 11C-36½ |
| Ferrule, for outer casing | 2 | ... | 11E |
| Clip, to cover grease patch on casing | 1 | ... | STD-50 |
| Cable adjuster | 1 | ... | 14-035 |
| AIR CONTROL CABLE. | | | |
| Air cable, complete, assembled | 1 | ... | 41-A-1 |
| Inner wire, bare, 37in. | 1 | ... | 11-37 |
| Nipple, for inner wire, carburettor end | 1 | ... | 1482 |
| Nipple, for inner wire, handlebar end | 1 | ... | 3327 |
| Outer casing, bare, 31in. | 1 | ... | 11C-31 |
| Ferrule, for outer casing | 2 | ... | 11E |
| Clip, to cover grease patch on casing | 1 | ... | STD-50 |
| Cable adjuster | 1 | ... | 14-035 |

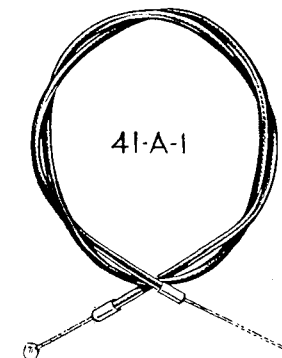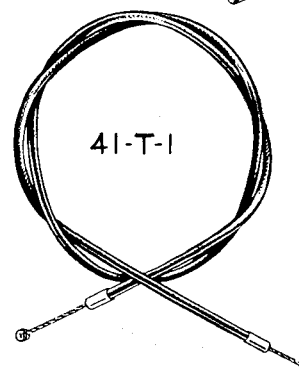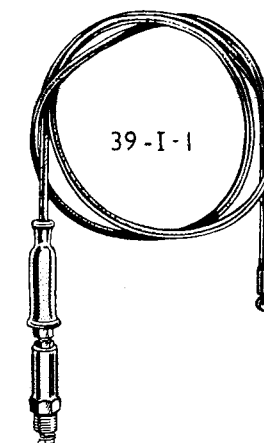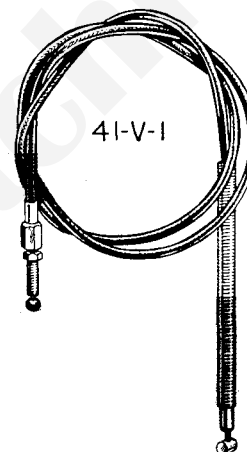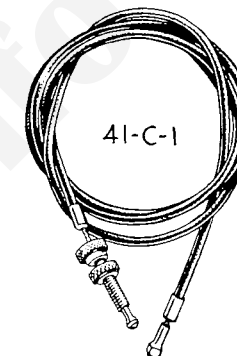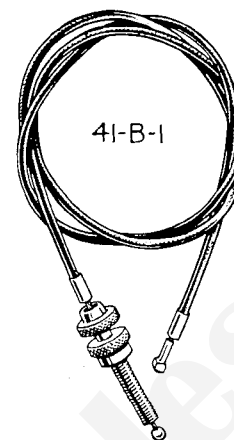

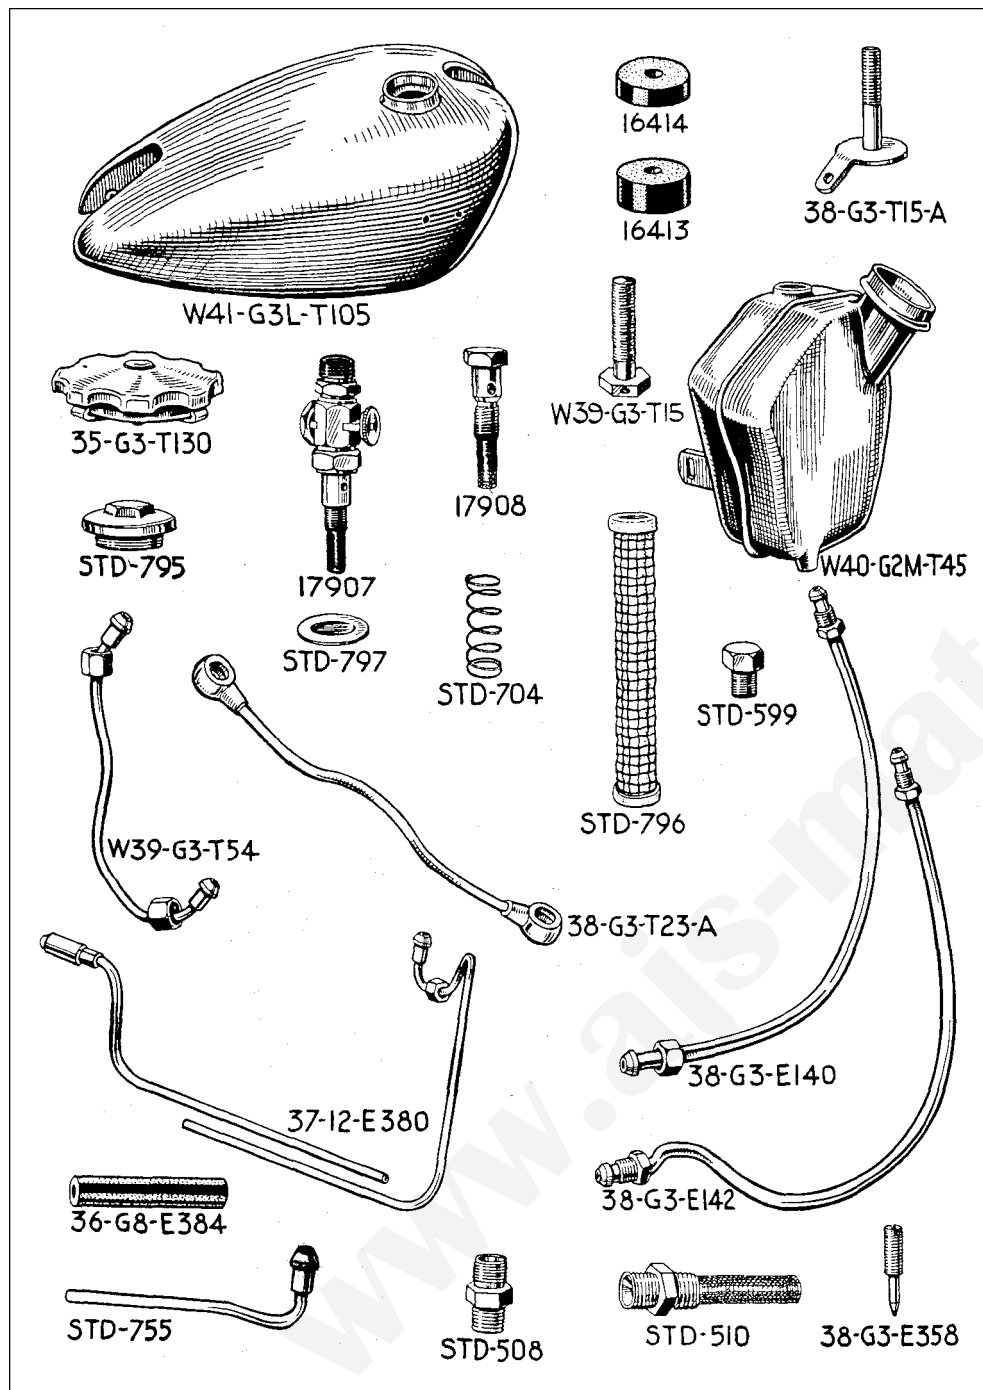**TANK SECTION.**

| Description. | Qty. | Price Each. | Part Number. |
|---|------|-------------|-----------------|
| £ s. d. | | | |
| PETROL TANK. | | | |
| Petrol tank, bare, Khaki-green | 1 | ... | KF-W41-G3L-T105 |
| Bolt, fixing tank to frame, front | 2 | ... | 38-G3-T15-A |
| Bolt, fixing tank to frame, rear right | 1 | ... | 38-G3-T15-A |
| Bolt, fixing tank to frame, rear left | 1 | ... | W39-G3-T15 |
| Rubber pad, thick, for tank fixing bolts | 4 | ... | 16413 |
| Rubber pad, thin, for tank fixing bolts | 3 | ... | 16414 |
| There is no Thin Rubber Pad on the rear left tank fixing bolt | | | |
| Metal washer, for tank fixing bolts | 5 | ... | STD-173 |
| There are two metal washers on the rear left tank fixing bolt | | | |

PETROL TANK FITTINGS.

| | | | |
|---|---|-----|-------------|
| Filler cap, for petrol tank | 1 | ... | 35-G3-T130 |
| Washer, only, for filler cap | 1 | ... | AT-30-C |
| Tap, for petrol supply | 1 | ... | 17907 |
| Banjo pin, for tank connection pipe | 1 | ... | 17908 |
| Fibre washer, small, for tap and pin | 2 | ... | STD-200 |
| Fibre washer, large, for tap and pin | 2 | ... | STD-201 |
| Wing emblem, for tank, left side | 1 | ... | 38-G3-T57-L |
| Wing emblem, for tank, right side | 1 | ... | 38-G3-T57-R |
| Embossed letter M, for tank, left side | 1 | ... | D5-T500 L |
| Embossed letter M, for tank, right side | 1 | ... | D5-T500-R |
| Screw, fixing letter M and wing emblem | 4 | ... | STD-150 |

OIL TANK.

| | | | |
|-------------------------------------|---|-----|-------------|
| Tank, bare, Khaki-green | 1 | ... | W40-G2M-T45 |
| Filler cap, for oil tank | 1 | ... | 35-G3-T130 |
| Washer, only, for filler cap | 1 | ... | AT-30-C |
| Drain plug, for oil tank | 1 | ... | STD-599 |
| Washer, fibre, for drain plug | 1 | ... | STD-200 |
| Felt filter, or cartridge | 1 | ... | STD-796 |
| Spring, for feltfilter | 1 | ... | STD-704 |
| Dished washer, for filter spring | 1 | ... | STD-797 |
| Screwed cap, for filter compartment | 1 | ... | STD-795 |
| Cork washer, for compartment cap | 1 | ... | STD-583 |

For the nuts and washers fixing the oil tank to the frame see BATTERY CARRIER.

For the bolt, spacers, washer and nut fixing the oil tank to the rear mudguard, see REAR MUDGUARD.

PETROL PIPE AND FITTINGS.

| | | | |
|---|---|-----|-------------|
| Feed pipe, complete with nipples and nuts | 1 | ... | W39-G3-T54 |
| Nipple, for petrol pipe, tank end | 1 | ... | STD-504-N |
| Nipple, for petrol pipe, carburettor end | 1 | ... | 14-026 |
| Union nut, for petrol pipe, tank end | 1 | ... | STD-50 |
| Union nut, for petrol pipe, carburettor end | 1 | ... | 14-042 |
| Tank connection pipe with banjo unions | 1 | ... | 38-G3-T23-A |
| Banjo union, for tank connection pipe | 2 | ... | STD-500 |

OIL PIPES.

| | | | |
|---|---|-----|------------|
| Feed pipe, tank to engine | 1 | ... | 38-G3-E140 |
| Feed pipe, pump to rocker box | 1 | ... | 37-12-E380 |
| Return pipe, engine to tank | 1 | ... | 38-G3-E142 |
| Oil discharge pipe, for release valve | 1 | ... | STD-755 |
| Rubber connection, for rocker box feed pipe | 1 | ... | 36-G8-E384 |

The feed pipe to rocker box (DF-37-12-E380) is in two pieces. The price includes the union nuts but not the rubber connection.

OIL PIPE FITTINGS.

| | | | |
|---|---|-----|------------|
| Oil union in rocker box | 1 | ... | STD-508 |
| Oil union, in oil tank, for oil main feed | 1 | ... | STD-510 |
| Nipple, for rocker feed pipe, top end | 1 | ... | STD-504 |
| Nipple, for rocker feed pipe, bottom end | 1 | ... | STD-509 |
| Nipple, for oil discharge pipe | 1 | ... | STD-505 |
| Union nut, for rocker feed, top end | 1 | ... | STD-504-N |
| Union nut, for rocker feed, bottom end | 1 | ... | 37-12-E385 |
| Union nut, for oil discharge pipe | 1 | ... | STD-504-N |
| Needle adjusting screw | 1 | ... | 38-G3-E358 |
| Lock nut, for needle adjusting screw | 1 | ... | STD-290 |

The needle adjusting screw (CF-38-G3-E358) screws into the right hand side of the cylinder head and regulates the oil supply to the inlet valve guide.

WHEEL AND BRAKE SECTION.

A FRONT WHEEL COMPLETE, WITH ALL FITTINGS, INCLUDES ALL BRAKE PARTS AND HUB BEARINGS, SPINDLE WITH WASHER AND NUT, BUT DOES NOT INCLUDE THE TYRE.

| Description. | Qty. | Price Each. | Part Number. |
|---|------|-------------|--------------|
| £ s. d. | | | |
| FRONT WHEEL. | | | |
| Wheel, with all fittings, Khaki-green | 1 | ... | W41-G3L-H45A |
| Wheel, less all fittings, Khaki-green | 1 | ... | W41-G3L-H45 |
| Rim, 19 in. by 2½ in., Khaki-green | 1 | ... | 40-G3W0-H20 |
| Spoke, left, 5 ¾ in. by 8 G by 10 G | 20 | ... | W41-G3L-H51 |
| Spoke, right, 8 ¾ in. by 9 G by 11 G | 20 | ... | 12399 |
| Nipple, for spoke, left | 20 | ... | 20678 |
| Nipple, for spoke, right | 20 | ... | 20680 |
| Hub shell, with brake drum, bare | 1 | ... | W40-G2M-H19 |
| Grease nipple, angular, for hub shell | 1 | ... | STD-54 |
| Security bolt, for tyre | 1 | ... | 41-G3-HI32 |

FRONT WHEEL BEARINGS.

| | | | |
|--|---|-----|--------------|
| Spindle with roller bearings | 1 | ... | 40-G12M-H10 |
| Felt washer, for bearings | 2 | ... | 11909 |
| Spring ring, for bearings | 1 | ... | 11910 |
| Cup, for felt washer | 1 | ... | 11911 |
| Spacing ring, for felt washer | 1 | ... | 11912 |
| Retaining ring, for felt washer | 3 | ... | 11913 |
| Lock nut, for bearing adjusting ring | 1 | ... | 11914 |
| Adjusting ring, for bearings | 1 | ... | 11915 |
| Nut, locating front brake cover plate | 1 | ... | 40-G12M-H47 |
| Washer, locating front brake cover plate | 1 | ... | 40-G12M-B100 |
| Nut, outside front brake cover plate | 1 | ... | 40-G12M-H46 |
| Nut, left, for spindle | 1 | ... | STD-1 |
| Washer, for spindle | 1 | ... | STD-8 |


A REAR WHEEL, COMPLETE WITH ALL FITTINGS, INCLUDES ALL BEARINGS ASSEMBLED, BUT DOES NOT INCLUDE THE CENTRE SOLID SPINDLE, AXLE WASHERS, AXLE NUTS, BRAKE PARTS, SPEEDOMETER DRIVE, SPROCKET AND TYRE.

REAR WHEEL.


| | | | |
|--|----|-----|---------------|
| Wheel, with all fittings, Khaki-green | 1 | ... | W41-G3L-H31-A |
| Wheel, less all fittings, Khaki-green | 1 | ... | W41-G3L-H31 |
| Rim, 19 in. by 2½ in., Khaki-green | 1 | ... | 40-G3W0-H21 |
| Spoke, 8 ¾ in. by 6 G by 9 G (left or right) | 40 | ... | 39-8-H54 |
| Nipple, for spoke (left or right) | 40 | ... | 12344 |
| Hub shell, bare | 1 | ... | W41-G3L-H2 |
| Grease nipple, angular, for hub shell | 1 | ... | STD-54 |
| Security bolt, for tyre | 1 | ... | 41-G3-HI32 |

REAR WHEEL BEARINGS.


| | | | |
|---|---|-----|---------------|
| Hollow spindle with roller bearings | 1 | ... | 11905 |
| Felt washer, for bearings | 2 | ... | 11909 |
| Spring ring, for bearings | 1 | ... | 11910 |
| Cup, for felt washer | 1 | ... | 11911 |
| Spacing ring, for felt washer | 1 | ... | 11912 |
| Felt retaining ring, small hole | 3 | ... | 11913 |
| Lock nut, for bearing adjusting ring | 1 | ... | 11914 |
| Adjusting ring, for bearings | 1 | ... | 11915 |
| Centre solid spindle | 1 | ... | W41-G3L-H4-A |
| Distance piece, for spindle (next to cover plate) | 1 | ... | W41-G3L-H106 |
| Distance piece, for spindle (fits in fork end) | 1 | ... | W41-G3LB-54 |
| Distance piece, for speedometer gear box | 1 | ... | W41-G3L-H26-S |
| Nut, left, for solid spindle | 2 | ... | STD-2 |
| Washer, for solid spindle | 2 | ... | STD-9 |

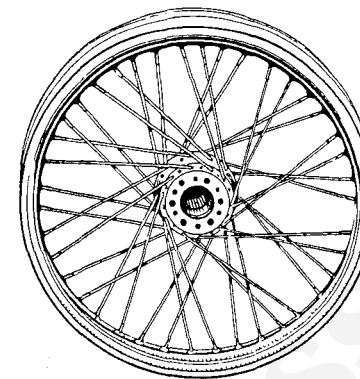

KF-W41-G3L-H31

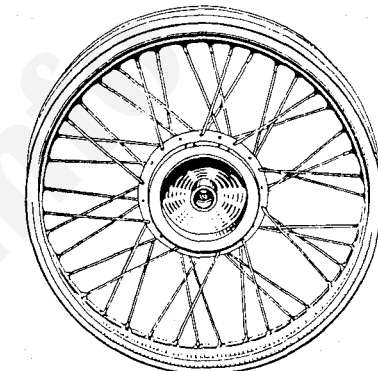

KF-W41-G3L-H45

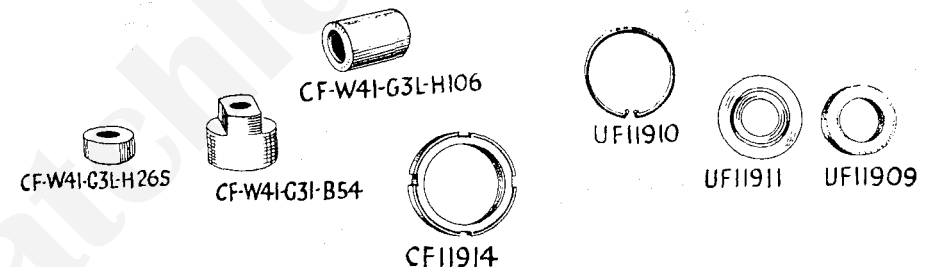

CF-W41-G3L-H4-A



CF-I1915



UF-I1913



UF-I1912




NF-STD-54



UF-I1905




CF-40-G12M-H47




UF-40-G12M-H10






W40-G2M-B115



40-G12M-B60



W41-G3L-B20




41-8-B73




41-12-B71-A



40-G12M-B7F



36-12-B51



20408



40-G12M-B65




STD-51




STD-54




38-12-B30

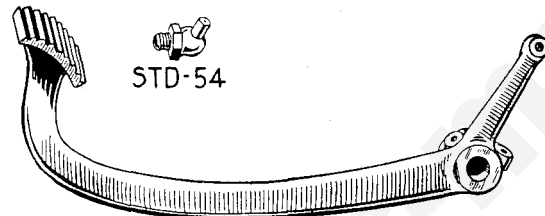


37-G3-B1



37-8-B7



37-G3-B8



37-G3-B2



37-G3-B3



37-G3C-B5



STD 736



STD-735



36-G3-B18



11772



STD-615

FRONT BRAKE.

| Description. | Qty. | Price Each. | Part Number. |
|---|------|-------------|--------------|
| Brake drum, bare | 1 | ... | W40-G2M-B115 |
| Screw, fixing brake drum to hub shell | 8 | ... | STD-140 |
| Cover plate, for brake shoes | 1 | ... | 40-G12M-B60 |
| Anchor bolt, for brake cover plate | 1 | ... | 40-G12M-B7F |
| Washer, for anchor bolt | 1 | ... | STD-11 |
| Nut, for anchor bolt | 1 | ... | STD-4 |
| Split pin, for brake anchor bolt | 1 | ... | STD-14 |
| Brake linings, with rivets, per pair | 1 | ... | 3836-3 |
| Rivets, for brake linings, per set | 16 | ... | STD-105 |
| Spring, for brake shoes | 2 | ... | 20408 |
| Expander, or cam, for brake shoes | 1 | ... | 36-12-B51 |
| Lever, for brake shoe expander | 1 | ... | 40-G12M-B65 |
| Grease nipple, for brake expander | 1 | ... | STD-51 |
| Washer, for brake expander | 1 | ... | STD-174 |
| Nut, for brake expander | 1 | ... | STD-4 |
| Brake shoes, with linings and collars, per pair | 1 | ... | 41-12-B71-A |
| Brake expander thrust collar, adjusting | 2 | ... | 41-8-B73 |

REAR BRAKE.

| | | | |
|---|----|-----|-------------|
| Brake cover plate, bare | 1 | ... | W41-G3L-B20 |
| Anchor bolt, for brake cover plate | 1 | ... | 37-8-B7 |
| Nut, for brake cover plate anchor bolt | 1 | ... | STD-3 |
| Lock nut, for brake cover plate anchor bolt | 1 | ... | STD-73 |
| Split pin, for brake cover plate anchor bolt | 1 | ... | STD-6 |
| Brake linings, with rivets, per pair | 1 | ... | 3836-3 |
| Rivets, for brake linings, per set | 16 | ... | STD-105 |
| Spring, for brake shoes | 2 | ... | 20408 |
| Expander, or cam, for brake shoes | 1 | ... | 36-12-B51 |
| Lever, for brake shoe expander | 1 | ... | 38-12-B30 |
| Grease nipple, for brake expander | 1 | ... | STD-51 |
| Washer, for brake expander | 1 | ... | STD-174 |
| Nut, for brake expander | 1 | ... | STD-4 |
| Brake shoes, with linings and collars, per pair | 1 | ... | 41-12-B71-A |
| Brake expander thrust collar, adjusting | 2 | ... | 41-8-B73 |

For the rear brake drum and sprocket, fixing bolts and nuts, see the TRANSMISSION SECTION.

REAR BRAKE OPERATING PARTS.

| | | | |
|---|---|-----|-----------|
| Rear brake foot pedal, Khaki-green | 1 | ... | 37-G3-B1 |
| Bush, for foot pedal | 1 | ... | 37-G3-B3 |
| Grease nipple, angular, for foot pedal | 1 | ... | STD-54 |
| Spindle, for foot pedal | 1 | ... | 37-G3-B2 |
| Plain washer, for foot pedal spindle | 2 | ... | STD-9 |
| Spring washer, for foot pedal spindle | 1 | ... | STD-194 |
| Nut, for foot pedal spindle | 1 | ... | STD-2 |
| Return spring, for foot pedal | 1 | ... | 37-G3-B8 |
| Adjusting bolt, for foot pedal | 1 | ... | STD-345 |
| Lock nut, for pedal adjusting bolt | 1 | ... | STD-5 |
| Brake rod, bare | 1 | ... | 37-G3C-B5 |
| Yoke end, for front end of rod | 1 | ... | STD-735 |
| Pin, for yoke end | 1 | ... | STD-736 |
| Split pin, for yoke end pin | 1 | ... | STD-14 |
| Spring, for brake rod | 1 | ... | 36-G3-B18 |
| Washer, for brake rod spring | 1 | ... | STD-178 |
| Adjusting clip, for rear end of brake rod | 1 | ... | 11772 |
| Pin, for adjusting clip | 1 | ... | STD-736 |
| Split pin, for adjusting clip pin | 1 | ... | STD-14 |
| Knurled adjusting nut, for brake rod | 1 | ... | STD-615 |

ELECTRICAL SECTION.

| Description. | Qty. | Price Each. | Part Number. |
|--------------|------|----------------|-----------------|
|--------------|------|----------------|-----------------|

£ s. d.

MAGNETO.

| | | | |
|---|---|-----|-------------|
| Magneto, complete (Lucas, Type NI-I-A-O) | 1 | ... | 454-229 |
| High tension pick-up, with brush and spring | 1 | ... | 454-205 |
| Cover, for contact breaker | 1 | ... | M-2648-I-DP |
| Contact breaker point set | 1 | ... | 484-098 |
| Platform, for magneto. Khaki-green | 1 | ... | 37-G3-E76 |
| Bolt, fixing magneto, right, long | 2 | ... | STD-341 |
| Bolt, fixing magneto, left, short | 2 | ... | STD-340 |
| Washer, for magneto fixing bolts | 4 | ... | STD-12 |
| Nut, left, for platform front fixing bolt | 1 | ... | STD-4 |
| Nut, right, for platform front fixing bolt | 1 | ... | 35-G3-E56 |
| Washer, for platform front fixing bolt | 2 | ... | STD-11 |

The magneto platform is mounted above the rear engine plates. The rear end is secured by the bolt on the seat tube bottom lug (see FRAME parts) and the forward end is secured by the dynamo strap crossbar, which is threaded on both ends and the nuts and washers (CF-STD-4, CF-35-G3-E56 and CF-STD-11). listed above, fit on this bar.

DYNAMO.

| | | | |
|--|---|-----|------------|
| Dynamo, complete (Lucas type E3AR-AO5-1) | 1 | ... | 200-430 |
| Brush set, for dynamo | 1 | ... | 200-290 |
| Locating plate, for dynamo | 1 | ... | 35-G3-E275 |
| Screw, fixing locating plate to dynamo | 2 | ... | STD-44 |
| Washer, for locating plate screw | 2 | ... | STD-178 |
| Strap, clamping dynamo | 1 | ... | FE-76 |
| Hinge pin, for clamping strap | 1 | ... | STD-791 |
| Threaded collar, for strap eye | 1 | ... | 35-G3-E277 |
| Bolt, tightening, for clamping strap | 1 | ... | 35-G3-E280 |
| Square crossbar, for clamping strap bolt | 1 | ... | 35-G3-E279 |

VOLTAGE CONTROL UNIT.

| | | | |
|---|---|-----|-------------|
| Voltage regulator and cut-out, complete, Type L33 | 1 | ... | 33020-A-L33 |
| Bolt, fixing regulator to frame | 2 | ... | STD-70 |
| Washer, for regulator fixing bolts | 2 | ... | STD-12 |
| Nut, for regulator fixing bolts | 2 | ... | STD-5 |

BATTERY.

| | | | |
|--|---|-----|-----------|
| Battery, complete, Lead-Acid type, dry | 1 | ... | PUW-7E |
| Battery, complete, Lead-Acid type, charged | 1 | ... | PUW-7E-CH |
| Cover, only, for Lead-Acid Battery | 1 | ... | S-217MB |

BATTERY CARRIER.

| | | | |
|---|---|-----|---------------|
| Battery carrier, complete, Khaki-green | 1 | ... | W36-G3-E185 |
| Back portion of carrier, bare, Khaki-green | 1 | ... | W36-G3-E181-A |
| Front portion of carrier, bare, Khaki-green | 1 | ... | W39-G3-E182 |
| Hinge pin, for battery carrier front | 1 | ... | XE-184 |
| Battery clamping bolt | 1 | ... | AE-180 |
| Seat, for battery clamping bolt | 1 | ... | AE-178 |
| Nut, for battery clamping bolt | 1 | ... | AE-177 |
| Nut, fixing carrier to frame | 2 | ... | STD-4 |
| Washer, for battery fixing nut | 2 | ... | STD-174 |
| Stay, from carrier to chain guard | 1 | ... | DE-181-B |
| Screw, fixing stay to carrier | 1 | ... | STD-40 |

HORN.

| | | | |
|--|---|-----|---------|
| Horn, less switch and bracket (HF-500) | 1 | ... | HF-500 |
| Bolt, fixing horn to plate on frame | 1 | ... | STD-402 |
| Washer, for horn fixing bolt | 1 | ... | STD-10 |
| Nut, for horn fixing bolt | 1 | ... | STD-3 |

| Description. | Qty. | Price Each. | Part Number. |
|--------------|------|----------------|-----------------|
|--------------|------|----------------|-----------------|

£ s. d.

HEAD LAMP.

| | | | |
|---|---|-----------|----------------|
| Head lamp, complete, Khaki-green (DU-42) | 1 | ... | 054673D |
| Outer shell, for head lamp, Khaki-green | 1 | ... | 515-677 |
| Panel, complete with switch and ammeter | 1 | ... | 308-333 |
| Front rim, for head lamp, Khaki-green | 1 | ... | 560-876 |
| Glass, only, for head lamp | 1 | ... | 560-862 |
| Mask, black Manila, (fitted behind glass) | 1 | ... | 560-667 |
| Reflector, f or head lamp, less bulb holders | 1 | ... | NB398-36 |
| Reflector, back shell assembly | 1 | ... | 515-191 |
| Clip and screw assembly, for main bulb holder | 1 | ... | N-890 |
| Main bulb, for head lamp, 6 volts, 24 by 24 watts | 1 | ... | 70 |
| Pilot bulb, for head lamp, 6 volts, 3 watts | 1 | ... | 200 |
| Lamp stay, or bracket, top, left | 1 | ... | W41-G3L-FF74-L |
| Lamp stay, or bracket, top, right | 1 | ... | W41-G3L-FF74-R |
| Lamp stay, or bracket, bottom, left | 1 | ... | W41-G3L-FF73-L |
| Lamp stay, or bracket, bottom, right | 1 | ... | W41-G3L-FF73-R |
| Bolt, fixing stay to fork crown | 2 | ... | STD-360 |
| Washer, for stay fixing bolt | 2 | ... | STD-192 |
| Bolt, fixing lamp to brackets | 2 | ... | 112-209 |
| Washer, for lamp fixing bolts | 2 | ... | 137-141 |
| Washer, "Shakeproof" | 2 | per dozen | 188-366 |

REAR LAMP.

| | | | |
|---|---|-----|---------|
| Rear lamp, complete, less bulb, type L-WD-MCT-1 | 1 | ... | 53000A |
| Rear portion of lamp (bracket body) | 1 | ... | 525-892 |
| Front portion of lamp, with red glass | 1 | ... | 525-906 |
| Bulb holder parts, with Cable | 1 | ... | 525-897 |
| Bulb, for rear lamp, 6 volts, 3 watts | 1 | ... | 200 |
| Bolt, fixing rear lamp | 2 | ... | STD-70 |
| Washer, plain, for lamp fixing bolt | 2 | ... | STD-12 |
| Washer, spring, for lamp fixing bolt | 2 | ... | STD-191 |
| Nut, for lamp fixing bolt | 2 | ... | STD-5 |

SWITCHES.

| | | | |
|--|---|-----------|---------|
| Lighting main switch, for panel in head lamp | 1 | ... | 351-541 |
| Handle, only, for main switch (with screw) | 1 | ... | 351-544 |
| Spring, fixing switch in panel | 1 | per dozen | 308-234 |
| Horn switch, complete | 1 | ... | 762-100 |

ELECTRICAL SUNDRIES.

| | | | |
|--|---|----------|------------------------------|
| Ammeter, for panel in head lamp | 1 | ... | 364-461 |
| Cable harness, complete | 1 | ... | 983-321 |
| Electric light cable, single | Q | per foot | ELC-WO |
| Electric light cable, triple | Q | per foot | ELC-3 |
| Screwed connector, for rear lamp cable | 1 | ... | SA-147 |
| Spark plug (LODGE H-53) | 1 | ... | H-53-678 |
| High tension cable | Q | per foot | STD-543 |
| Terminal, for high tension cable | 1 | ... | STD-541 |
| Suppressor, for sparking plug | 1 | ... | This is a War Office Supply. |

ACCESSORY SECTION.

| Description. | Qty. | Price Each. | Part Number. |
|--------------|------|----------------|-----------------|
|--------------|------|----------------|-----------------|

£ s. d.

SPEEDOMETER.

| | | | |
|--|---|-----|-----------------|
| Speedometer head, only, non-trip, 80 m.p.h. | 1 | ... | S-433-B-EX-5413 |
| Nut, fixing head to bracket | 2 | ... | N-1115 |
| Washer, for head fixing nut | 2 | ... | W-7001 |
| Driving cable, complete, 54in. long | 1 | ... | 53395-1-54 |
| Inner cable, only, 54in. long | 1 | ... | 52108-54 |
| Outer cable, only, 54in. long | 1 | ... | 53398-1-54 |
| Clip, for outer cable | 1 | ... | W41-G3L-F311 |
| Screw, for outer cable clip | 1 | ... | STD-450 |
| Washer, for outer cable clip screw | 1 | ... | STD-190 |
| Gear box, complete | 1 | ... | 52283-2 |
| Bracket, for speedometer | 1 | ... | 40-G12M-FF78 |
| Bolt, fixing speedometer bracket | 2 | ... | STD-342 |
| Washer, for speedometer bracket bolt | 2 | ... | STD-12 |

SPARESLIST MODEL 41-G3L

TOOLS.

| | | | |
|--|---|-----|-------------|
| Tool bag | 1 | ... | 17520 |
| Screwdriver | 1 | ... | LTK-13 |
| Pliers | 1 | ... | LTK-15 |
| Gudgeon pin circlip pliers | 1 | ... | 11024 |
| Grease gun | 1 | ... | LTK-20 |
| Tyre inflator | 1 | ... | 38-G3-EQ2 |
| Tyre lever | 3 | ... | W40-G3-TK29 |
| Spanner, double end, 3/8 in. by 1/4 in. | 2 | ... | W41-G3L-TK1 |
| Spanner, double end, 3/8 in. by 3/8 in. | 1 | ... | W41-G3L-TK2 |
| Spanner, triple end, .80in. by 1.01 in. by 1.200in. | 1 | ... | RTK-3 |
| Spanner, box, for sparking plug | 1 | ... | 17634 |
| Spanner, for dynamo chain adjustment | 1 | ... | RTK-1 |
| Spanner, for hub lock nut | 1 | ... | 11717 |
| Spanner, for contact breaker points | 1 | ... | LTK-5 |
| Adjustable wrench | 1 | ... | LTK-12 |

TOOL BOXES.

| | | | |
|---|---|-----|--------------|
| Tool box, bare, Khaki-green | 1 | ... | W40-G3-F45-1 |
| Knurled screw, for tool box lid | 1 | ... | 37-8-F53 |
| Spring washer, for tool box lid screw | 1 | ... | STD-189 |
| Nut, for tool box lid screw | 2 | ... | STD-5 |
| Bolt, fixing tool box to guard stay | 1 | ... | STD-70 |
| Washer, for stay bolt | 1 | ... | STD-12 |
| Nut, for stay bolt | 1 | ... | STD-5 |
| Bolt, front, fixing box to seat stay | 1 | ... | STD-346 |
| Bolt, rear, fixing box to seat stay | 1 | ... | STD-347 |
| Spacer, for seat stay bolt | 2 | ... | RC-28 |
| Washer, for seat stay bolt | 2 | ... | STD-12 |
| Nut, for seat stay bolt | 2 | ... | STD-5 |
| Stay, for tool box | 1 | ... | W40-G3-F158 |
| Bolt, fixing stay to tool box | 1 | ... | STD-361 |
| Washer, for tool box stay bolt | 1 | ... | STD-11 |
| Nut, for tool box stay bolt | 1 | ... | STD-4 |

For the bolt fixing the stay to the mudguard stay, see " Bolt, fixing guard to front of stay, right " in " REAR MUDGUARD."

CABLE CLIPS.

| | | | |
|------------------------------------|-----|-----|---------|
| Rubber clip, size A | ... | ... | STD-523 |
| Rubber clip, size B | 5 | ... | STD-522 |
| Rubber clip, size C | 4 | ... | STD-521 |
| Rubber clip, size D | 2 | ... | STD-520 |
| Strip aluminium pliable clip | 2 | ... | STD-525 |

The Cable Clips are used to retain the Control cables, the Electric Lighting cables and the Speedometer Driving cable.

GASKET SET.

INDIVIDUAL GASKETS AND WASHERS ARE LISTED IN THE GROUPS TO WHICH THEY BELONG. A COMPLETE SET OF ENGINE GASKETS CAN BE SUPPLIED, AS UNDER :—


| | | | |
|------------------------------|---|-----|-----------|
| Gasket set, for engine | 1 | ... | 41-WO-EQ5 |
|------------------------------|---|-----|-----------|

THE ABOVE SET OF GASKETS CONTAINS : —

| | | |
|---|------------|---|
| 2 | 37-8-E3 | Paper washer, for cylinder base. |
| 2 | STD-582 | Paper washer, for oil pump end caps. |
| 1 | 37-8-E78 | Paper washer, for timing gear cover. |
| 1 | STD-581 | Compo washer, for carburetter. |
| 1 | STD-581 | Compo washer, for carburetter packing piece. |
| 1 | 39-8-E440 | Compo washer, for rocker box. |
| 2 | 38-G4-E368 | Rubber gasket, for cover tube (top). |
| 2 | STD-691 | Rubber gland, for cover tube (bottom). |
| 1 | 38-G4-E65 | Rubber fillet, for tappet cover. |
| 3 | STD-205 | Fibre washer, for tappet cover nuts. |
| 2 | 35-12-E73 | Fibre washer, for tappet guides. |
| 2 | STD-201 | Fibre washer (large), for petrol tap and pin. |
| 2 | STD-200 | Fibre washer (small), for petrol tap and pin. |
| 3 | STD-203 | Fibre washer, for oil hole screws in crankcase. |
| 1 | 12268 | Copper gasket, for cylinder head. |

MATCHLESS

1878 1948

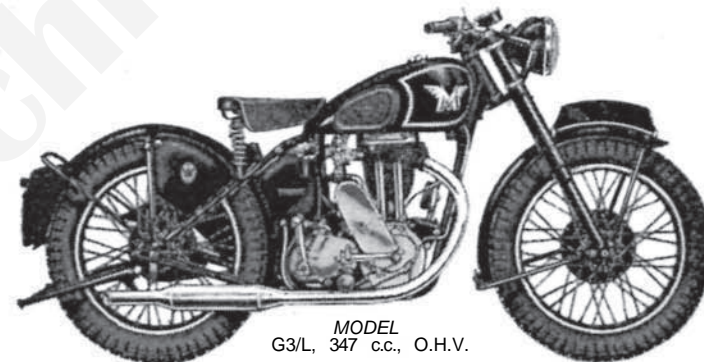

MODEL
G3/L, 347 c.c., O.H.V.

Famous for over Half a Century

Models G3/L 350 c.c. O.H.V. and G80 500 c.c. O.H.V.



The Matchless is a product
of the World's largest
factory devoted solely to the
manufacture of motor cycles

MATCHLESS MOTOR CYCLES, PLUMSTEAD RD., LONDON, S.E.11.